



Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details that ensures the professional in finishing every single job as easy as possible. That's what drives us and keeps us one step ahead.





We proudly introduce to you our 2023-2024 catalogue. Have a look at this year's HiKOKI high performance power tools. All bundled in a clear book. Some you may already know, some are provided with the newest designs and latest technologies our in-house designers and engineers have been working on.



Cordless

Chargers/ Batteries

Drilling

emolitio

astening

ng

olishing & Sanding

Sawing

Cuttii

Planing & Routing

Miscellaneou

neumatic



Contents. Everything to reach the highest performance.





Introduction	2	Demolition		
Contents	4	Rotary Hammer Demolition Hammer	54 59	Cordless
General Information	6	Fastening Screw Driver	62	Chai Batt
Index	8	Impact Wrench	62	Chargers/ Batteries
Technologies	10	Grinding Disc Grinder Hand Grinder	64 69	Drilling
Innovative Highlights	12	Hallu Gillidei	03	ling
		Polishing & Sanding	74	
Cordless		Sander Polisher	71	De
Driver Drill	14	Orbital Sander	71	Demolition
Impact Driver Drill	15	_		itio
Impact Driver	16	Sawing		٦
100 mm Disc Grinder with Slide Switch	19	Circular Saw	74	
125 mm Disc Grinder with Slide Switch	19	Miter Saw	75	T _a
Die Grinder	19	Jig Saw	76	Fastening
Caulking Gun	20	Reciprocating Saw	77	ing
Heat Gun	21	Chain Saw	78	
Planer	21			
Blower	22	Cutting		ত্
Impact Wrench	24	Cutter	78	Grinding
Recipocating Saw	25	Cut-off Machine	79 79	ng
Band Saw	25		,,,	
Work Light	26	Diamina O varitina		
Cut-Out Tool	26	Planing & routing		Poli: Sa
Cleaner	27	Planer	79	shin
Cooler & Warmer Box	28	Router	81	Polishing & Sanding
Multivolt Driver Drill	32	_		
Multivolt Impact Driver Drill	33	Pressure Washer		
Multivolt Impact Driver	34	Pressure Washer	82	Sawi
Multivolt Impact Wrench Multivolt Disc Grinder with Slide Switch	36 30			wing
Multivolt Disc Grinder with Slide Switch Multivolt Recipocating Saw	38 41	Miscellenous		0
Multivolt Recipocating Saw Multivolt Chain Saw	41	Nibbler	84	
Multivolt Chain Saw Multivolt Hedge Trimmer	42	Blower	84	
Multivolt Heage Trimmer Multivolt Grass Trimmer	43 44	Mixer	84	C C
Multivolt Glass Hillinei Multivolt Blower	45	Heat Gun	85	Cutting
Waltivole blower	43	Table Saw	86	
Charger		Pneumatic		_ P
Charger	46	Compressor	86	Planing & Routing
Battery				(C) 20
Battery	48			
Duction y	70			Miscellaneous
Tool Kit				ellan.
10mm Tool Kit	51			eou
13mm Tool Kit	51			
Drilling				Pneumatic
Drill	51			uma
Impact Drill	52			tic

General information.
Good to know before reading.

HiKOKI

Safety

Double-Insulation power tool, indicated by the double square mark (回) can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

General precautions

- Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
- 2. Never let children use the power tool.
- 3. Keep others, especially children, away from the tool.
- 4. Wear eye protector to protect the eyes.
- 5. Never touch blades or cutters during operation.
- 6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
- To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
- 8. Prior to operation, carefully inspect the tool to ensure all the parts properly functioning.
- 9. Immediately stop operation if abnormalities are noted.
- 10. Ensure that motor ventilation opening is kept fully open.
- 11. Always keep the blades and cutters sharp and clean.
- 12. Have the power tool inspected at a proper regular interval by an authorized Service Center.
- 13. Maintain the proper care and cleanliness of the power tool.
- Consult an authorised Service Center for repair and/or part replacement.
- 15. DO NOT use the power tool for any other application than those specified in the handling instructions.
- DO NOT use the tool for work beyond its prescribed capability.
- 17. To avoid possible electric shock, DO NOT use the power tool
- 18. Ensure that the applied voltage is the same as that specified on the nameplate.
- 19. Ensure that electric plug is plugged into a matching receptacle hat is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
- 20. Ensure that the power supply is disconnected after operation.
- 21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
- 22. Always handle the power tool with care.
- 23. Proper posture is essential for safe operation.
- 24. Dress properly and work in proper clothing and shoes.
- 25. Always keep the work area in good order.
- 26. When not in use, store the power tool.
- 27. DO NOT stare into LASER beam.

Power input

HiKOKI power tools employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110V to 240V.

Guarantee

The primary concern of Koki Holdings is the convenience and satisfaction of the customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials. Defects in workmanship and materials – not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling — will be repaired or replaced without charge.


Icons

Single Insulation



Blower Function











Electronic Constant





Control











































INDEX

A			DH 26PC2	Rotary Hammer	55
AC 18DA	Cordless Caulking		DH 28PBY2	Rotary Hammer	55
AC 10DA	Gun	20	DH 28PCY2	Rotary Hammer	55
AW 100	Pressure Washer	82	DH 40MC	Rotary Hammer	56
AW 130	Pressure Washer	82	DH 45MA	Rotary Hammer	56
AW 150	Pressure Washer	83	DH 45ME	Rotary Hammer	56
AVV 130	riessure wastiel	0.5	DH 52ME	Rotary Hammer	57
В			DS 12DA	Cordless Driver Drill	14
<u> </u>			DS 18DA	Cordless Driver Drill	15
BSL 1220M	Battery	49	DS 18DE	Cordless Driver Drill	15
BSL 1240M	Battery	48	DS 36DA	Cordless Driver Drill	31
BSL 1820M	Battery	48	DS 36DC	Cordless Driver Drill	32
BSL 1840M	Battery	48	DV 10VST	Impact Drill	52
BSL 1850MA	Battery	48	DV 13VSS	Impact Drill	52
BSL 36A18	Battery	49	DV 16V	Impact Drill	52
			DV 18DC	Cordless Impact	
C				Driver Drill	16
	BA'Con Cons	75	DV 36DA	Cordless Impact	
C 10FCE2	Miter Saw	75		Driver Drill	33
C 10RJ	Table Saw	86			
C 12FDHB	Miter Saw	75	E		
C 7SS	Circular Saw	74	EC 68	Compressor	86
C 7ST	Circular Saw	74	EC 00	Compressor	00
C 9SA3	Circular Saw	74			
CB 18DBL	Cordless Band Saw	25	F		
CC 14STA	Cut-off Machine	79	FCJ 65V3	Jig Saw	76
CC 14STD	Cut-off Machine	79		3	
CC 14STDU	Cut-off Machine	79	G		
CG 36DB	Cordless Grass			D: 0: 1	
	Trimmer	44	G 10SN2	Disc Grinder	64
CH 3656DA	Cordless Hedge		G 10SS2	Disc Grinder	64
	Trimmer	43	G 10VE2	Disc Grinder	65
CJ 90VST2	Jig Saw	76	G 13SB4	Disc Grinder	65
CM 4SB2	Cutter	78	G 13SR4	Disc Grinder	66
CM 4ST	Cutter	78	G 13SW	Disc Grinder	66
CN 16SA	Nibbler	84	G 15SA2	Disc Grinder	66
CR 13V2	Reciprocating Saw	66	G 1810DA	Cordless 100 mm	19
CR 18DBL	Cordless			Disc Grinder with	
	Reciprocating Saw	25		Slide Switch	
CR 36DA	Cordless		G 1813DA	Cordless 125 mm	19
	Reciprocating Saw	41		Disc Grinder with	
CS 3635DB	Cordless Brushless			Slide Switch	
	Chain Saw	42	G 18BYE	Disc Grinder	67
CS 40Y	Chain Saw	78	G 18SE4	Disc Grinder	68
			G 18SH2	Disc Grinder	67
D			G 18ST	Disc Grinder	67
D 10VSTA	Drill	51	G 18SW2	Disc Grinder	68
D 13VH	Drill	51	G 23SC4	Disc Grinder	69
DB 10DL	Cordless Driver Drill	14	G 23ST	Disc Grinder	68
DB 10DL DB 3DL2	Cordless Driver Drill	14	G 3610DA	Cordless Disc Grinder	38
DH 22PBS	Rotary Hammer	54		with Slide Switch	
DH 24PG2	Rotary Hammer	54 54	G 3610DVE	Cordless Disc Grinder	39
DH 24PG2 DH 26PB2	Rotary Hammer	54 54	G 3618DA	Cordless Disc Grinder	40
DII ZOPDZ	Rotary Hammer	- J4		with Slide Switch	

INDEX



GP 18DA	Cordless Die Grinder	19	UC 18YFSL	Charger	47
			UC 18YG	Charger	47
ш			UC 18YGL2	Charger	47
Н			UC 18YRL	Charger	47
H 60ME	Demolition Hammer	60	UC 18YSL3	Charger	47
H 65SB3	Demolition Hammer	60	UL 18DA	Cordless Cooler	• •
H 90SG	Demolition Hammer	61	OL IODA	& Warmer Box	28
H41 MB2	Demolition Hammer	59	UM 12VST2	Mixer	84
H41 SST	Demolition Hammer	59			
H60 MC (V)	Demolition Hammer	59	UM 16VST2	Mixer	85
			V		
M					
M 12SA2	Router	81	VTP 18	Impact Drill	52
M 12SC	Router	81			
M 18DYA	Cordless Cut-Out Tool	26	W		
			W 6VA4	Screw Driver	62
Р			WH 12DA	Cordless Impact	
				Driver	17
P 20ST	Planer	79	WH 12DD	Cordless Impact	.,
P 18DSL	Cordless Planer	21	WIII IZDD	Driver	17
PDA-100M	Disc Grinder	64	VA/11 40D A		
PDA-125M	Disc Grinder	65	WH 18DA	Cordless Impact Driver	17
PH 65A	Demolition Hammer	60	WH 18DC	Cordless Impact	40
			WIII 40DE	Driver Drill	18
R			WH 18DE	Cordless Impact Driver	18
			WH 36DB	Cordless Impact Driver	34
R 18DSL	Cordless Cleaner	27	WH 36DC	Cordless Impact Driver	35
RB 18DC	Cordless Blower	22	WH 7DL	Cordless Impact Driver	16
RB 36DA	Cordless Blower	45	WR 18DF	Cordless Impact Wrench	24
RB 40SA	Blower	84	WR 18DH	Cordless Impact Wrench	24
RH 18DA	Cordless Heat Gun	21	WR 18DSDL	Cordless Impact Wrench	24
RH 600T	Heat Gun	85	WR 22SE	Impact Wrench	62
RH 650V	Heat Gun	85	WR 25SE	Impact Wrench	62
			WR 36DF	Cordless Impact Wrench	36
S			WR 36DG	Cordless Impact Wrench	37
				·	
S 15SB	Sander Polisher	71			
SAT 180	Sander Polisher	71			
SB 8V2	Orbital Sander	72			
SP 18VA	Sander Polisher	71			
SV 12SG	Orbital Sander	72			
SV 13YA	Orbital Sander	72			
T					
Tool Kit 10mm		<u>51</u>			
Tool Kit 13mm		51			
U					
UB 18DC	Cordless Work Light	26			
UC 3SFL	Charger	46			
UC 7SL	Charger	46			
UC 10SL2	Charger	46			
UC 12SL	Charger	46			
OC 123L	Charger	40			

Cordless

Chargers/ Batteries

rs/

Drilling

Demolition

ing Grinding

Polishing & Sanding

Sawing

Cutting

Planing 8

Miscellaneous

Pneumati



At HiKOKI we believe that not only the design and overall look and feel of each power tool contributes to an increased comfort and ease of use. It's the technology inside that makes the next power tool and job for the professional even better than before.

BRUSHLESS

Due to the more compact designs compared to brushed motors, the brushless motors permit reductions in size and weight of tools for easier handling. Even under heavy use, the brushless motors significantly extend the product life cycles without causing troubles such as armature burnout, layer short or commutator wear. Plus, they do not require the regular replacement of carbon brushes.



One battery pack, two volt classes - the new and innovative MULTI VOLT battery packs. The 36V Lithium-ion battery packs are compatible with 18V class cordless tools. Intelligent connecting technology make it possible. Depending on the tool, the voltage automatically switches to 18V or 36V.

12V PEAK

The new compact and lightweight 10.8 - 12V Peak slide Lithium-ion battery packs are compatible with the new 10.8 - 12V Peak cordless tools.

Li-ion

A built in electronic control circuit for Lithium-ion battery pack is unique. This circuit provides the protection system available to protect and enhance the performance of these batteries. By always keeping the batteries within safe operating conditions, this electronic control ensures that batteries accept more charges than conventional batteries.



UVP (User Vibration Protection) combines internal vibration absorbers and shock absorbing handles for reduced vibration, and improved operating efficiency.



LVH (Low Vibration Handle) consists of the upper unit with rubber dampers and the lower unit with a hinge to reduce vibration and user fatigue.



International Protection (IP) is a standard developed by the International Electrotechnical Commission (IEC) to indicate the degrees of protection provided by enclosures of electrical equipment against access to hazardous parts, ingress of solid foreign objects and ingress of water.



The internal double-insulation construction with an aluminum die-cast body and a plastic stator holder.



When the tool bit is suddenly overburdened during operation, RFC (Reactive Force Control) stops the motor to reduce twisting of the main unit.

TRIPLE HAMMER

The triple hammer has three anvils, making three impacts per rotation instead of the conventional two. This results in reduced vibration and greater comfort with less screw head slippage (cam-out).



Oil Pulse impact drivers use a hydraulic pressure system to generate impact force resulting in high performance with low-noise, low kick-back and reduced cam-out.



A built-in acceleration sensor detects when the tool is tilted and notifies the user to adjust the angle of the tool to achieve a vertical hole (+/-5°) and increase drilling efficiency.



The XACT CUT LED lighting system uses an LED light to cast a shadow where the blade will cut on the material for precise and efficient cutting.



The Air Spring Drive System uses compressed air to drive each nail providing a pneumatic-like feel and resulting in powerful driving force, quick response, consistent driving depth, and low recoil.

BRUSHLESS

Long-lasting efficiency.

The professional no longer has to worry about losing voltage and power when using an extension cord. Our AC Brushless Motor series feature electronic control that offers continuous and constant power output. This technology brings a whole new level of performance and durability to our heavy duty range of power tools. With the innovative AC Brushless Motor you'll experience more power and less energy consumption.

We have also eliminated some major wearing parts, which means a compact and lightweight power tool, less wear and tear and less maintenance. This also contributes to the fact that the motor lasts longer and operates far more efficiently than conventional brushed motors.



3.6V Cordless Driver Drill Li-ion

DB 3DL2

Can be converted from



Features

- Convertible to use in angled or straight
- Spindle lock mechanism
- Adjustable clutch: 21-stage torque
- circuit
- With LED light

	Specifications			
Drive	6.35mm Hex Bit Shank			
	Mid Steel	5mm		
Capacity	Wood Screw (D x L)	3.8 x 38mm		
	Machine Screw	5mm		
Battery Voltage	3.6V			
N. I. d. C I	High	600/min		
No Load Speed	Low	200/min		
Torqure Setting	0.3 - 2.9Nm			
0	Straight	268mm		
Overall Length	Angled	210mm		
Weight	0.45kg	0.45kg		
Standard Accessories*		2 Batteries (EBM315), Charger (UC3SFL), Driver Bit, Carrying Case		

*Standard accessories may vary by country or area

MRP: ₹ 8,760/-

Equipped with battery protection

DB 10DL

10.8V Cordless Driver Drill

Li-ion

Features

- Adjustable clutch: 21-stage torque
- Soft grip handle
- Compact & light weight









Accessories*	

Drill Chuck

Specifications			
Drive	Orive 6.35mm Hex Bit Shank		
Capacity	Soft wood	18mm	
	Wood Screw (D x L)	6mm x 38mm	
	Machine Screw	6mm	
Battery Voltage	10.8V		
No Load Speed	0-400/min		
Maximum Torque in	lock	10Nm	
Torque Setting and C	lutch	1.0-6.0Nm	
Overall Length	147mm		
Weight	0.8kg		
Standard Accessories*	Battery (BCL1015 / BCL1030C), Charger (UC10SL2), Driver Bit, Carrying Case		

*Standard accessories may vary by country or area MRP: ₹ 15,660/-

DS 12DA 10.8-12V Peak Cordless **Driver Drill**

12V PEAK Li-ion

Features

- 20-stage Clutch
- LED light
- Compact & light weight
- Keyless chuck









Conneitu	Soft Wood	29mm	
Capacity	Wood Screw	5.8mm	
	Machine Screw	6mm	
Battery Voltage	10.8-12V Peak		
No Load Spood	High	0-1,400/min	
No Load Speed	Low	0-350/min	
Max Torque Hard		38Nm	
Max Torque Soft		15Nm	
Torque Setting	0.6 -4.0Nm		
Overall Length	166mm		
Weight	1.1kg with BSL1225M/BSL1215		
vveignt	1.2kg with BSL1240M		
Standard Accessories*	2 Batteries (BSL1225M), Charger (UC12SL), Battery Cover, Carrying Case		

Specifications

0.8-10mm Keyless Mild Steel

Soft Wood

*Standard accessories may vary by country or area

10mm

29mm

MRP: ₹ 20,000/-















DS 18DA

18V Cordless Driver Drill

Li-ion

Features


Compact and lightweight

High capacity battery with battery level indicator

20 Stage clutch

2 Speed gear

Specifications			
Drill Chuck	2.0-13mm Keyless		
	Mild Steel	13mm	
Compositu	Soft Wood	36mm	
Capacity	Wood Screw (D X L)	6 x 75mm	
	Machine Screw	6mm	
Battery Voltage	18V		
No Load Coood	High	0-1,400/min	
No Load Speed	Low	0-350/min	
Max Torque Hard		50Nm	
Max Torque Soft		18Nm	
Overall Length	173mm		
Weight	Kg	1.3kg (BSL1820M), 1.9kg (BSL36B18)	
Standard Accessories*	/ II(187513) Driver Rit Rattery Cover		









DS 18DE

18V Cordless

*Standard accessories may vary by country or area



Features

- 155 mm compact head
- Easy to Use in Tight Spaces
- **Drills Fast and Easy**

Brake

Reactive Force Control

Specifications			
Drill Chuck	1.5 - 13mm Keyless		
	Brick	13mm	
	Mild Steel	13mm	
Capacity	Soft Wood	52mm	
Capacity	Wood Screw (DxL)	10x100mm	
	Machine Screw	6mm	
Battery Voltage	18V		
No Load Coood	High	0-2000/min	
No Load Speed	Low	0-550/min	
May Tarqua	High	70Nm	
Max Torque	Soft	40Nm	
Overall Length		155mm	
1.7kg (with BSL1840M) Weight 1.9kg (with BSL1850MA / BSL36A 2.2kg (with BSL36B18)		0MA / BSL36A18)	
Standard Accessories*		0M / BSL1850MA / r (UC18YFSL / UC18YSL3), attery Cover, Carrying	

MRP: ₹ 14,620/-(Bare Tool)-

*Standard accessories may vary by country or area







Variable Speed





STOP



15

DV 18DC

18V Cordless Impact Driver Drill

Li-ion **BRUSHLESS**



Features

- 190 mm compact head
- Side handle is easy to use and easily adjustable at 11 different positions

Specifications			
Drill Chuck	1.5 - 13mm Keyless		
	Brick	20mm	
	Mild Steel	16mm	
Capacity	Soft Wood	102mm	
Capacity	Wood Screw (DxL)	12x100 mm	
	Machine Screw	6mm	
Battery Voltage	18V		
No Lood Coood	High	0-2,000/min	
No Load Speed	Low	0-500/min	
Impact Rate	0-30,000/min		
May Torque	Hard	140Nm	
Max Torque	Soft	70Nm	
Overall Length	190mm		
	2.6kg (with BSL	1840M)	
Weight	2.8kg (with BSL36A18 / BSL1850MA)		
	3.1kg (with BSL36B18)		
Standard Accessories*	2 Batteries (BSL36A18 / BSL1850MA / BSL1840M), Charger (UC18YSL3 / UC18YFSL), Driver Bit, Side Hanldle, Hook, Battery Cover, Carrying Case		







Specifications

6.35mm Hex Bit Shank

3-8mm

3-6mm

3-8mm

25Nm

0-2,400/min

0-3,000/min

282mm

211mm

0.59kg

7.2V

Bolt

Bolt **Small Screw**

Straight

L shape

High Tension







Capacity

Tightening Torque

Full Load Impact Rate

Battery Voltage

No Load Speed

Overall Length

Weight

Drive

WH 7DL

7.2V Cordless **Impact Driver**



Features

- Convertible to use in angled or straight
- Automatic spindle lock mechanism for manual tightening







	Standard	Batteries (BCL715), Charger (UC7SL), Battery		
	Accessories*	Cover, Carrying Case		
MRP: ₹ 16,140/-		10/- *Star	ndard accessories may vary by country or area	
















WH 12DA

10.8-12V Peak **Cordless Impact Driver**







Capacity

Tightening Torque





Battery Voltage		10.8-12V Peak
No Load Speed		0-2,700/min
Full Load Impact Ra	ate	0-3,200/min
Overall Length	150mm	
Weight	Veight 1.1kg (with BSL122 (with BSL1240M)	
Standard Accessories*	2 Batteries (BSL122 Charger (UC12SL), Case	

Specifications

6.35mm Hex Bit Shank

High Tension Bolt | 5-10mm

Bolt

Small Screw

*Standard accessories may vary by country or area

HiKOKI

5-12mm

4-8mm

110Nm

MRP: ₹ 10,000/-(Bare Tool)

WH 12DD

LED light

10.8-12V Peak **Cordless Impact Driver**

Compact & light weight

12V PEAK Li-ion BRUSHLE55

Features

- 134mm compact head
- 3 tightening modes (soft/power/self-drilling screw)
- **LED Light**











Bolt	5-14mm
High Tension Bolt	5-12mm
Small Screw	4-8mm
Self drilling Screw	3.5-5mm
6.35mm Hex Bit Shank	
ue	135Nm
	10.8-12V Peak
Power Mode	0-3,200/min
Soft Mode	0-1,300/min
Self Drilling Screw Mode	0-3,200/min
Power Mode	0-4,000/min
Soft Mode	0-2,500/min
Self Drilling Screw Mode	0-4,000/min
134mm	
1.1kg	
2 Batteries (BSL1240M), Charger (UC12SL),	
Battery Cover, Carrying Case	
	High Tension Bolt Small Screw Self drilling Screw 6.35mm Hex Bit Shank LIE Power Mode Soft Mode Self Drilling Screw Mode Power Mode Soft Mode Self Drilling Screw Mode 134mm 1.1kg 2 Batteries (BSL1240M), Ch

Specifications

*Standard accessories may vary by country or area

WH 18DA

18V

Cordless Impact Driver



Features

- Compact and lightweight
- High capacity battery with battery level indicator
- LED light
- Easy to use in tight spaces

Brake









	Machine Screw	4 - 8mm
Capacity	Bolt	M5 - M14
	High Tension Bolt	M5 - M12
Tightening Torque	140Nm	
Battery Voltage	18V	
No Load Speed	0 - 2,700/min	
Impact Rate	0 - 3,600/min	
Overall Length	150mm	
Weight	1.3kg (with BSL1820M)- 1.9kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YSL3 / UC18YKSL), Battery Cover, Carrying Case	

Specifications

MRP: ₹ 22,000/-

*Standard accessories may vary by country or area











WH 18DC

18V Cordless Impact Driver

Features

- Bright 3 LEDs working light
- Powerful brushless motor delivers fast tightening
- 5 Tightening modes with Triple Hammer
- IP56 dust & water resistance

	Specifications	
	Small Screw	4 - 10mm
C	Ordinary Bolt	5 - 18mm
Capacity	High Strength Bolt	5 - 14mm
	Self Drilling Screw	ø3.5 - ø6mm
Drive	6.35mm	
Max. Tightening Torque	210Nm	
Battery Voltage	18V	
	Soft Mode	0 - 900/min
	Power Mode	0 - 3,400/min
No Load Speed	Bolt Mode	0 - 2,900/min
No Load Speed	Bolt Single Mode	0 - 2,900/min
	Self Drilling Screw Mode	0 - 3,700/min
	Soft Mode	0 -1,900/min
	Power Mode	0 - 4,000/min
Impact Rate	Bolt Mode	0 - 4,000/min
ilipact Nate	Bolt Single Mode	0 - 4,000/min
	Self Drilling Screw Mode	0 - 2,100/min
Overall Length	114mm	
Weight	1.6kg (BSL36A18), 1.	9kg (BSL36B18)
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Hook, Carrying Case	











Capacity

WH 18DE

18V

Cordless Impact Driver

Li-ion BRUSHLESS

Features

- Compact, simple and easy to use
- Stays running at low speeds and are suitable for delicate work
- Highly responsive trigger switch



6	

	Drive		6.35mm
	Tightening Torqu	ie	175Nm
	Battery Voltage		18V
	No Load Speed		0 - 3,100/min
	Impact Rate		0 - 3,400/min
.	Overall Length		120mm
	Weight	1.5kg (BSL1840M) 1.6kg (BS 1.9kg (BSL36B18)	SL1850MA)
STOP	Standard Accessories*	Batteries (BSL1840M), Char Hook, Battery Cover, Carryi	

Specifications

Small Screw

Ordinary Bolt

High Strength Bolt

*Standard accessories may vary by country or area

4 - 8mm

5 - 16mm

5 - 12mm

MRP: ₹ 18,400/- (Bare Tool)











19



G 1810DA

18V Cordless 100 mm

Disc Grinder with Slide





Features

- 750W max output
- Small grip circumference
- Easy to maintain mesh dust filter
- Kickback protection
- Restart protection



*Standard accessories may vary by country or area

MRP: ₹ 35,200/-

G 1813DA

18V Cordless 125 mm

Disc Grinder with Slide Switch



Features

- 750W max output
- Small grip circumference
- Easy to maintain mesh dust filter
- Kickback protection
- Restart protection

Specifications		
	Wheel Dia	125mm
Capacity	Hole Dia	22.23mm
	Thickness	6mm
Spindle Thread	M14 x 2	
Battery Voltage	18V	
No Load Speed	8,000/min	
Overall Length	358mm	
Weight	2.7kg (with BSL1850MA) 3.1kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger (UC18YSL3), Side Handle, Depressed Center Wheel, Wrench, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 37,200/-

GP 18DA

Cordless Die Grinder



Features

- Variable speed dial with auto mode
- Brake
- **Soft Start**
- Overload protection
- Kickback protection
- Anti-restart protection


	Specifications		
	Canacity	Collet Chuck	6mm
	Capacity	Max. Wheel	50mm
	Switch type	Slide (On Side)	
	Battery Voltage	18V	
	No Load Speed	7,000 - 29,000/min	
	Overall Length	464mm (with E	3SL36A18)
١	Weight	2.8kg (With BSL36A18)	
	Standard Accessories	2Batteries (BSL36A18), Charger (UC18YFSL), Collet Chuck, Wrenches, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 47,975/-

Variable Speed













AC 18DA Cordless Caulking Gun





I Anti-Drip Mechanism

The auto reverse feature prevents unwanted dripping of material when the trigger is released.

| Built-in LED Light

Illuminates the work space when used in dark er areas.

Runtime per Charge* (Using BSL36A18 battery)

Silicone Sealant φ5mm Nozzle Up to **165** Cartridges Urethane Sealant φ10mm Nozzle

Acrylic Adhesive φ8mm Nozzle Up to **165** Cartridges

Up to **180** Cartridges

Features

- 3,000N of dispensing force for high viscosity adhesives and sealants.
- Variable speed trigger and speed dial control allow for easy speed adjustment.
- Can be placed upside down with the cartridge inserted when not in use.
- Anti-drip mechanism prevents unwanted dripping of material when the trigger is released.
- LED light.

Specifications		
Voltage	18V	
Dispensing Speed	0 - 14mm/s	
Maximum Dispensing Force		3,000N
	300ml Holder	216mm
	400ml Holder	21011111
Stroke	600ml Holder	340mm
	800ml Holder (for APAC)	
Dimensions (L x W x H)		482 x 82 x 280mm
Weight 3.4kg (with BSL36B18 Battery* and 600ml Holder)		d 600ml Holder)
Standard Accessories	Battery (BSL1820M), Charger (UC18YSL3), 300ml and 400/600ml Holder Set, Protective Glasses, Hook, Battery Cover	





*Standard accessories may vary by country or area

MRP: ₹ 49,223/-

HIKOKI

RH 18DA

Cordless Caulking Gun



Features

- 3,000N of dispensing force for high viscosity adhesives
- Variable speed trigger and speed dial control allow for easy speed adjustment.
- Can be placed upside down with the cartridge inserted when not in use.
- Anti-drip mechanism prevents unwanted dripping of material when the trigger is released.
- LED light.

Specifications			
Voltage	18V	18V	
Tamanavatuus	I	30 - 400°C	
Temperature	II	30 - 550℃	
Air Volume	I	200L/min	
Air volume	II	300L/min	
Overall Length		217mm (without Battery)	
Weight	1.6kg	1.6kg (with BSL36A18)	
Standard Accessories	Charg	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Nozzle (Plane), Nozzle (Curved Surface), Nozzle (Round)	



*Standard accessories may vary by country or area



Cordless Planer

Li-ion

Features


- Rabbeting depth: 9mm
- Built-in stand to prevent the blade damaging workpieces.
- Remaining battery indicator lamp
- Optional adaptor to connect an optional dust bag or

Specifications		
Cutting width	82mm	
	Length	332mm
Dimensions	Width	166mm
	Height	160mm
Max. cutting depth	82mm	
Max. rebating depth	9.0mm	
No load speed	16,000 (min-1)	
Weight	3.3kg (with BSL36A18 battery)	
Standard accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 4 x 82mm reversible TCT blades.	

^{*}Standard accessories may vary by country or area

MRP: ₹ 48,126/-





Three Nozzle Attachments

Soft grip handle easy to hold soft arip handle easy to hold.

Remaining battery indicator_

Built-in stand to prevent contact between blade and material When the planer is lifted, the stand is extended from the rear base to preve the material being damaged by unexpected contact with the blade.

Attachable guide (included)
Using a guide assembly (included) enables easy rabbeting (shiplap-forming) and @ne @nish.







RB 18DC Cordless Blower

Li-ion



Features

- 3 air volume settings allow the user to control the volume with
- ease to suit the application
- Lock-on button for continuous use
- Low vibration ensures less fatigue and comfort for the user
- Can be used as a vacuum with an optional dust bag
- Compatible with 14.4 Lithium-ion Batteries

	Specifications
Voltage	18V
Air Volume Flow (without Nozzle)	0 - 3.5m³/min
Maximum Air Velocity (with Nozzle)	95m/s
Average Air Velocity (with Nozzle)	78m/s
Overall Length	490mm (with BSL36A18)
Weight	1.8kg (with BSL36A18)
Standard accessories*	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3),Nozzle

*Standard accessories may vary by country or area



MRP: ₹ 23,818/-

Easy Air Volume Control

The variable speed trigger and three air volume settings allow the user to control the volume with ease to suit the application .



Air Volume Changing Lever

- 3: High
- 2: Medium
- 1: Low







WR 18DF

18V Cordless Impact Wrench





Features

- Powerful with a max torque of 220Nm
- High capacity battery with battery level indicator
- LED light



	Specifications			
	Canasitu	Bolt	M10-M16	
	Capacity	High Tension Bolt	M8-M14	
	Square Drive	12.7mm		
	Tightening Torque	220Nm		
	Battery Voltage	18V		
64	No Load Speed	0-2,400/min		
	Impact Rate	0-3,200/min		
	Overall Length	177mm		
Ψ ψ	Weight	1.4kg		
STOP	Standard	2 Batteries (BSL1820M), Charger		
	Accessories*	(UC18YSL3), Battery Cover, Carrying Case		

MRP: ₹ 13,000

*Standard accessories may vary by country or area

WR 18DH

18V Cordless Impact Wrench





Features

- 345Nm Tightening Torque
- 600Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening Mode Selector
- IP56 Dust & Water Resistant
- **Bright LED Light**
- Compact, Light weight & Well balanced







	vveign	
P	Standa	
	Accesso	

Specifications		
Capacity	Ordinary Bolt	M10-M20
	High Tension Bolt	M10-M16
Square Drive	12.7mm	
Tightening Torque	345Nm	
Battery Voltage		18V
	Mode 4	0 - 2,800 / min
No-load	Mode 3	0 - 2,400 / min
rotation speed	Mode 2	0 - 1,800 / min
	Mode 1	0 - 1,200 / min
Full Load Impact	Rate	0-3,200/min
Overall Length	144mm	
Weight	eight 1.3kg (Without battery) 2.3kg (BSL36B18X)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger(UC18YFSL), Battery Cover, Carrying case	

*Standard accessories may vary by country or area

MRP: ₹ 43,365/-

WR 18DSDL **18V Cordless** Impact Wrench







Features

- Save mode or Power mode for better control based on the application
- 12.7mm (1/2") Square bit shank
- Tightening torque 255Nm

Specifications		
Canacity	Bolt	M10-M18
Capacity	High Tension Bolt	M8-M14
Square Drive	12.7mm	
Tightening	Power Mode	255Nm
Torque	Save Mode	140Nm
Battery Voltage		18V
No Lood Coood	Power Mode	0-2,600/min
No Load Speed	Save Mode	0-2,000/min
Full Load Impact	Rate	0-3,200/min
Overall Length	173mm	
Weight	1.5kg (with BSL1830C)- 2.1kg (with BSL1850)	
Standard Accessories*	2 Batteries (BSL1830 or BSL1850), Charger (UC18YFSL / UC18YSL3 / UC18YRSL), Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 34,000/-













CR 18DBL

Cordless **Reciprocating Saw**



Features

- Brushless motor control allows max speed (SPM) adjustment With auto mode, electricity consumption and noise can be suppressed by lowering the number of maximum strokes during no-load motor operation
- Tool-less blade change
- Tool-less shoe adjustment
- Easy to grip and handle
- Large pivoting hook conveniently allows for hanging the tool on a φ48mm pipe



Specifications			
Battery Voltage	18V		
	Mild Steel Pipe	130mm	
Canacity	PVC Pipe	130mm	
Capacity	Wood	120mm	
	Mild Steel Plate	19mm	
No Load Speed	0 - 2,500/min		
Length of Stroke	32mm		
Overall Length	435mm		
Weight	3.4kg*		
Standard Accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), Blade for Wood, Hex. Bar Wrench, Battery Cover, Carrying Case		

MRP: ₹ 52,581/-

*Standard accessories may vary by country or area

CB 18DBL

Cordless Band Saw

Li-ion **BRUSHLESS**

Features

- Auto Mode function
- Soft start function
- High speed cutting with a cleaner finish





Specifications			
Battery Voltage	18V		
Capacity	Round pipe (external diameter)	83mm	
_ ' '	Square pipe (WxH)	80x80mm	
	Standard mode	80 - 195 (m/min)	
Cutting Speed	Auto mode (without load)	120 - 195 (m/min)	
	Length	413mm	
Dimensions	Width	173mm	
	Height	266mm	
Blade size	900 x 12.5 x 0.5m	ım	
Length of Stroke	32mm		
Overall Length	435mm		
Weight	3.6kg (with BSL3	6A18 battery)	
Standard accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 1 x 18TPI bi-metal blade, side handle and wrench. 3.6kg (with BSL36A18 battery)		

*Standard accessories may vary by country or area

MRP: ₹ 52,734/-







Variable Speed

UB 18DC Cordless Work Light

Li-ion




Features

- Brightness adjustable from 700lm to 4,000lm
- IP65 dust and water resistant
- Angle adjustable
- Hanging hook

Specifications			
Battery Voltage	18V		
LED (White)	60pcs		
USB Port	5V, 1A		
Brightness Adjustment Range	700 - 4,000lm		
Weight	1.9kg (Without Battery)		
Dimensions (L x W x H)	186 x 155 x 276mm		
Standard Accessories*	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3),		

^{*}Standard accessories may vary by country or area







M 18DYA

Cordless Cut-Out Tool

Li-ion **BRUSHLESS**

Features

- Lightweight and ergonomic design with a small gripSoft start function circumference at 169mm
- LED light turns on when the tool is activated

Specifications		
Collet Chuck Capacity	3.18mm (1/8") or 6.35mm (1/4")	
Battery Voltage	18V	
No Load Speed	28,000/min	
Dimensions (L x W x H)	259x118x82mm (with BSL1820M)	
Weight	1.7kg (with BSL36A18)*	
Standard Accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 2 Collet Chucks, 2 Bits, Wrench, Hook, Battery Cover, Carrying Case	

^{*}Standard accessories may vary by country or area

MRP: ₹ 45,897/-

Most Compact and

HIKOKI





Dust Extracting

Type

HiKOKI

R 18DSL

Cordless Cleaner

Li-ion

Features

- Capable of approx. 29 minutes of continuous use by an optional 3.0Ah-capacity battery
- Powerful dust collection
- High capacity translucent dust case
- Includes crevice nozzle, brush nozzle and squeegee nozzle

Specifications		
Battery Voltage	18V	
Dustcase Capacity	670mL	
Overall Length	430mm	
Weight	1.5kg	
Standard Accessories*	2 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Brush Nozzle, Crevice Nozzle, Squeegee Nozzle	

^{*}Standard accessories may vary by country or area





UL 18DA

Cordless Cooler & Warmer Box

Li-ion

Features

- 3 stage temperature settings
- Power source options: battery, AC power, or automotive power supplies
- Battery charging function
- Shoulder belt and casters for easy mobility



Specifications			
Power Supply	Slide battery (14.4V, 18V, MULTI VOLT), Household power supply, 12VDC		
Performance	Cold (Min. 5)	High: Ambient -25, Mid: Ambient -20, Low: Ambient -10	
refrormance	Hot (Max. 55)	High: Ambient +45, Mid: Ambient +40, Low: Ambient +25	
Continuous Operating Time	High	Approx. 2h 30min	
(with one BSL36A18 battery)	Mid	Approx. 3h 10min	
	Low	Approx. 5h	
Capacity	25L		
Cooling System	Electronic cooling system		
Number of Batteries that Can Be Installed	2		
Charging Time (at 20, with one BSL36A18 battery)	3h 20min		
Operating Temperature Range	0-40		
External Dimensions (L x W x H)	340 x 560 x 445 mm (13-13/32" x 22-1/16" x 17-17/32")		
Weight	8.0 kg (17.6lbs.) without battery		
Standard Accessories	AC Adapter, DC Cord, Shoulder Belt, Handle		

*Standard accessories may vary by country or area

MRP: ₹ 35,400/-





MULTI VOLT battery system AC POWER. DC FREDOM.


A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MULTI VOLT 36V tools, without the hassle of cords. The MULTI VOLT batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.



COMPATIBILITY

- One Battery Two Voltages (36V / 18V)
- Backward Compatible with HiKOKI 18V tools

The MV battery platform is compatible with both 36V and 18V tools, and it automatically changes between the two voltages according to the tool used. Having to use different batteries and changes for different tools can be very cumbersome and inconvenient. MV users need only one battery to use both 18V and 36V tools, which saves all the hassle.



OUTSTANDING POWER

36V Nominal Voltage. Up to 41V after Charging.

The MULTI VOLT 36V battery platform boasts a high power output, with the maximum voltage reaching as high as 41V right after charging. The MULTI VOLT batteries deliver the power to increase productivity and efficiency.

ALL DAY RUNTIME

MULTI VOLT gives you the choice to operate MULTI VOLT tools either cordless with a MULTI VOLT 36V battery or corded with the MULTIVOLT AC Adapter. When a power outlet is available, you can choose to use the AC adapter for unlimited runtime.





BSL36A18 / BSL36B18 MULTI VOLT Battery

DSESONIO / DSESODIO MOEIT VOET BULLETY			
Model	BSL36A18	BSL36B18	
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah (dual voltage)	36V - 4.0Ah / 18V - 8.0Ah (dual voltage)	
Cooling System	Yes		
Dimensions (L x H x W)	116 x 69 x 76mm	134 x 75 x 83mm	
Charging Time	Approx. 32min. (When using the UC18YSL3 charger)	Approx. 52min. (When using the UC18YSL3 charger)	
Compatible	18V	Existing 18V slide-type tools	
Products	36V	MULTI VOLT 36V tools	
Compatible Charger	All chargers compatible with 14.4-36V slide-type Lithium-ion batteries		

GREAT PERFORMANCE IN COLD WEATHER

The MULTI VOLT batteries are guaranteed to work at a temperature as low as -10° C, providing you with peace of mind when you work in cold weather.

Cordless

HiKOKI

CORDLESS DRIVER DRILLS

DS 36DA

Li-ion

MULTI VOLT 36V Cordless Driver Drill





Features

RFC

• Feedback speed control for more stable handling

- Robust aluminium gear case
- 22-stage adjustable clutch

BRUSHLESS

- Large double molded clutch dial is easy to grip and read
- IP56 dust & water resistance

Specifications			
Drill Chuck	1.5-13mm Keyless		
	Mild Steel	16mm	
Canacity	Soft Wood	102mm	
Capacity	Wood Screw	12x100mm	
	Machine Screw	6mm	
Battery Voltage	36V		
No Load Speed	High	0–2,100/min	
No Load Speed	Low	0–500/min	
Max Torque Hard	138Nm		
Max Torque Soft	64Nm		
Torque Setting	2–8Nm		
Overall Length	204mm		
Weight	2.7kg - 3.0kg		
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Driver Bit, Battery Cover, Carrying Case		

*Standard accessories may vary by country or area

MRP: ₹ 55,500/-



LOWHIGH







Variable Speed







Chargers/ Batteries

Drilling

CORDLESS DRIVER DRILLS

DS 36DC

MULTI VOLT 36V Cordless Driver Drill



Features

- Powerful enough to drill 36mm holes
- Continuously drives thick and long screws fast
- 190mm compact head
- Side handle is easy to use and easily adjustable at 11 different positions

Specifications				
Drill Chuck	1.5-13mm Keyless			
Capacity	Mild Steel	20mm		
	Soft Wood	118mm		
	Wood Screw	16x100mm		
	Machine Screw	6mm		
Battery Voltage	36V			
No Load Speed	High	0–2,200/min		
	Low	0–550/min		
Max Torque Hard	155Nm			
Max Torque Soft	100Nm			
Overall Length	190mm			
Weight	2.8kg (with BSL36A18)			
	3.1kg (with BSL36B18)			
Standard Accessories*	(UC18YSL3), Side Handle, Hook, Driver			
	Bit, Battery Cover, Carrying Case			

MRP: ₹ 48,000/-



Higher Drilling Capacity and Greater Versatility with **MULTI VOLT Battery**















*Standard accessories may vary by country or area









HiKOKI

Higher Drilling Capacity and Greater Versatility with

MULTI VOLT Battery

CORDLESS IMPACT DRIVER DRILLS

DV 36DA

MULTI VOLT 36V Cordless Impact Driver Drill







Feedback speed control for more stable handling

• Robust aluminium gear case

• 22-stage adjustable clutch

• Large double-molded clutch dial is easy to grip and read

Specifications				
Drill Chuck	1.5–13mm Keyless			
Capacity	Brick	20mm		
	Mild Steel	16mm		
	Soft Wood	102mm		
	Wood Screw	12x100mm		
	Machine Screw	6mm		
Battery Voltage	36V			
No Load Speed	High	0–2,100/min		
	Low	0–500/min		
Impact Rate	High	0–31,500/min		
	Low	0–7,500/min		
Max Torque Hard	138Nm			
Max Torque Soft	64Nm			
Torque Setting	2–8Nm			
Overall Length	204mm			
Weight	2.7kg-3.0kg			
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Driver Bit, Battery Cover, Carrying Case			

^{*}Standard accessories may vary by country or area

Brake

MRP: ₹ 60,000/-



Variable Speed









LOWHIGH



CORDLESS IMPACT DRIVER

WH 36DB
MULTI VOLT 36V
Cordless Impact Driver



TRIPLE HAMMER



Li-ion BRUSHLESS

Features

- Triple Hammer mechanism has three strikers making three impacts per rotation instead of the usual two, reducing vibration and vastly improving user comfort
- 4-step tightening mode selector for a variety of jobs from delicate to heavy duty work
- Newly designed airflow system for optimal cooling efficiency
- Well-balanced weight distribution for better work efficiency
- IP56 dust & water resistance

Specifications				
Capacity	Bolt	5-18mm		
	High Tension Bolt	5-14mm		
	Machine Screw	4-10mm		
	Self Drilling Screw	3.5-6mm		
Drive	6.35mm Hex Bit Shank			
Tightening Torque	210Nm			
Battery Voltage	36V			
	Power Mode	0-2,900/min		
	Normal Mode	0-2,900/min		
No Load Speed	Soft Mode	0-900/min		
	Self Drilling Screw Mode	0-2,900/min		
Impact Rate	Power Mode	0-4,100/min		
	Normal Mode	0-4,100/min		
	Soft Mode	0-2,000/min		
	Self Drilling Screw Mode	0-2,200/min		
Overall Length	127mm			
Weight	1.6kg-1.9kg			
Standard Accessories*	2Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Carrying Case			



*Standard accessories may vary by country or area

MRP: ₹ 52,500/-













CORDLESS IMPACT DRIVER

WH 36DC MULTI VOLT 36V Cordless Impact Driver



Li-ion BRUSHLESS

Features

- Compact head and lightweight design
- 5 tightening modes for various applications
- Triple LED lights for superior visibility
- IP56 dust & water resistance

	Specifications		
Capacity	Small Screw	4 - 10mm	
	Ordinary Bolt	5-18mm	
	High Tension Bolt	5-14mm	
	Self Drilling Screw	ø3.5-ø6mm	
Drive	6.35mm Hex Bit Shank		
Max. Tightening Torque	215Nm		
Battery Voltage	36V		
No Load Speed	Soft Mode	0-900/min	
	Power Mode	0-3,400/min	
	Bolt Mode	0-2,900/min	
No Load Speed	Bolt Single Mode	0-2,900/min	
	Self Drilling Screw Mode	0-3,700/min	
	Soft Mode	0-2,000/min	
Impact Rate	Power Mode	0-4,100/min	
	Bolt Mode	0-4,100/min	
	Bolt Single Mode	0-4,100/min	
	Self Drilling Screw Mode	0-2,200/min	
Overall Length	114mm		
Weight	1.6kg		
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Carrying Case		



















Reversible

CORDLESS IMPACT WRENCH

WR 36DF MULTI VOLT 36V Cordless Impact Wrench





li KOKI

Li-ion **BRUSHLESS**

Features


- 1,900Nm Tightening Torque
- 2,400Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening mode selector
- IP56 Dust and Water Resistant*
- Powered by 36V High Performance brushless motor
- **Bright LED light**

Specifications				
Capacity	Bolt	M12-M36		
	High Tension Bolt	M10-M27		
Square Drive	19mm			
Tightening Torque	1,900Nm			
Nut Busting Torque	2,400Nm			
Battery Voltage	36V			
	Mode 4	0–1,500/min		
No Load Spood	Mode 3	0–1,200/min		
No Load Speed	Mode 2	0-900/min		
	Mode 1	0–600/min		
Full leave at Data	Mode 4	0–2,600/min		
	Mode 3	0–2,200/min		
Full Impact Rate	Mode 2	0–1,900/min		
	Mode 1	0–1,600/min		
Overall Length	221mm			
Weight	3.9kg (BSL36A18)			
Standard Accessories*	Charger (UC 18YSL3), Battery (BSL36A18) - 2 Nos, stackable case, battery cover.			















^{*}Standard accessories may vary by country or area

^{*} Above image is for illustration purpose only

HiKOKI

CORDLESS IMPACT WRENCH

WR 36DG

MULTI VOLT 36V Cordless Impact Wrench






Li-ion **BRUSHLESS**

Features

- 1,400Nm Tightening Torque
- 2,000Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening mode selector
- IP56 Dust and Water Resistant*
- Powered by 36V High Performance brushless motor
- Bright LED light

	Specifications	
Capacity	Bolt	M12-M33
	High Tension Bolt	M10-M24
Square Drive	12.7mm	
Tightening Torque	1,400Nm	
Nut Busting Torque	2,000Nm	
Battery Voltage	36V	
	Mode 4	0–1,500/min
No Load Spood	Mode 3	0–1,200/min
No Load Speed	Mode 2	0-900/min
	Mode 1	0–600/min
	Mode 4	0-2,500/min
Full Impact Data	Mode 3	0-2,200/min
Full Impact Rate	Mode 2	0–1,900/min
	Mode 1	0–1,600/min
Overall Length	221mm	
Weight	3.9kg (BSL36A18)	
Standard Accessories*	Charger (UC 18YSL3), Battery (BSL36A18) - 2 Nos, stackable case, battery cover.	



^{*} Above image is for illustration purpose only.

Variable Speed



Brake



















Demolition

nalimatic

38

CORDLESS DISC GRINDER



G 3610DA



Features

- Faster grinding & cutting speed
- 146mm grip circumference
- Auto Mode adjusts the speed automatically between high and low speeds depending on the load
- Electronic brake stops the wheel in less than 2 seconds
- Kickback protection system
- Anti-restart protection
- Variable speed control

Specifications		
Canacity	Wheel Dia.	100mm
Capacity	Hole Dia.	16mm
Spindle Thread	M10x1.5	
Voltage	36V	
No Load Speed	Transmission Mode	3,000-9,500/min
	Auto Mode	5,500/min
Overall Length	358mm	
Weight	2.6kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Depressed Center Wheel (100mm dia.), Side Handle, Wrench, 2 Battery Covers, Carrying Case	

*Standard accessories may vary by country or area







MRP: ₹ 48,000/-



Brake



CORDLESS DISC GRINDER

G 3610DVEMULTI VOLT 36V
Cordless Disc Grinder



Features

- 1,500W max output
- Highly durable ball bearings
- Dust and water resistant switch
- After the motor has stopped due to overloading, it continues to run if the load decreases within 1.5 seconds
- Small grip circumference
- Variable speed control with auto mode
- Dual LEDs illuminate both sides of the wheel
- 3 position side handle
- Easy to maintain mesh dust filter
- Kickback protection
- Drop shut-off function
- Restart protection

Specifications			
Battery Voltage	36V		
	Wheel Dia.	100mm	
Capacity	Hole Dia.	16mm	
	Thickness.	6mm	
	AUTO Mode	5,500/min	
No Load Speed	Transmission Mode	3,200 - 10,000/min	
Spindle Thread	M10 x 1.5		
Overall Length	375mm*	375mm*	
Weight	2.8kg (with BSL36A18) 3.0kg (with BSL36B18)		
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Wheel Guard, Depressed Center Wheel, Wrench, 2 Battery Covers, Carrying Case		

*Standard accessories may vary by country or area

MRP: ₹ 48,000/-

Spindle Lock









Variable Speed





CORDLESS DISC GRINDER



G 3618DA

MULTI VOLT 36V Cordless Disc Grinder with Slide Switch



Features

- High performance with brushless motor
- Trigger switch with ON/OFF lock
- Brake, kickback, anti-restart & soft start function
- Soft grip & anti-vibration side handle
- Tool-less wheel guard

Specifications			
Canacity	Wheel Dia.	180mm	
Capacity	Hole Dia.	22.23mm	
Spindle Thread	M14x2		
Voltage	36V		
No Load Speed	Normal Mode	5,300/min	
	Auto Mode	3,200/min	
Overall Length	531mm		
Weight	4.7kg (Without Battery)		
	2 Batteries (BSL36A18), Charger		
Accessories	(UC18YSL3), Depressed Center Wheel		
Accessories	(180mm dia.), Side Handle, Wrench, 2		
	Battery Covers, Carrying Case		









*Standard accessories may vary by country or area

Variable Speed

MRP: ₹ 35,600/-(Bare Tool)













HIKOKI

CORDLESS RECIPROCATING SAW

Higher Drilling Capacity

and Greater Versatility with

MULTI VOLT Battery

CR 36DA

MULTI VOLT 36V Reciprocating Saw

Li-ion **BRUSHLESS** UVP



Features

- Orbital Mode for maximum wood cutting approx. 194% faster cutting speed
- HiKOKI Twin-counterweight System for signicant vibration reduction
- Four-mode speed control for a variety of applications
- Tool-less blade change
- Tool-less shoe adjustment
- Durable cylindrical housing
- Large pivoting hook

Specifications		
Battery Voltage	36V	
	Mild Steel Pipe	130mm
Capacity	Vinyl Chloride Pipe.	130mm
	Wood	300mm
	Mild Steel Plate	19mm
No Load Speed	0 - 3,000/min	
Length of Stroke	32mm	
Overall Length	457mm	
Weight	4.5kg with BSL36A18 battery	
Standard	2 Batteries BSL36A18, Charger (UC18YSL3),	
accessories*	Blade, Battery Cover, Carrying Case	

MRP: ₹ 72,017/-











Variable Speed



CORDLESS BRUSHLESS CHAIN SAW

Higher Drilling Capacity and Greater Versatility with **MULTI VOLT Battery**

CS 3635DB MULTI VOLT 36V Cordless Chain Saw

Li-ion **BRUSHLESS**

Features

Powerful cutting performance

Highly durable and low vibration thanks to the brushless motor with a direct drive system

Toolless chain change and adjustment



Specifications		
Battery Voltage	36V	
Guide Bar Length	350mm	
Chain Speed	14.9m/s	
Type of Guide Bar	Sprocket Nose	
Chain Pitch	9.5mm	
Chain Gauge	1.1mm	
Overall Length	760mm	
Oil Tank Capacity	100mL	
Vibration Total Values (triax vector sum)*	Vibration Emission Value ah -2.4 m/s ² Uncertainty K - 1.5m/s ²	
Weight* (with Battery, Saw Chain, Guide Bar)	4.6kg (with BSL36A18)	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Wheel Guard, Depressed Center Wheel, Wrench, 2 Battery Covers, Carrying Case	



*Standard accessories may vary by country or area

Control

MRP: ₹ 48,000/-





Brake



CORDLESS HEDGE TRIMMER

CH 3656DA MULTI VOLT 36V

Cordless Hedge Trimmer



Li-ion

Features

- Approx. 62.5 min* runtime per charge with MULTI VOLT battery
- Triple-edged and double-sided blade cuts well
- Four speed settings
- Ergonomic shaped sub handle and soft-grip main handle for comfortable hedge cutting in any working position
- Durable aluminum bottom cover
- With a handle shape with good operability that allows you to easily select your working posture, It is ideal for cutting the top and sides of hedges. In addition, we adopted a soft grip that is easy to hold and hard to slip.

Specifications			
Battery Voltage	36V		
Blade	Length.	620mm	
	Effective.	560mm	
Blade Pitch	35mm		
Overall Length	1,088mm	1,088mm	
Weight	4.1kg (with BSL36A18)		
Standard	2 Batteries (BSL36A18), Charger		
accessories*	(UC18YSL3), Blade Case, Battery Cover		
*Standard accessories may vary by country or area			

MRP: ₹ 51,520/-



Drilling

CORDLESS GRASS TRIMMER



CG 36DB MULTI VOLT 36V Cordless Grass Trimmer

Li-ion

Features

- Well balanced and easy to operate
- Lightweight design
- 3 stage speed control



Specifications		
Battery Voltage	36V	
	Power	6,500/min
No Load Speed	Nomal.	5,500/min
	Eco	4,000/min
Spindle Thread	310mm	
Overall Length	1,803mm	
Weight	4.5kg (with BSL36A18)	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Nylon Head, Guard, Hex. Bar Wrench (4mm), Box Wrench (Hex. Socket 17/19) Protective Glasses, Shoulder Belt	

*Standard accessories may vary by country or area

MRP: ₹ 62,515/-

ŞŢOP



Brake





CORDLESS BLOWER



RB 36DA

MULTI VOLT 36V

Cordless Blower





Features

- Approx. 9.5min* runtime per charge (when in mode 4)
- 4-mode power settings plus turbo mode
- High-efficiency and durable brushless motor
- The value is for reference purposes. It may vary according to the operating conditions.
- Lightweight and compact design

Specifications		
Battery Voltage	36V	
Air Volume	680m3/h (800m3/h when in turbo mode)	
Air Velocity	45m/s (53m/s when in turbo mode)	
Overall Length	940mm	
Weight*	3.5kg with BSL36A18	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Nozzle, Battery Cover	



MRP: ₹ 62,515/-

^{*}Standard accessories may vary by country or area

ous Pneu

UC 3SFL

3.6V Charger

Features

Large charge indicator lamp



Specifications		
Charging Voltage	age 3.6V	
D-++	Туре	Cassette
Battery	Assortment	Lithium-ion
Fan cooling	No	

UC 7SL

7.2V Charger

Li-ion

Features

- Large charge indicator lamp with 4 color LED status lights
- Battery capacity lamp (4 stages)
- Low-temperature charge (-10° C and above)



	Specifications	
Charging Voltage	7.2V	
Battery	Туре	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

UC 10SL2

10.8V Charger

Li-ion

Features

 For BCL1015 / BCL10155 / BCL1030C / BCL1030 / BCL1030M Lithium-ion batteries



Specifications		
Charging Voltage	10.8V	
D-tt	Туре	Cassette
Battery	Assortment	Lithium-ion
Fan cooling	No	

UC 12SL

10.8 - 12V Peak Charger

Li-ion

Features

Compatible with engine generators

Low-temperature charge (From -10°C)



Specifications		
Charging Voltage 10.8 - 12V Peak		
Datte	Туре	Slide
Battery	Assortment	Lithium-ion
Fan cooling	Yes	

The actual charging time can vary depending on the surrounding temperature & battery condition

HIKOKI

UC 18YFSL 14.4V / 18V Charger

Li-ion

Features

Rapid charging



	Specifications	
Charging Voltage	14.4V and 18V	
Battery	Туре	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

UC 18YG UC 18YGL2

7.2V - 18V Chargers

Li-ion



Specifications		
Charging Voltage	ging Voltage 7 .2V - 18V	
Datta	Туре	Cassette
Battery	Assortment	Lithium-ion
Fan cooling	No	

UC 18YRL

7.2V - 18V Charger

Li-ion

Features

Rapid charging



Specifications		
Charging Voltage 7 .2V - 18V		
Datta	Туре	Cassette
Battery	Assortment	Lithium-ion
Fan cooling	Yes	

UC 18YSL3


14.4V / 18V Charger

Li-ion

Features

 Compatible with engine generators Low-temperature charge (From -10°C)

- High visibility large charge indicator lamp & full-color LED lights
- USB port (5V, 2A)



The actual charging time can vary depending on the surrounding temperature & battery condition

Demolition

BSL 1850MA 18V Lithium-ion Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers



Specifications		
Voltage & Capacity 18V - 5.0Ah		
Cooling System	Yes	
Dimensions (L x H x W)	116 x 69 x 76mm	
Weight	650g	
Compatible Products	All existing 18V slide-type tools	
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries	

BSL 1840M 18V Lithium-ion

18V Lithium-ion Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers

411			
	4.0	HiKOKI	Livian 18v

Specifications		
Voltage & Capacity 18V - 4.0Ah		
Cooling System Yes		
Dimensions (L x H x W)	134 x 83 x 54mm	
Weight	600g	
Compatible Products	All existing 18V slide-type tools	
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries	

BSL 1820M 18V Lithium-ion

Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers



Specifications		
Voltage & Capacity	18V - 2.0Ah	
Cooling System	Yes	
Dimensions (L x H x W)	116 x 76 x 49mm	
Weight	380g	
Compatible Products	All existing 18V slide-type tools	
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries	

BSL 1240M

10.8 - 12V Peak Lithiumion Slide Battery



Specifications		
Voltage	10.8 - 12V Peak	
Capacity	4.0Ah	
Dimensions (L x H x W)	91 x 45 x 74mm	
Charging Time	Approx. 60 min (when using the UC12SL)	
Compatible Products	UC12SL	

12V PEAK

Li-ion

The actual charging time can vary depending on the surrounding temperature & battery condition

Pneumai

BSL 1220M

10.8 - 12V Peak Lithiumion Slide Battery





Specifications		
Voltage	10.8 - 12V Peak	
Capacity	2.0Ah	
Dimensions (L x H x W)	91 x 45 x 74mm	
Charging Time	Approx. 60 min (when using the UC12SL)	
Compatible Products	UC12SL	

BSL 36A18

36V / 18V MULTI VOLT Lithium-ion Slide Battery



Features

- 1,080W high power output
- Automatic voltage change between 36V 2.5Ah and 18V 5.0Ah depending on the tool's voltage
- Remaining battery indicator
- Full compatibility with the existing 18V slide range and 14.4V-36V slide battery chargers

Specifications		
36V - 2.5Ah / 18V - 5.0Ah		
Yes		
116 x 69 x 76mm		
Approx. 32 min (when using the UC18YSL3)		
All existing 18V slide-type tools		
MULTI VOLT 36V tools		
All chargers for 14.4V - 36V slide- type Lithium-ion batteries		

The actual charging time can vary depending on the surrounding temperature & battery condition

HIKOKI HIKOKI DRILLING DRILLS

10 mm TOOL KIT









Drill Chuck	1.5-10mm		
	Metal	10mm	
Capacity	Masonry	10mm	
	Wood	20mm	
Power Input	550W		
No Load Speed	0-3,000/min		
Dimension(L*W*H)	(290x66x100)mm		
Full Load Impact Rate	0-48,000/min		
Package	ВМС		
Weight	1.7kg		
28 Pieces Accessories kit			

Specifications

MRP: ₹ 6,240/-

13 mm TOOL KIT











	•		
Drill Chuck	1.5-13mm		
	Concrete	13mm	
Capacity	Steel	13mm	
	Wood	20mm	
Power Input	550W	550W	
No Load Speed	0-2,900/min		
Dimension(L*W*H)	(325x260x790)mm		
Full Load Impact Rate	29,000/min		
Overall Length	270mm		
Package	ВМС		
Weight	1.7kg		
28 Pieces Accessories kit	t		

Specifications

MRP: ₹ 6,800/-

D 10VSTA 10mm Drill



Features

- Soft grip handle
- Variable & reversible mode









MRP:	₹	3,060/-

D 13VH 13mm Drill



Features

- Chuck offset 23.5mm
- Aluminium Gear Cover for durability
- Soft grip handle
- Variable speed by trigger and dial

	Specifications	
Chuck Capacity	1.5-10mm	
Cit	Steel	10mm
Capacity	Wood	20mm
Power Input	450W	
No Load Speed	0-3,000/min	
Overall Length	245mm	
Weight	1.3kg	
Standard Accessories	Chuck Wrench	

Specifications

13mm

Chuck Capacity	1.5-13mm Keyed / keyless	
Capacity	Steel	13mr
	Wood	40mr
Power Input	690W	
No Load Speed	Hi: 0-3,000/min	Lo: 0-1,000
Overall Length	333mm	

Y	Ψ	•
LOW	HIGH	

Reversible

Power Input 690W		
No Load Speed Hi: 0-3,000/min Lo: 0-1	Hi: 0-3,000/min Lo: 0-1,000/min	
Overall Length 333mm	333mm	
Weight 1.9kg		
	Chuck Wrench, Side Handle, Depth	
Accessories Stopper		

MRP: ₹ 8,840/-







Variable Speed





DV 10VST

10mm Impact Drill

374185 <u>W</u>

Features

- Soft grip for easier handling
- Variable speed trigger to suit multiple drilling application
- Forward & reversible for convenience



MRP: ₹ 3,630/-

DV 13VSS

13mm Impact Drill



Features

- Cylindrical housing for durability
- Offset of chuck: 28mm
- Variable speed by dial & trigger



MRP: ₹ 4,950/-

DV 16V

16mm Impact Drill







Specifications			
Drill Chuck	1.5-13mm		
Capacity	Concrete	16mm	
	Steel	13mm	
Power Input	590W		
No Load Speed	0-2,900/min		
Full Load Impact Rate	34,500/min		
Overall Length	269mm		
Weight	1.5kg		
Standard Accessories	Side Handle, Depth Gauge, Carrying Case, Chuck Wrench		

MRP: ₹ 7,720/-

VTP 18

18mm Impact Drill



Features

- Metal gear housing
- With 2 speed



1	⊗ ,	






Voltage	220V	
Drill Chuck	1.5 - 13mm	
Speed change	1	2
No-load speed	1,050/min	1,800/min
Capacity Steel	13mm	8mm
Capacity Concrete	18mm	10mm
Power Input	640W	
Full Load Impact Rate	17,800-28,600/min	
Overall Length	340mm	
Weight	2.3Kg	

Specifications

MRP: ₹ 8,950/-











DH 22PBS

22mm Rotary Hammer





Features

- 2-mode action: Rotation & Hammering mode and Rotation only mode
- SDS Plus shank
- Variable speed trigger
- Drilling / Hammer Drilling











Specifications		
	Concrete	22mm
Capacity	Mild Steel	13mm
	Wood	25mm
Power Input	820W	
No load RPM	0-1100/min	
Full Load Impact rate	4400/min	
Overall Length	385mm	
Weight	2.8kg	
Weight	2.8kg	

Specifications

MRP: ₹ 14,000/-

DH 24PG2

24mm Rotary Hammer



Features



















Accessories

	Specifications	
C	Concrete	24mm
	Mild Steel	13mm
Capacity	Wood	32mm
	Core Bit	50mm
Power Input	730W	
Bit Shank	SDS-plus	
No Load Speed	0-1,050/min	
Full Load Impact rate	0-3,950/min	
Overall Length	349mm	
Weight	2.8kg	
Standard	Side Handle, Depth Gauge,	
Accessories	Carrying Case	

MRP: ₹ 15,450/-

DH 26PB2

26mm Rotary Hammer

and Rotation only mode

Labyrinth Ventilation windows

Compact design



2-mode action: Rotation and Hammering mode















Features 2-mode action: Rotation and Hammering

- Highest drilling speed
- Labyrinth ventilation windows

mode and Rotation only mode



	SHallk
\	
	I

Capacity	Concrete	26mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	830W	
Bit Shank	SDS-plus	
No Load Speed	0-1,100/min	
Full Load Impact rate	0-4,300/min	
Overall Length	349mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

Specifications

MRP: ₹ 16,160/-























HiKOKI

26mm

13mm

32mm

25-50mm

JVP

UVP

28_{mm}

13mm

32mm

50mm

Specifications

Concrete

Wood

830W

Core bit

SDS-plus

0-1,100min

0-4,300min

Carrying Case

Side Handle, Depth Gauge,

349mm

2.8kg

Mild Steel

DH 26PC2

26mm Rotary Hammer















rate

Weight

Standard

Capacity

Power Input Bit Shank

No-Load Speed

Full Load Impact

Overall Length

Features

- 3-mode action: Rotation and Hammering mode, Rotation only mode and Hammering mode only.
- Labyrinth ventilation windows
- Compact body

DH 28PBY2

28mm Rotary Hammer



Features

- 2-mode action: Rotation and Hammering mode and Rotation only mode.
- Lowest vibration in its class through UVP system using dynamic damper
- Labyrinth ventilation windows
- Large mode change lever





\	1
/	

Specifications			
Carratitus	Concrete	28mm	
	Mild Steel	13mm	
Capacity	Wood	32mm	
	Core Bit	50mm	
Power Input	850W		
Bit Shank	SDS-plus		
No Load Speed	0-1,100/min		
Full Load Impact rate	0-4,300/min		
Overall Length	360mm		
Weight	3.0kg		
Standard Accessories	Side Handle, Depth Gauge, Carrying Case		

Specifications

Concrete

Mild Steel

Wood

850W

Core Bit

SDS-plus

360mm

3.0kg

0-1,100/min

0-4,300/min

MRP: ₹ 17,280/-

DH 28PCY2

28mm Rotary Hammer



Features

- 3-mode action Rotation and Hammering mode, Rotation only mode and Hammering mode only.
- Lowest vibration in its class through UVP system using dynamic damper
- One push bit mounting



Capacity

Power Input

No Load Speed

Full Load Impact

Overall Length

Bit Shank

rate

Weight

Standard





































Side Handle, Depth Gauge,







DH 40MC

40mm Rotary Hammer





Features

- Large change lever
- Multiple bit angle setting.

Specifications			
Capacity	Drill Bit	40mm	
	Core Bit	105mm	
Power Input	1,100W		
Bit Shank	SDS max		
No Load Speed	620/min		
Full Load Impact rate	2,800/min		
Overall Length	448mm		
Weight	7.1kg		
Standard Accessories	Side Handle, Stopper, Hammer Grease A (30g), Carrying Case		

MRP: ₹ 43,430/-

ISI

ISI

SDS max Shank

DH 45MA

45mm Rotary Hammer



Features

- Powerful 1,400W motor delivers the power needed for heavy-duty applications
- Large change lever for easy and smooth mode switching
- Easy to hold large trigger switch

Specifications		
Capacity	Drill bit	45mm
	Core bit	125mm
Power Input	1,400W	
Bit Shank	SDS max	
No Load Speed	380/min	
Full Load Impact rate	2,900/min	
Overall Length	535mm	
Weight	9.4kg	
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case	

MRP: ₹ 60,080/-

DH 45ME

45mm Rotary Hammer



Features

DESIGN AWARD 2015

- Maintains the speed and performance even at voltage
- Power lamp lights up when the plug is inserted into
- Large mode change lever
- Large trigger switch



LVH



MRP: ₹ 72,450/-









Shock-Absorbing Handle Type



SDS max Shank

Accessories



2-speed Gear

Carrying Case

DH 52ME

52mm Rotary Hammer





Maintains the speed and performance even at voltage drop

- Power lamp lights up when the plug is inserted into an outlet
- Large mode change lever
- Large trigger switch

Specifications		
Capacity	Drill bit	52mm
	Core bit	160mm
Power Input	1,500W	
Bit Shank	SDS max	
No Load Speed	220V: 110 - 2	80/min
Full Load Impact rate	220V: 1,000 -	2,400/min
Overall Length	585mm	
Weight	11kg	
Standard Accessories	Side Handle, Rotary Hamn	
	A, Carrying C	ase

MRP: ₹ 94,990/-

Double Insulation



Electronic Constant Speed Control



Slip Clutch



Shock-Absorbing Handle Type

{SI



SDS max Shank



2-speed Gear







LVH

H41 SST

Demolition Hammer



Features

- 1,010w high power input
- Low vibration handle (LVH) for less user fatigue
- Soft-grip side handle

Specifications		
1,010W		
2,900/min		
17mm Hex		
458mm		
5.7kg with side handle, without cord		
Bull Point, Flat Chisel, Side Handle, Wrench, Grease, Carrying Case		

MRP: ₹ 20,790/-

LVH

H41 MB2

Demolition Hammer



Features

- Lightweight for less fatigue
- Resin cylinder case cover
- Multiple bit-angle settings

Specifications		
Power Input	950W	
Full Load Impact Rate	3000/min	
Bit Shank	SDS max	
Overall Length	427mm	
Weight	5.2kg	
Standard Accessories	Side Handle, Bull Point, Carrying Case	

MRP: ₹ 39,780/-

H60 MC (V)

Demolition Hammer



Features

- Easy to change tool by single-step holder
- Variable lock mechanism to adjust tool at 2-step angle
- Functional and robust design
- Variable speed
- Robust & Sturdy operational suitability

	Ove
	Wei
SDS	Stan

	Specifications		
	Power Input	1,250W	
	Full Load Impact Rate	1,600/min	
	Bit Shank	SDS max	
ı	Overall Length	570mm	
	Weight	11.3kg	
	Standard Accessories	Side Handle, Carrying Case, Bull Point	

MRP: ₹ 55,200/-

















H 60ME

Demolition Hammer Features



- Compatible with engine generators
- Power lamp lights up when the plug is inserted into an outlet
- One push action for quick bit mounting
- Tool bit angle adjustment
- Large trigger switch

Specifications		
Power Input	1,500W	
Full Load Impact Rate	1,500-2,100/min	
Bit Shank	SDS max	
Overall Length	585mm	
Weight	11.6kg	
Standard Accessories	Bull Point, Side Handle, Carrying Case	

MRP: ₹ 68,000/-

PH 65A

Demolition Hammer



Features

- Heavy blow chipping mechanism
- Durable tool retainer
- Adjustable side handle

Specifications		
Power Input 1,240W		
Full Load Impact Rate	1,400/min	
Bit Shank	30mm Hex	
Overall Length	642mm	
Weight	15.0kg	
Standard Accessories	Bull Point, Side Handle, Wrenches, Oil Feeder, Carrying Case	

MRP: ₹ 68,440/-





H 65SB3 **Demolition Hammer** 999086 W

Features

AUTO STOP

- Due to the large heavyweight (cylindrical) striker, the chisel easily cuts into concrete, which makes users feel more comfortable during demolition work
- Lock-on button allows continuous operation without holding the switch lever
- Soft grip handles for more comfort
- Large switch lever for more control



Specifications		
Power Input	1,340W	
Full Load Impact Rate	1,400/min	
Bit Shank	30mm Hex	
Overall Length	731mm	
Weight	18.0kg	
Standard Accessories	Bull Point, Carrying Case	

MRP: ₹ 89,210/-

30 mm



Single







SDS max Shank









UVP FILEBOOY







Power Input	110V : 1,560W, 1,670W 120V, 127V : 1,800W 220V, 230V, 240V : 2,000W
Bit Shank	28.5 Hexagon
Full Load Impact Rate	1,000/min
Overall Length	860mm
Weight	32.0kg
Standard Accessories	Hex. Bar Wrench


Specifications

MRP: ₹ 1,60,680/-

Features

- High demolition performance
- Soft grip handles for more comfort
- Large switch lever for more control







28.5mm hex shank



W 6VA4

6mm Screw Driver



Features

- Detachable nose piece for easy to change and adjust a bit
- Soft grip handle
- Aluminium gear cover for durability
- Large trigger switch



6mm

6mm

FHB

BRUSHLESS

BRUSHLESS

MRP: ₹ 16,650/-

WR 22SE

22mm Impact Wrench






Features

- Stable performance provided even at voltage drops
- Soft grip handle
- Tumbler-type forward/reverse switch
- Compatible with engine generators





MRP: ₹ 60,690/-

WR 25SE

25mm Impact Wrench







Features

- Stable performance provided even at voltage drops
- Soft grip handle
- Tumbler-type forward/reverse switch
- Compatible with engine generators







Compositu	Ordinary Bolt 22-30mm	
Capacity	High Tension Bolt	22-24mm
Tightening Torque	1,000Nm	
Square Drive	25.4mm	
Power Input	900W	
No Load Speed	1,100/min	
Impact Rate	1,500/min	
Overall Length	340mm	
Weight	8.4kg	
Standard Accessories	Side Handle, Carrying Case	

Specifications

MRP: ₹ 94,500/-















G 10552

100mm Disc Grinder with Slide Switch



Features

- Newly-designed large fan and optimized air flow ensure efficient motor cooling for a long lifetime
- Small grip circumference of 197mm

Specifications				
C:t	Wheel Dia	100mm		
Capacity	Hole Dia	16mm		
Spindle Thread	M10 x 1.5	M10 x 1.5		
Power Input	600W	600W		
No Load Speed	11,500/min. :	11,500/min. : 220-240V		
Overall Length	254mm	254mm		
Weight	1.7kg	1.7kg		
Standard Accessories	Side Handle,	Side Handle, Wrench		

MRP: ₹ 3,900/-

PDA-100M

100mm Disc Grinder with Snap Switch



Features

- 100mm, 715W mini grinder
- Snap switch easy to use
- Excellent overload durability



MRP: ₹ 5,700/-

G 10SN2

100mm Disc Grinder with Slide Switch





Features

 High power 900W motor provides more efficient work

Specifications		
C	Wheel Dia	100mm
Capacity	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	900W	
No Load Speed	10,500/min	
Overall Length	266mm	
Weight	1.8kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 7,400/-



HiKOKI

G 10VE2

100mm Electronic Disc Grinder with Slide Switch

Features

- 3-position side handle
- Kickback protection
- Durable and dust resistant design
- Small grip circumference for more comfort and control
- Variable speed control
- Restart protection
- Soft Start
- After the motor has stopped due to over loading, it gets auto activated if load reduce within 1.5 seconds

BRUSHLESS

	Specificati	ions
	Wheel Dia	100mm
Capacity	Hole Dia	16mm
	Thickness	6mm
Spindle Thread	M10 x 1.5	
Power Input	1,320W	
Max Power Output	1,900W	
No Load Speed	2,800 - 10,000/min	
Overall Length	309mm	
Weight	1.8kg	
Standard Accessories	Wheel Guard, Side Handle, Wrench	

MRP: ₹ 16,000/-

PDA-125M

125mm Disc Grinder with Snap Switch



Features

- 125mm, 715W grinder
- Snap switch that is easy to use
- Outer carbon brush for easy maintenance



MRP: ₹ 7,500/-

G 13SR4

125mm Disc Grinder with Slide Switch



Features

- Newly-designed large fan and optimized air flow ensure efficient motor cooling for a long lifetime
- Small grip circumference of 197mm

Specifications				
C:t	Wheel Dia	125mm		
Capacity	Hole Dia	22.23mm		
Spindle Thread	M14 x 2	M14 x 2		
Power Input	730W			
No Load Speed	10,000/min.			
Overall Length	258mm			
Weight	1.8kg			
Standard Accessories	Side Handle, Wrench			

MRP: ₹ 6,720/-















G 13SW

125mm Disc Grinder with Slide Switch





Features

- Max power output 1,600W
- Tool-less wheel guard
- Vibration-Absorbing side handle
- Small grip circumference (202mm) for more control and comfort

Specifications			
C!+	Wheel Dia	125mm	
Capacity	Hole Dia	22.2mm	
Spindle Thread	M14 x 2		
Power Input	1,200W		
No Load Speed	12,000/min		
Overall Length	277mm		
Weight	2.3kg		
Standard Accessories		Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 8,820/-

G 13SB4

125mm Disc Grinder with Slide Switch

999088 W



Features

- Toolless wheel guard
- **Excellent overload durability**
- Improved dust protection against short circuit





Capacity	Wheel Dia	125mm
Capacity	Hole Dia	22.2mm
Spindle Thread	M14 x 2	
Power Input	1,400W	
No Load Speed	11,500/min	
Overall Length	288mm	
Weight	2.4kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

Specifications

MRP: ₹ 9,740/-

G 15SA2

150mm Disc Grinder with Trigger Switch

999043 W



Features

- Max power output 2,100W
- 3-position side handle
- New dust seal design

Specifications			
C	Wheel Dia	150mm	
Capacity	Hole Dia	22.2mm	
Spindle Thread	M14 x 2		
Power Input	1,200W	1,200W	
No Load Speed	8,500/min		
Overall Length	391mm		
Weight	2.8kg		
Standard Accessories		Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 13,220/-







G 18ST

180mm Disc Grinder with Trigger Switch







Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected from dust and debris through the labyrinth construction
- Large switch lever for more control

Specifications			
Compositu	Wheel Dia	180mm	
Capacity	Hole Dia	22.23mm	
Spindle Thread	M14 x 2		
Power Input	2,000W		
No Load Speed	8,500/min		
Overall Length	469mm		
Weight	4.9kg		
Standard Accessories	Side Handle, Wrench		

MRP: ₹ 10,820/-

G 18SH2

180mm Disc Grinder with Trigger Switch





_							
	-	-	4.	п	м	_	-
	_	\sim			ш	_	9

- Designed with reliability & robustness
- Increased service life of carbon brush
- Dust proof construction

	Specifications	•
C	Wheel Dia	180mm
Capacity	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,000W	
No Load Speed	8,500/min	
Overall Length	463mm	
Weight	4.3kg	
Standard Accessories	Side Handle, Wrench	

Considerations

MRP: ₹ 14,050/-

G 18BYE





Features

- Safety function Brake function, kickback protection system, 0 voltage restart protection, overload protection & Over heat protection
- Soft start
- Tool less wheel guard
- Detachable filter

Specifications			
C:tu.	Wheel Dia	180mm	
Capacity	Hole Dia	22.23mm	
Spindle Thread	M14 x 2		
Power Input	2,200W	2,200W	
No Load Speed	6600/min		
Overall Length	468mm		
Weight	4kg		
Standard	Depressed center Wheel, Side		
Accessories	Handle, Wrench		

MRP: ₹ 26,700/-





G 18SW2

180mm Disc Grinder with Trigger Switch







<u>ISP</u>

Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Soft grip handle
- Large switch lever for more control

	Specifications	;	
C:	Wheel Dia	180mm	
Capacity	Hole Dia	22.23mm	
Spindle Thread	M14 x 2		
Power Input	2,200W	2,200W	
No Load Speed	8,500/min		
Overall Length	469mm		
Weight	4.9kg		
Standard Accessories	Side Handle, Wrench		

MRP: ₹ 14,500/-

G 18SE4

180mm Disc Grinder with Trigger Switch



Features

- Small and high power split core motor provides less weight
- Vibration-absorbing side handle
- Tool-less wheel guard



MRP: ₹ 16,830/-

G 23ST

230mm Disc Grinder with Trigger Switch







<u>ISP</u>

Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Large switch lever for more control

Specifications				
C	Wheel Dia	230mm		
Capacity	Hole Dia	22.23mm		
Spindle Thread	M14 x 2	M14 x 2		
Power Input	2,000W	2,000W		
No Load Speed	6,600/min	6,600/min		
Overall Length	469mm			
Weight	5.1kg			
Standard Accessories	Side Handle, \	Side Handle, Wrench		

MRP: ₹ 13,430/-







G 23SC4

230mm Disc Grinder with Trigger Switch





Features

- Small and high power split core motor provides less weight
- Vibration-absorbing side handle
- Tool-less wheel guard



Specifications			
C	Wheel Dia	230mm	
Capacity	Hole Dia	22.23mm	
Spindle Thread	M14 x 2		
Power Input	2,400W		
No Load Speed	6,600/min		
Overall Length	492mm		
Weight	6.1kg		
Standard Accessories	Side Handle, Wrench		

MRP: ₹ 17,340/-

GP 2S2

25mm Hand Grinder





Features

- All ball bearing construction
- Easy-to-grip housing
- Internal carbon brush

Specifications			
Cit	Collet Chuck	6mm	
Capacity	Max. Wheel Dia	25mm	
Power Input	520W	520W	
No Load Speed	29,000/min	29,000/min	
Overall Length	359.4mm		
Weight	1.7kg		
Standard Accessories	Side Handle, Wrenches		

BRUSHLESS

MRP: ₹ 14,630/-

GP 3V

25mm Electronic Hand Grinder



Features

- Power Input 760W
- Brushless motor technology
- Variable speed by dial
- Easy to grip housing
- Electronic control soft start & constant speed



Specifications				
	Collet Chuck	6mm		
Capacity	Max. Wheel Dia	25mm		
Power Input	760W	760W		
No Load Speed	7,000-29,000/mir	7,000-29,000/min		
Overall Length	406mm			
Weight	1.8kg			
Standard Accessories	Side handle, collet chuck, Wrenches			

MRP: ₹ 19,980/-





POLISHING / SANDING



S 15SB

150mm Sander Polisher





IS₽

<u>ISP</u>

Features

- Max power output 900W
- A metal bush on a ball bearing for durability
- Soft grip handle

Specifications				
Capacity	Sanding Disc	150mm		
Spindle Thread	M16x2			
Power Input	705W	705W		
No Load Speed	4,500/min			
Overall Length	194mm			
Weight	2.0kg			
Standard	Side Handle, Rubber Pad, Sanding			
Accessories	paper, Wrench			

MRP: ₹ 17,860/-

SAT 180

180mm Sander Polisher





Features

- For sanding and polishing
- 2-Speed: High and Low

Specifications				
C	Sanding Disc	180mm		
Capacity	Wool Bonnet	180mm		
Spindle Thread	M14x2			
Power Input	705W	705W		
No Load Speed	Lo: 1,900/min. Hi: 3,400/min			
Overall Length	395mm			
Weight	2.9kg			
Standard	Side Handle, Rubber Pad, Wool			
Accessories	Bonnet, Sanding Discs, Wrenches			

MRP: ₹ 14,400/-

SP 18VA

180mm Electronic Sander Polisher





Features

- Max power output 2,560W
- For sanding and polishing
- Overload protection
- 2 ways of changing speed: Trigger and dial
- Durable bearing design

Specifications			
C	Sanding Disc	180mm	
Capacity	Wool Bonnet	180mm	
Spindle Thread	M14x2		
Power Input	1,250W	1,250W	
No Load Speed	0-3,400/min.	0-3,400/min.	
Overall Length	415mm		
Weight	2.8kg	2.8kg	
Standard	Loop Handle, F	Loop Handle, Rubber Pad, Wool	
Accessories	Bonnet, Sandir	Bonnet, Sanding Disc, Wrench	

MRP: ₹ 19,660/-

















SV 12SG

110mm Orbital Sander





Features

- Large soft grip for comfort and control
- **Dust collection**



Specifications

7,000-12,000/min

Sanding Paper, Dust Bag

125mm

76 x 533mm

Sanding Disc

230W

415mm

1.4kg

4.5kg

Sanding Belt, Dust Bag

MRP: ₹ 6,930/-

Accessories

Capacity

Weight

Standard

Accessories

Power Input

No Load Speed

Overall Length

SV 13YA

125mm Random **Orbital Sanders**















MRP: ₹ 9,990/-

Features

- Random orbit sanding action
- Large soft grip for comfort and control
- **Dust collection**

SB 8V2 76mm Belt Sander

999043 🞹



Features

- Sanding position visible through transparent
- Variable speed dial
- Dust bag on the left of the tool body for sanding at corner
- Width 171mm







MRP: ₹ 19,660/-

Weight

Standard

Accessories















C 7SS

190mm Circular Saw





ī	=	1	





Specifications			
Capacity	Blade Dia.	190mm	
	Max Cutting depth 90°	68mm	
	Max Cutting depth 45°	46mm	
Bevel Capacity	0-45°		
Power Input	1,050W	1,050W	
No Load Speed	5,500/min.		
Overall Length	291mm	291mm	
Weight	3.4kg	3.4kg	
Standard Accessories	Blade, Guide, V	Blade, Guide, Wrench	

MRP: ₹ 7,830/-

Features

- Rigid aluminium base for fine cut
- Side handle easy to grip
- Backward dust emission

C 7ST

185mm Circular Saw







Features

- Power input 1,710W
- Enhanced max cut depth
- Soft grip handle for reduced vibration & increased comfort





MRP: ₹ 12,000/-

C9SA3

235mm Circular Saw





Features

- 4m cord
- Convenient cord holder
- Aluminium saw cover
- Soft grip handle
- Large knob easy to adjust cut depth







Specifications			
	Blade Dia.	235mm	
Capacity	Max Cutting depth 90°	86mm	
	Max Cutting depth 45°	65mm	
Power Input	2,000W		
No Load Speed	5,200/min		
Overall Length	397mm		
Weight	7.0kg		
Standard Accessories	Blade, Side Handle, Guide, Bolt, Wrench, Dust Collector, Short Lever		

MRP: ₹ 22,000/-













C 10FCE2

255mm Compound Miter Saw





Features

- Thumb actuated positive miter stops for quick and easy adjustment
- Soft grip handle
- Equipped with chip deflector
- Pivoting Sub-Fence for supporting larger stock





_	Blade Dia.	255mm	
	(HxW) Cross Cut 0°	59 x 144mm or 89 x 101mm	
Consists	(HxW) Miter Cut 45°	59 x 102mm or 89 x 70mm	
Capacity	(HxW) Miter Cut 52°	59 x 89mm or 89 x 54mm	
	(HxW) Bevel Cut 45°	41 x 144mm	
	Compound Miter 45° and Beve 45° 41 x 102mm		
Power Input	1,520W		
No Load Speed	5,000/min		
NA:ton America	Right	0 – 52°	
Miter Angle:	Left	0 – 52°	
Bevel Angle	Left	0 – 45°	
Positive Miter Angle Stop	0, 15, 22.5, 31.6 and 45°		
Dimensions	460 x 628 x 561mm		
Weight	11.5kg		
Standard	Blade, Dust Bag, Vise Assy, Sub		
Accessories	Fence, Wrenches		

Specifications

MRP: ₹ 26,100/-

Blade Dia.

No-Load Speed

Miter Angle

Arbor

C 12FDHB

305mm Compound Miter Saw





Features

- Xact Cut LED Shadow Line System Accurately indicates where the blade will cut on the material
- Compound Cutting Wide range of miter and bevel cutting options
- Fences 7" tall sliding fences to support vertically & nested cut molding
- Extra large base for great support & handling of material
- Adjustment Up-front miter and locks to easily adjust cut angles to best suit the application
- New ergonomic D-handle design for less vibration

Spindle Lock









Specifications

305mm

25.4 mm

4,300 RPM

0-52° L & R

MRP: ₹ 41,000/-







Pneum

FCJ 65V3 65mm Jig Saw





Features

- Variable speed dial
- Large soft grip for comfortable operation
- Motor with two ball-bearings for longer life and efficient power transmission
- Connectable directly with a dust collector without adapter

	Specifications			
	Wood	65mm		
Capacity	Mild Steel Plate	6mm		
Сараспу	Min. Cutting Radius	25mm		
Base Tilt Angle	45° Right/Left			
Power Input	400W	400W		
Length of Stroke	18mm			
No-Load Speed(stroke)	0-3,000/min			
Overall Length	197mm			
Weight	1.5kg			
Standard	Blade, Splinter Guard, Chip Cover,			
Accessories	Wrench			

MRP: ₹ 8,550/-

;;;

(3)

STOP

CJ 90VST2

AC 90mm Jig Saw








Features

- Variable speed dial
- Larger lever for quick and easy, tool-less blade change
- 4-mode orbital action
- Soft grip handle
- Powerful dust blower keeps debris away



MRP: ₹ 11,660/-

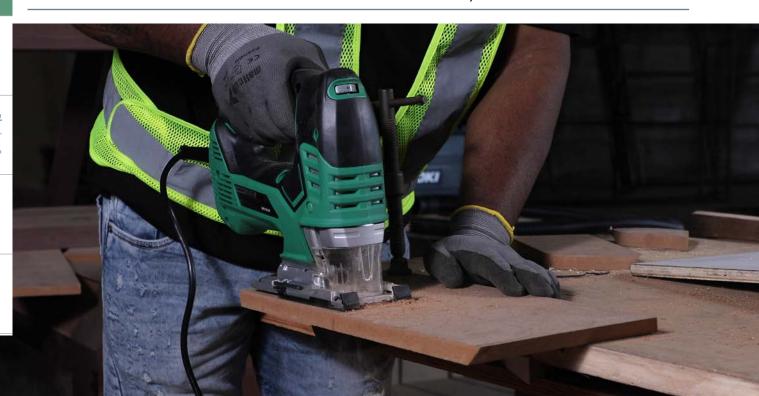

CR 13V2

130mm Reciprocating Saw



- Straight cutting action
- Quick blade change by lever
- Blade mount reversible to cut upward or downward
- Large switch to operate in upside-down
- Newly-designed front cover and handle to hold
- 150mm Curved blade included as standard

Specifications			
	Pipe	130mm	
Capacity	Steel Plate	19mm	
	Wood	300mm	
Power Input	1,010W		
Length of Stroke	29mm		
No Load Speed (stroke)	0-2,800/min.		
Overall Length	435mm		
Weight	3.3kg		
Standard Accessories	Blade, Wrenches, Carrying Case		

MRP: ₹ 21,840/-

	Double
ш	Insulation



Variable Speed



CS 40Y

400mm Chain Saw







Features

- Balanced design for more control
- Tool-less chain adjuster
- Large switch lever with soft start and
- Front and rear handles with soft grip

Specifications		
Voltage	230V	
Power Input	2,000W	
No Load Chain Speed	14.5m/s	
Chain Pitch	3/8"	
Chain Gauge	0.05"	
Guide Bar Length	400mm	
Type of Guide Bar	Sprocket Nose	
Oil Tank Capacity	150mL	
Dimensions (LxWxH)	490x217x220mm	
Dry Weight	5.5kg	
Standard Accessories	Guide Bar, Saw Chain, Plug Clip Chain Case	

MRP: ₹ 19,800/-

- over-load protection
- Chain oil flow adjuster

CM 4ST 110mm Cutter 999043 🞹



Е	_	-	4		100	20
г	ᆫ	a	I.	u	Ιt	=5

- **Dust Proof Switch**
- Power input 1,300W with overload durability



(A)

STOP

Specifications		
Canacity	Wheel Dia.	110mm
Capacity	Max Cut Depth	34mm
Power Input	1,300W	
No Load Speed	13,000/min	
Overall Length	214mm	
Weight	2.9kg	
Standard Accessories	Wrench	

MRP: ₹ 6,580/-

CM 4SB2

110mm Cutter





Features

- Metal bush on a ball-bearing and sealed armature coil for durability
- Soft grip handle
- Tool-less depth adjustment

	Specifications		
	Wheel Dia.	110mm	
Capacity	Max Cut Depth	34mm	
	Cut Depth per cut	20mm	
Power Input	1,320W		
No Load Speed	11,500/min		
Overall Length	204mm		
Weight	2.8kg		
Standard	Water Plug, Rubber Connector,		
Accessories	Wrenches, Vinyl Hose		

MRP: ₹ 6,750/-









CC 14STA

355mm High-Speed **Cut-off Machine**



Features

- Lightweight design
- Quick lock vise
- Spark diversion guard
- With Spindle lock mechanism





MRP: ₹ 13,740/-

CC 14STD

355mm High-Speed **Cut-off Machine**



Features

- With powerful motor of 2,200W
- With Spindle lock mechanism
- D-shaped handle
- Quick lock vise
- Spark diversion guard





擊

	Capacity : Cut-off Wheel Dia.	355mm
	Power Input	2,200W
	No Load Speed	3,800/min
	Max Working Perphera Speed	4,800m/min.
	Dimensions (L x W x H)	590 x 300 x 640mm
	Weight	17.0kg
	Standard Accessories	Cut-off Wheel, Wrench

Specifications

355mm

2,200W

17.0kg

3,800/min

4,800m/min.

590 x 300 x 650mm

Cut-off Wheel, Wrench

Specifications

MRP: ₹ 17,970/-

CC 14STDU

355mm High-Speed **Cut-off Machine**



Features

- With powerful motor & Soft start
- With Spindle lock mechanism
- D-shaped handle
- Quick lock vise
- Spark diversion guard









Standard Accessories	_
MRP: ₹ 21,740/-	

Capacity: Cut-off Wheel Dia.

Max Working Perphera Speed Dimensions (L x W x H)

Power Input

No Load Speed

P 20ST

82mm Planer



Features

- Max cutting depth of 1.5mm
- Compact & light weight
- Rabbeting depth: 9mm
- Easy to adjust cutting depth by knob
- Optional dust bag or elbow can be connected



Specifications	
Capacity: Cutting Width	82mm
Max Cutting Depth	1.5mm
Power Input	580W
No Load Speed	17,000/min
Overall Length	296mm
Weight	2.5kg
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench

MRP: ₹ 8,030/-





Spindle Lock





M 12SA2 12mm Router





Features

- Fine adjustment by knob and lever
- Soft grip handle
- Improved clutches for collet chuck
- Bench stand available as an optional accessory



MRP: ₹ 20,210/-

M 12SC

12mm Router





Features

- Powerful motor 900W
- 6mm Collet chuck
- Compact & light weight





Specifications	
Capacity: Collet Chuck	6X12mm
Stroke	65mm
Power Input	900W
No Load Speed	25,000/min
Weight	3.3kg

MRP: ₹ 12,010/-

Chargers, Batteries

Drilling

molition

astening

Sandin

Sawing

AW 100

High Pressure Washer

335549 W



Features

- Max Pressure 100 Bar & portable
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use

Specifications			
Voltage (by areas)		Single-phase AC 50/60Hz Voltage 220V to 240V	
Power Input		1,400W	
Max. Discharge Pressure		7.0MPa (1MPa: 10.2 kgf/ cm2)	
Max Permissible Pressure		10.0MPa	
Max Feed Pressure		0.7MPa	
Max Water Discharge		5.5L/min	
Permissible Temperature		40°C or less	
Water Feeding Method		Faucet connection type	
Dimensions (L x W x D)		305 x 245 x 465mm	
Weight		5.4kg	
Standard Accessories Trigger gun, High-pressure hose Variable nozzle, Detergent bott nozzle, Water feed connector, N cleaner pin, Cord holder, Gun h Handle (with 2 attachment scre		nozzle, Detergent bottle /ater feed connector, Nozzle in, Cord holder, Gun holder,	

MRP: ₹ 10,970/-

AW 130

High Pressure Washer

335599 <mark>W</mark>



Features

- Max Pressure 130 Bar
- Washing of the wide range is possible with a long highpressure hose
- With wheels and handle for easy movement
- With siphon function
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use

Specifications		
Voltage (by areas)		Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input		1,600W
Max. Discharge Pressure		9.0MPa (1MPa: 10.2 kgf/ cm2)
Max Permissible Pre	essure	13.0MPa
Max Feed Pressure		0.7MPa
Max Water Dischar	ge	6.0L/min
Permissible Temper	ature	40°C or less
Water Feeding Method		Faucet connection type
Dimensions (L x W x D)		325 x 260 x 790mm
Weight		8.3kg
Standard Accessories	Trigger gun, High-pressure hose (10m), Variable nozzle, Turbo nozzle Detergent bottle nozzle, One-touch joint (black)(For use with the straine hose), Water feed connector, Nozzle cleaner pin, Cord holder, Handle (with 4 attachment screws)	

MRP: ₹ 18,300/-

AW 150

High Pressure Washer



Features

- Max Pressure 150 Bar
- Washing of the wide range is possible with a long high-pressure hose
- Variable nozzle (Direct injection / Wide angle) can be used with pressure adjustment
- Large hose reel for convenient storage
- With wheels and handle for easy movement
- With siphon function
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use



Specifications		
Voltage (by areas)	Single-phase AC 50/60Hz Voltage 220V to 240V	
Power Input	2,000W	
Max. Discharge Pressure	11.0MPa (1MPa: 10.2 kgf/cm2)	
Max Permissible Pressure	15.0MPa	
Max Feed Pressure	0.7MPa	
Max Water Discharge	6.67L/min	
Permissible Temperature	40°C or less	
Water Feeding Method	Faucet connection type	
Dimensions (L x W x D)	425 x 345 x 905mm	
Weight	12.4kg	
Standard Accessories	Trigger gun, High-pressure hose (10m), Variable nozzle (with pressure adjuster), Turbo nozzle, Detergent bottle (stored inside the unit), Onetouch joint (black) (For use with the strainer hose), Water feed connector, Nozzle cleaner pin, Gun holder, Hose handle, Gun support (with 1 attachment screw)	

MRP: ₹ 34,320/-

CN 16SA

1.6mm (16 Gauge) Nibbler





Specifications				
Capacity	Steel	1.6mm		
	Stainless	1.2mm		
Capacity: Cutting Width	5mm	5mm		
Min. Cutting Radius	40mm	40mm		
Power Input	400W	400W		
No Load Speed	2,300/min	2,300/min		
Overall Length	250mm	250mm		
Weight	1.6kg			
Standard Accessories 2 Hex.		Wrenches		

MRP: ₹ 33,960/-

Features

- 3 positive stop die holder allows for straight, right and left cutting
- Downward cutting allows for cutting of trapezoidal metal plate

RB 40SA Blower





Features

- Soft grip handle
- Stands alone
- Heavy duty for industrial cleaning purpose

		Specifications	
	Compositu	Air Pressure	5.5kPa
	Capacity	Air Volume Flow	3.8m3/min
	Power Input	550W	
_	No Load Speed	16,000/min	
	Overall Length	447mm	
	Weight	1.7kg	
111	Standard Accessories	Nozzle, Dust Bag	

MRP: ₹ 7,010/-

UM 12VST2 120mm Mixer



Features

- Easy-to-operate soft grip handle
- Optimally-positioned variable speed
- Steel frame integrated with the
- 0-voltage restart protection and overload protection



	Capacity	
	Power In	
	Tool Spir	
6	No Load	





_	Power Input	1,200W	
	Tool Spindle Thread	M14	
6	No Load Speed	High	300 - 650/min
	No Load Speed	Low	150 - 300/min
	Overall Length	336mm	
	Weight	5.4kg	
LOWHIGH	Standard Accessories	Stirrer	

Specifications

Max Stirrer Dia.

MRP: ₹ 16,200/-













120mm

Demolition

HiKOKI

UM 16VST2

160mm Mixer



Features

- Easy-to-operate soft grip handle
- Optimally-positioned variable speed dial
- Steel frame integrated with the handle
- 0-voltage restart protection and overload protection



Specifications		
Capacity	Max Stirrer Dia.	160mm
Power Input	1,600W	
Tool Spindle Thread	M14	
No Load Speed	High	300 - 650/min
	Low	150 - 300/min
Overall Length	338mm	
Weight	5.7kg	
Standard Accessories	Stirrer, Extension Bar	

MRP: ₹ 18,550/-

RH 600T

Heat Gun





Features

- 2 Heat Settings
- Cool air shot for quick cooling down
- Hanging hook for easy storage and stationary use
- Overheating protection
- Soft grip handle for more control and comfort

	Specifications		
Voltage	220V-240V		
Power Input	2,000W		
Capacity: Wind Volume	0.25/0.5m³/min (2-stage switch)		
Capacity: Wind Temperature	450/600°C (2-stage switch)		
Wind Temperature (when the cooling button is used)		50°C	
Overall Length	245mm		
Weight	0.57kg		
Standard Accessories*	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case		

*Standard accessories may vary by country or area

MRP: ₹ 2,540/-

RH 650V

Heat Gun



Features

- LCD display for showing temperature and wind power settings
- Continuous adjustable temperature and variable air flow for different applications
- Constant Heat Control for continuous work without overheating
- High stability for stationary use
- Soft grip handle for more control and comfort

	Specifications		
Voltage	220V-240V		
Power Input	2,000W		
Capacity: Wind Volume	0.25/0.5m³/min (5-stage switch)		
Capacity: Wind Temperature	50 - 650°C (in increments of 10°C)		
Overall Length	245mm		
Weight	0.79kg		
Standard Accessories*	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case		

MRP: ₹ 6,730/-

*Standard accessories may vary by country or area





Variable Speed







C 10RJ

AC 254mm Table Saw

Features

- Adjustable rip fence and outfeed support for larger cutting capacity.
- Stable and durable fold and roll stand for easy transportation
- Powerful 1,500W motor



Specifications				
Maximum Cutting Capacity	Cutting Depth (90 Degree)	6,500/min		
	Cutting Depth (45 Degree)	5,500/min		
	Rip fence ext. length (right)	4,000/min		
	Rip fence ext. length (left)	559mm		
No Load Speed	4,500 (min-1)			
Blade Diameter	254mm			
Blade Bore	30mm			
Dimensions (L x W x H)	920 x 770 x 600mm			
Weight	44kg (includes table)			
Standard accessories*	TCT Saw Blade 254mm, push stick & wrenches			
*Standard accessories may vary by cour	ntry or area			









MRP: ₹ 78,000/-

EC 68

24 LTR Air Compressor

Features

- 24 LTR Tank capacity
- Automatic protection against overload
- Universal socket outlet
- 2 solid rubber wheel for easy transport



Specifications					
Type of Motor	Induction				
Tank Capacity	24 Ltrs				
Air Pressure	8 Bar				
Power Input	1.5 hp				
Weight	28kg				

MRP: ₹ 28,990/-













Brake

Туре









Head Quarters:

Koki Holdings Co., Ltd.

Shinagawa intercity Tower A, 20th Floor, 15-1 Konan 2-chrome, Minato-ku, Tokyo 108-6020 Japan.

Tel; +81-3-5783-0601 Fax: +81-3-5783-0709

Website: www.hikoki-powertools.com

Registered & Head Office:

HiKOKI Power Tools India Pvt. Ltd.

No.11, Old No.9A, 1st Main Road, KIADB Peenya 1st Stage, Bengaluru, Bengaluru Urban - 560058, Karnataka, INDIA.

Tel: 080 - 4117 0777/78 / 2839 6198

Fax: 080 - 4117 1222

Email: ho.mktg@hikoki-powertools.in WebSite: www.hikoki-powertools.in

BRANCHES

Ahmedabad	: 90999 20372	Guwahati	: 98360 92333
Bangalore	: 90083 04461	Hyderabad	: 98487 12443
Bhubaneshwar	: 98302 00254	Jaipur	: 88240 99593
Chennai	: 99620 92519	Kolkata	: 98311 60116
Cochin	: 95677 61040	Lucknow	: 90267 53265
		Ludhiana	: 76250 01093
Delhi	: 97119 18942	Mumbai	: 75960 26989
Gurgaon	: 97111 92658	Pune	: 97027 86342



For any Customer Support / Service

Toll Free Number

18005725726

Timings: 10am to 6pm

Closed on Saturdays / Sundays and Public holidays.

Authorised distributor :