

**PACH**  
BUILDING FUTURES



## Contact Us

# FOCUS! CORE! BUILDING FUTURES!

Apache is an Indian tribe in North American, according to legend, Apache was a warrior who was brave and invincible, and has been symbolized by Indians as an image of bravery and victory. This tribe has also been known for being intrepid and valiant in the Indian history. Therefore, posterity use his name for the Indian tribes named. Inheriting this tribe's spirit, APACH has been constantly devoted to developing and making top-end tools since its inception.

From 1994, APACH exquisitely designs each of pneumatic tools, and insists on strict durability testing of every piece of key components and parts, as well as rigid pre-delivery inspections of finished products. Just like Apache Indians who are physically strong and capable, APACH's products are durable and can endure under harsh working environments, and therefore are highly recognized and sought-after by professionals worldwide. Today, APACH is a globally known brand.

APACH offers two complete product's line to solve customers' problems, including coil nailers, framing nailers, finish nailers, staplers, carton closing tools and so forth, which are ideal for use in construction, pre-fabricated housing, pallets, furniture, upholstery, fencing and carton closing.

The other is pneumatic tools aeries, including air impact wrench, air screwdriver, air die grinder, air sander and air spray gun, which also are ideal for use in factory assembly line, vehicle repair, bodywork shop and agriculture machine. APACH's website : [www.apach-tools.com](http://www.apach-tools.com) also provides further product information.

Underpinned by strong commitment to Innovation and learning, as well as esprit de corps, APACH continues to launch new products to meet customers' special requirements, pays close attention to each customer's opinions, and provides speedy, timely services to clients. This globally prestigious brand is trustworthy.


## INDEX PAGES



### Coil Nailers


p06-13

CN-57.1	Industrial Coil Nailer	06
CN-57E	Industrial Coil Nailer	07
CN-70.1	Industrial Coil Nailer	07
CN-70E	Industrial Coil Nailer	08
CN-70E2	Industrial Coil Nailer	08
CN-83.1	Industrial Coil Nailer	09
CN-83E	Industrial Coil Nailer	09
CN-83F	Industrial Coil Nailer	10
CN-90.1L	Industrial Coil Nailer	10
CN-90LH	Industrial Coil Nailer	11
CN-100E	Industrial Coil Nailer	11
CN-100EPAL	Industrial Coil Nailer	12
CN-50P	Industrial Coil Nailer	12
CN-565A	Industrial Coil Nailer	13
RN-45E2	Roofing Coil Nailer	13



### Staplers

LU-SJK16F	SJK Series Fine Wire Stapler	29
LU-7116F	71 Series Fine Wire Stapler	29
LU-7116AC	71 Series Fine Wire Stapler	30
LU-7116LAC	71 Series Fine Wire Stapler, Long Nose	30
LU-7116.1AUTO	71 Series Auto-Fire Staplers	31
LU-7116.1AUTO/LM	71 Series Auto-Fire Staplers, Long Magazine	31
LU-1416AC	14 Series Fine Wire Stapler	32
LU-2316F	23 Series Fine Wire Stapler	32
LU-9716F	97 Series Fine Wire Stapler	33
LU-9725AC	97 Series Fine Wire Stapler	33
LU-8416AC	98 Series Fine Wire Stapler	34
LU-8016F	98 Series Fine Wire Stapler	34
LU-8016AC.1	80 Series Fine Wire Stapler	35
LU-8016.1AUTO	80 Series Auto-Fire Staplers	36
LU-8016.1AUTO/LM	80 Series Auto-Fire Staplers, Long Magazine	36
LU-8025AC	80 Series Fine Wire Stapler	37
LU-425JAC	4J Series Stapler	37
LU-1010FAC	10F Series Fine Wire stapler	38
LU-1016F	10F Series Fine Wire stapler	38
LU-1013JAC	10J Series Fine Wire Stapler	39
LU-1016J	10J Series Fine Wire stapler	39
LU-1016AUTO	MAX 10 Series Auto-Fire Staplers	40
LU-1025JAC	10J Series Stapler	40
LU-1116.1AUTO/LM	All Series Auto-Fire Staplers, Long Magazine	41
LU-5018AC	50 Series Fine Wire Stapler	41
LU-6432	19GA 64 Series Stapler	42
LU-9025AC	18 GA Narrow Crown Stapler	42



### Framing Nailers

p15-18

AN9021-1	21 Degree Strip Framing Nailer	15
L3490	34 Degree Strip Framing Nailer	15
AN9034-1	34 Degree Strip Framing Nailer	16
AN-10021E	21 Degree Strip Framing Nailer	16
AN-10034E	34 Degree Strip Framing Nailer	17
AN-10034-1	34 Degree Strip Framing Nailer	17
AN-13021E	21 Degree Strip Framing Nailer	18
AN-16021E	21 Degree Strip Framing Nailer	18

### Finish Nailers

p20-27

PT-630	23 GA Micro Pinner	20
PT-635	23 GA Micro Pinner	20
LMF-40LAC	21 GA Mini Brad Nailer	21
LNF-32AC	18 GA Brad Nailer	21
LNF-50AC	18 GA Brad Nailer	22
LNF-50AC-1	18 GA Brad Nailer	22
LU-50FAC	2-in-1 Combination Tool	23
LT-50LAC	15/16 GA Finish Nailer, Light Duty	23
LT-50LLAC	15/16 GA Finish Nailer & Concrete Nailer, Light Duty	24
LT-1650	15/16 GA Finish Nailer & Concrete Nailer, Heavy Duty	24
LT-1650AC	15/16 GA Finish Nailer	25
LT-1664EB	16 GA Finish Nailer	25
DA-64E-1	DA Series Angle Finish Nailer	26
LT-1464	14 GA Concrete Nailer	26
LHT-64	14 GA Concrete Nailer, Heavy Duty	27
ASD-3040	Concrete Nailer	27

p29-55


LU-9032AC	18 GA Narrow Crown Stapler	43
LU-9040LAC	18 GA Narrow Crown Stapler, Light Duty	43
LU-9040LAD	18 GA Narrow Crown Stapler, Light Duty	44
LU-9040HAC	18 GA Narrow Crown Stapler, Heavy Duty	44
LU-9040KT	18 GA Narrow Crown Stapler, Heavy Duty	45
LU-9225AC	18 GA Medium Crown Stapler	45
LU-9240LAC	18 GA Medium Crown Stapler, Light Duty	46
LU-9240HAC	18 GA Medium Crown Stapler, Heavy Duty	46
LU-G25AC	18 GA Medium Crown Stapler	47
LU-G32HAC	18 GA Medium Crown Stapler, Long Nose	47
LU-G40LAC	18 GA Medium Crown Stapler	48
LU-50040LAC	18 GA Wide Crown Stapler	48
LU-9438AC	18 GA Wide Crown Stapler	49
LU-851LC1	16 GA Medium Crown Stapler	49
LU-851F2	16 GA Medium Crown Stapler	50
LU-864F	16 GA Medium Crown Stapler	50
LU-851KGF2	16 GA Medium Crown Stapler	51
LU-864KGF	16 GA Medium Crown Stapler	51
LU-964F	16 GA Medium Crown Stapler	52
LU-1580F	15 GA Medium Crown Stapler	52
LU-1438.1	14GA Wide Crown Stapler, Light Duty	53
LU-1438	14GA Wide Crown Stapler, Heavy Duty	53
LU-2538.1	16GA Wide Crown Stapler, Light Duty	54
LU-2538	16GA Wide Crown Stapler, Heavy Duty	54
LU-2638.1	16GA Wide Crown Stapler, Light Duty	55
LU-2638	16GA Wide Crown Stapler, Heavy Duty	55



**Specialty Tools**

**p58-66**

LPHC	Pneumatic Hog Ring Tools	58
LPHCN	Pneumatic Hog Ring Tools	59
MS-1619	Mattress Stapler	60
NP-50	Nail Puncher	61
NP-57E	Nail Puncher	61
NP-70E	Nail Puncher	62
LU-8016FP	2-in-1 Medium & Narrow Crown Stapler for Polymer	62
CF-15AA	Corrugated Fastener Tool	63
CF-15AP	Corrugated Fastener Tool	63
PTS-8400	Palm Nailer	64
AMC-38	Metal Connector Nailer	65
AFS-9040	18 GA Flooring Stapler	65
CN-70CL	Pneumatic Clinch Nailer	66
HWFS-50	Hardwood Flooring Stapler	66



**Accessories**

**p74-77**

Hose Reels		74
Marketing Materials	POS & Posters	76
Marketing Materials	Packaging, Apach Shirts	77
Marketing Materials	APACH Shirts	77




**Carton Closing Tools**

**p68-73**

Strip Series	Carton Closing Staplers	68
Strip Series	Carton Closing Staplers	69
Coil Series	Carton Closing Staplers	70
LPB & LPS	Pneumatic Foot Bottomers	71
CJ-38	Jumbo Carton Closing Staplers	72
SP-50	Specialty Tools - Pneumatic Stapling Pliers	73

**Common Applications**

 Roofing, Carpentry	 Cabinets, Furniture, Light wood assembly
 Framing, Joiner	 Packaging, Crating, Pallets
 Upholstery, Furniture, Bedding	 Siding, Sheathing, Paneling, Fencing
 Door, Window, Trimming, Picture Frames, Building Components	 Industrial, Pre-Fabricated Housing

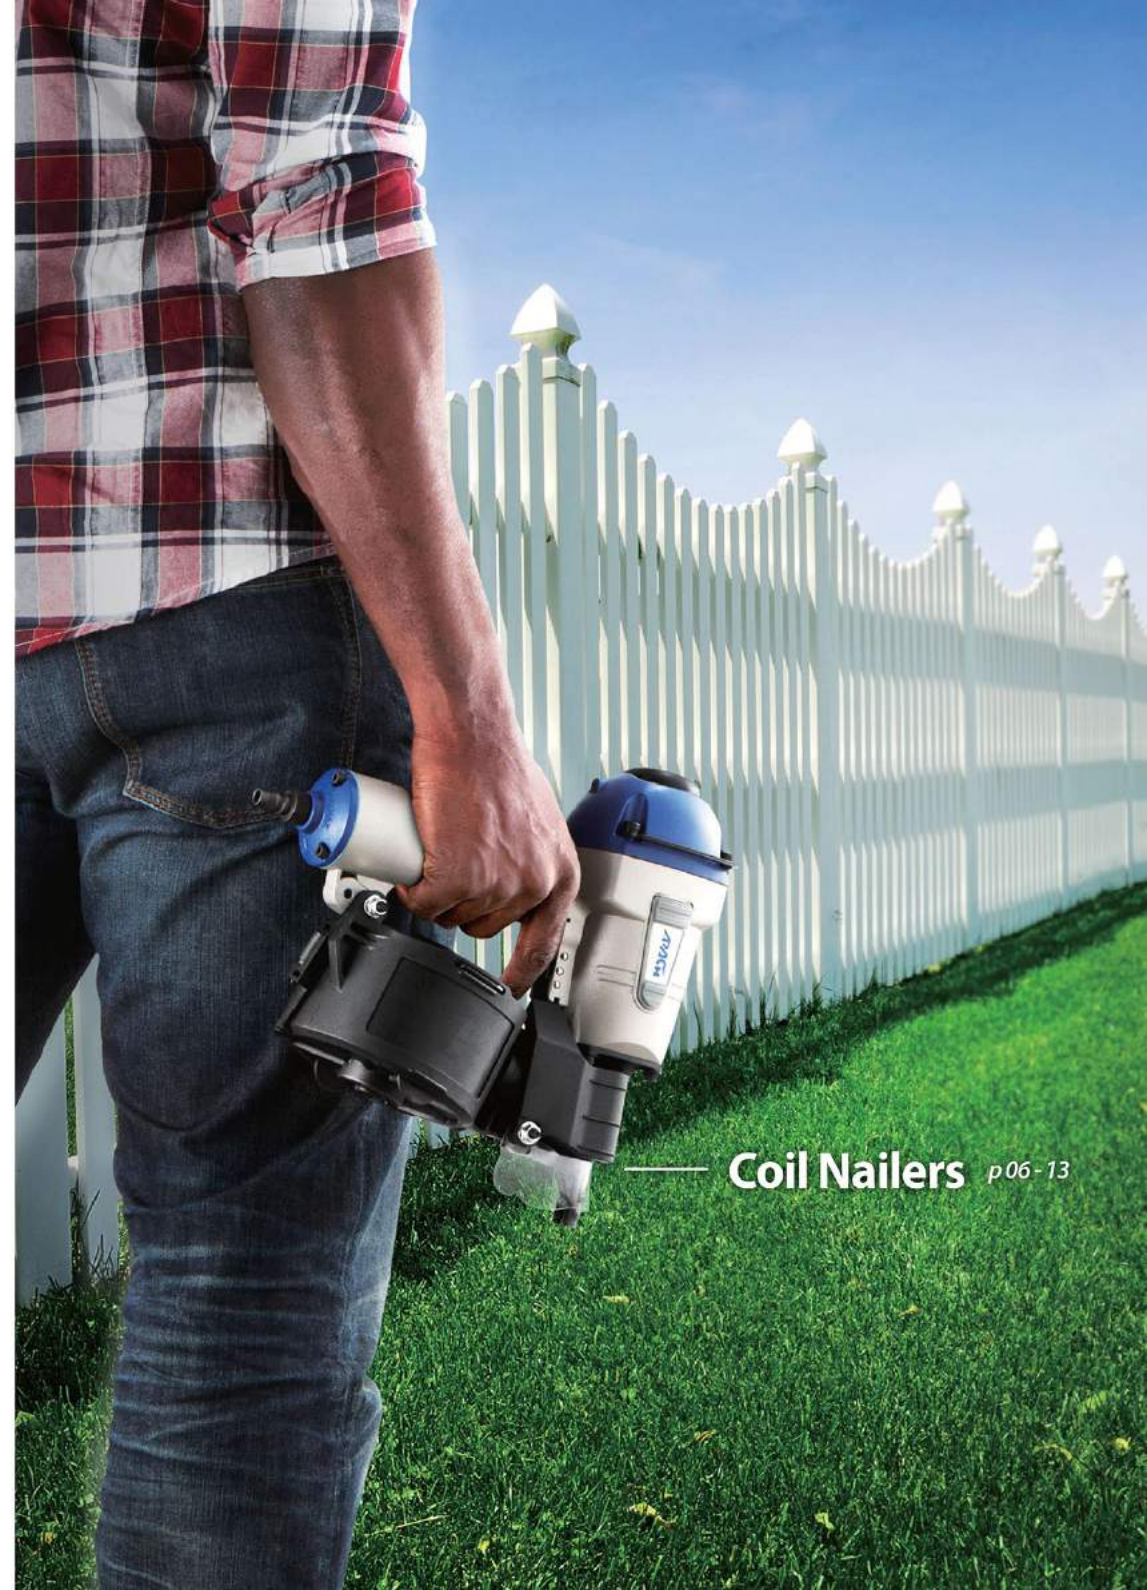


**Coil Nailers** p06-13

## Coil Nailers

Industrial Coil Nailer

### CN-57.1



#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Adjustable Safety Yoke Available
- Body Protectors Equipped

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 1 - 2 1/4" (25 - 57mm)
- Shank Diameter: .083 - .090" (2.1 - 2.3mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.5 kgs	285 x 135 x 285 mm	5 - 7 kg/cm <sup>2</sup>	300 - 400 nails
5.5 lbs	11 7/32 x 5 5/16 x 11 7/32"	70 - 100 psi	300 - 400 nails

## Coil Nailers

Industrial Coil Nailer

### CN-57E



#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- 360° Adjustable Exhaust Port
- Body Protectors Equipped
- Adjustable Safety Yoke Available

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 1 - 2 1/4" (25 - 57mm)
- Shank Diameter: .083 - .090" (2.1 - 2.3mm)
- Shank Type: Smooth, Ring & Screw

#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.5 kgs	285 x 135 x 285 mm	5 - 7 kg/cm <sup>2</sup>	300 - 400 nails
5.5 lbs	11 7/32 x 5 5/16 x 11 7/32"	70 - 100 psi	300 - 400 nails

#### Applications



## Coil Nailers

Industrial Coil Nailer

### CN-70.1



#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Body Protectors Equipped
- Nail Punchers for Pallet Recycling Available
- Top Exhaust Cap Available

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 1 3/4" - 2 3/4" (45 - 70mm)
- Shank Diameter: .090 - .113" (2.3 - 2.9mm)
- Shank Type: Smooth, Ring & Screw

#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.5 Kgs	320 x 125 x 318mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
7.72 lbs	12 5/8 x 4 7/8 x 12 1/2"	70 - 100 psi	225 - 300 nails

#### Applications



## Coil Nailers

Industrial Coil Nailer



### CN-70E

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Body Protectors Equipped
- Nail Punchers for Pallet Recycling Available
- Top Exhaust Cap Available

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 1 3/4" - 2 3/4" (45 - 70mm)
- Shank Diameter: .090 - .113" (2.3 - 2.9mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.62 Kgs	320 x 125 x 318mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
7.96 lbs	12 5/8 x 4 7/8 x 12 1/2"	70 - 100 psi	225 - 300 nails

CN-70E



## Coil Nailers

Industrial Coil Nailer



### CN-83.1

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Body Protectors Equipped
- Adjustable Safety Yoke Available

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 2 - 3 1/4" (50 - 83mm)
- Shank Diameter: .099 - .131" (2.5 - 3.3mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.8 kgs	313 x 129 x 349mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
8.36 lbs	12 5/16 x 5 1/16 x 13 3/4"	70 - 100 psi	225 - 300 nails

CN-83.1



## Coil Nailers

Industrial Coil Nailer



### CN-70E2

#### Features

- With 2-pc Nose Joint Guide
- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Body Protectors Equipped
- Top Exhaust Cap Available

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 1 3/4" - 2 3/4" (45 - 70mm)
- Shank Diameter: .090 - .113" (2.3 - 2.9mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.62 Kgs	320 x 125 x 318mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
7.96 lbs	12 5/8 x 4 7/8 x 12 1/2"	70 - 100 psi	225 - 300 nails

CN-70E2



## Coil Nailers

Industrial Coil Nailer



### CN-83E

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- 360° Adjustable Exhaust Port
- Body Protectors Equipped
- Adjustable Safety Yoke Available

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 2 - 3 1/4" (50 - 83mm)
- Shank Diameter: .099 - .131" (2.5 - 3.3mm)
- Shank Type: Smooth, Ring & Screw


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.7 kgs	313 x 129 x 349mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
8.2 lbs	12 5/16 x 5 1/16 x 13 3/4"	70 - 100 psi	225 - 300 nails

CN-83E

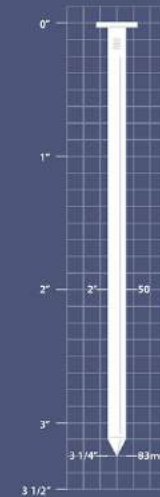

## Coil Nailers

Industrial Coil Nailer



### CN-83F

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Front Exhaust Top Cap
- Body Protectors Equipped
- Adjustable Safety Yoke Available

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 2 - 3 1/4" (50 - 83mm)
- Shank Diameter: .099 - .131" (2.5 - 3.3mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.7 kgs	313 x 129 x 349mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
8.2 lbs	12 5/16 x 5 1/16 x 13 3/4"	70 - 100 psi	225 - 300 nails



## Coil Nailers

Industrial Coil Nailer



### CN-90LH

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance

#### Fasteners


- 15° Flat Wire Collated Nails
- Length: 2 - 3 1/2" (50 - 90mm)
- Shank Diameter: .099 - .131" (2.5 - 3.3mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
4.32 kgs	360 x 130 x 350mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
9.51 lbs	14 3/16 x 5 1/16 x 13 3/4"	70 - 100 psi	225 - 300 nails

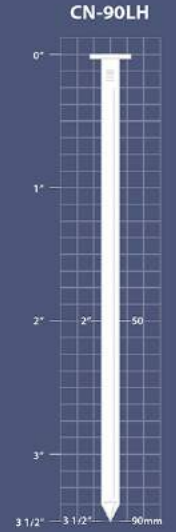

## Coil Nailers

Industrial Coil Nailer



### CN-90.1L

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Anti-double fire mechanism available
- Sequential Trigger Available

#### Fasteners


- 15° Flat Wire Collated Nails
- Length: 2 - 3 1/2" (50 - 90mm)
- Shank Diameter: .099 - .131" (2.5 - 3.3mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.74 kgs	347 x 142 x 365mm	5 - 7 kg/cm <sup>2</sup>	225 - 300 nails
8.23 lbs	13.66 x 5.59 x 14.37"	70 - 100 psi	225 - 300 nails

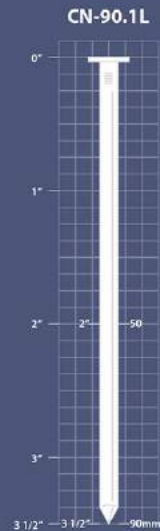

## Coil Nailers

Industrial Coil Nailer



### CN-100E

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Removable Auxiliary Side Handle
- Body Protectors Equipped

#### Fasteners


- 15° Flat Wire Collated Nails
- Length: 2 1/2 - 4" (65 - 100mm)
- Shank Diameter: .099 - .131" (2.5 - 3.3mm)
- Shank Type: Smooth, Ring & Screw

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
5.36 kgs	355 x 141 x 412mm	5 - 7 kg/cm <sup>2</sup>	200 - 300 nails
11.8 lbs	14 x 5 1/2 x 16 7/32"	70 - 100 psi	200 - 300 nails

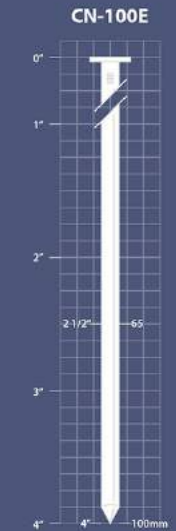

## Coil Nailers

Industrial Coil Nailer



### CN-100EPAL

#### Features

- Ergonomic Design, Well Balanced
- Powerful, Rapid Nailing Performance
- Removable Auxiliary Side Handle
- Body Protectors Equipped

#### Fasteners

- 15° Flat Wire Collated Nails
- Length: 2 1/2 - 3 1/2" (65 - 90 mm)
- Head Diameter: .322" (8.2 mm)
- Shank Diameter: .134" (3.4 mm) Shank: Ring

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.6 kgs	251 x 117 x 282mm	5 - 7 kg/cm <sup>2</sup>	wire 250 - 400
7.93 lbs	9.9 x 4.6 x 11.1"	70 - 100 psi	plastic sheet 200

CN-100EPAL



## Coil Nailers

Industrial Coil Nailer



### CN-50P

#### Features

- Accepts Both Wire & Plastic Sheet Collated Nails
- Powerful Motor with Minimum Recoil
- Tool-Free Depth Adjustment
- Light-Weight Only 1.6 kg (3.5 lbs)
- Clear Magazine Cover to See Nail Quantity
- Removable No-Mar Rubber Pad with Holder in Magazine
- Tool-Free Selectable Trigger - Change from Single Sequential to Bump Fire within A Second

#### Fasteners

- 15° Wire Or Plastic Sheet Collated Nails
- Length: Wire Collated: 1-1/8 - 2" (27 - 50mm)  
Plastic Collated: 1 - 2" (25 - 50mm)
- Shank Diameter: Wire Collated: .072 - .083" (1.8-2.1mm)  
Plastic Collated: .063 - .083" (1.6-2.1mm)
- Shank Type: Smooth, Screw & Ring


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.6 kgs	251 x 117 x 282mm	5 - 7 kg/cm <sup>2</sup>	wire 250 - 400
3.5 lbs	9.9 x 4.6 x 11.1"	70 - 100 psi	plastic sheet 200

CN-50P

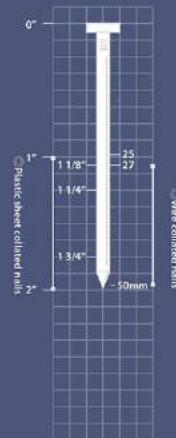

## Coil Nailers

Industrial Coil Nailer



### CN-565A

#### Features

- Accepts Both Wire & Plastic Sheet Collated Nails
- Powerful Motor Drives 250 to 400 Nails
- Continuously
- Tool Free Depth Adjustment
- Anti-Double Fire Trigger Institution

#### Fasteners

- 15° Wire & Plastic Sheet Collated Nails
- Length: Wire: 1 3/4 - 2 1/2" (45 - 65mm)  
Plastic Sheet: 1 1/4 - 2 1/2" (32 - 65mm)
- Ø .090 - .099" (2.3 - 2.5mm)


#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.68 kgs	280 x 130 x 320mm	5 - 7 kg/cm <sup>2</sup>	wire 250 - 400
5.9 lbs	11 x 5 x 12.6"	70 - 100 psi	plastic sheet 200

#### Applications



CN-565A

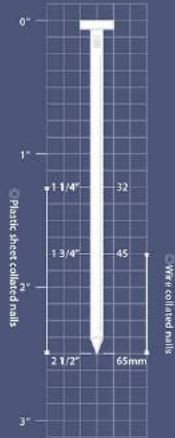

## Coil Nailers

Industrial Coil Nailer



### RN-45E2

#### Features

- Ergonomic Design, Well Balanced
- Low Noise Low Vibration, Less Fatigue
- See-Thru Side Loading Magazine
- Sequential Trigger Available
- 360° Adjustable Exhaust Port
- Body Protectors Equipped
- Rapid Nailing Performance
- Carbide Insert in Safety Tip for Increased Wear
- Resistance Against Tar Paper
- Tool-Free Depth Adjustment
- Integrated Magnet in Nose to Hold The Last Nail
- Durable Metal Shingle Guide
- Nice Belt Hook

#### Fasteners

- Length: 7/8 - 1 3/4" (22 - 45mm)
- Shank Diameter: .120" (3.05mm)


#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.6 kgs	269 x 118 x 283mm	5 - 7 kg/cm <sup>2</sup>	120 nails
5.7 lbs	10 5/8 x 4 5/8 x 11 1/8"	70 - 100 psi	120 nails

#### Applications



RN-45E2

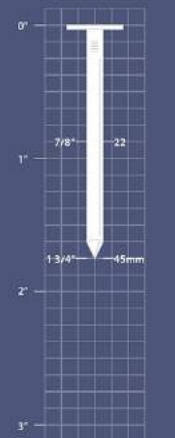

## Framing Nailers

21 Degree Strip Framing Nailer

### AN9021-1



#### Features

- Aggressive Toe-Nailing Teeth for slip-free Grip when Fastening
- Depth-of-Drive Adjustment
- Special Design No-Mar Rubber Pad
- Dedicated Sequential or Bumper or Anti-Double Fire Trigger for Enhanced safety and Durability
- Optional Hanger

#### Fasteners

- 21° Full Head Plastic Collated Strip Nails
- Ø .113 - .161" / 2.87 - 3.3mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.7 kgs	442 x 124 x 331mm	5 - 7 kg/cm <sup>2</sup>	60 nails
8 lbs	17.4 x 4.88 x 13.03"	70 - 100 psi	60 nails

AN9021-1

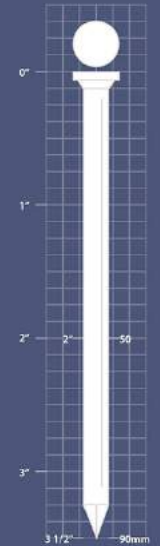

## Framing Nailers

34 Degree Strip Framing Nailer

### L3490



#### Features

- 360° Adjustable Air Deflector
- Depth-of-Drive Adjustment
- Toe-Nailing Teeth for Slip-Free Grip
- No-Mar Rubber Pad
- Sequential Fire Trigger Available (#30805301A)
- Dry-Fire Lock

#### Fasteners

- 34° D Head Paper Tape Collated Strip Nails
- Ø .113 - .161" / 2.87 - 4.1mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.65 kgs	465 x 115 x 370mm	5 - 7 kg/cm <sup>2</sup>	75 - 90 nails
8 lbs	18.3 x 4.5 x 14.6"	70 - 100 psi	75 - 90 nails

L3490

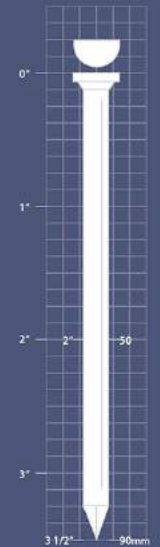

Framing Nailers p15-18



## Framing Nailers

34 Degree Strip Framing Nailer

### AN9034-1



#### Features

- Aggressive Toe-Nailing Teeth for slip-free Grip when Fastening
- Depth-of-Drive Adjustment
- Special Design No-Mar Rubber Pad
- Dedicated Sequential trigger or Bumper trigger or Anti-Double fire trigger for Enhanced safety
- Optional Hanger

#### Fasteners

- 34° D Head Paper Tape Collated Strip Nails
- Ø .113 - .130" / 2.87 - 3.3mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.5 kgs	450 x 150 x 350mm	5 - 7 kg/cm <sup>2</sup>	75 nails
7.72 lbs	17.72 x 5.9 x 13.78"	70 - 100 psi	75 nails

AN9034-1



## Framing Nailers

34 Degree Strip Framing Nailer

### AN-10034E



#### Features

- 360° Adjustable Exhaust Deflector
- Depth-of-Drive Adjustment
- Aggressive Toe-Nailing Teeth for Slip-Free Grip when Fastening
- Removable No-Mar Rubber Tip
- Dedicated Sequential or Bump Fire Trigger - for Enhanced Safety and Durability
- Top Load Magazine
- Dry-Fire Lock

#### Fasteners

- 34° Head Paper Tape Collated Strip Nails
- Ø .113 - .161" / 2.87 - 4.1mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.64 kgs	495 x 117 x 376mm	5 - 7 kg/cm <sup>2</sup>	60 nails
8 lbs	19.5 x 4.6 x 14.8"	70 - 100 psi	60 nails

AN-10034E



## Framing Nailers

21 Degree Strip Framing Nailer

### AN-10021E



#### Features

- 360° Adjustable Exhaust Deflector
- Depth-of-Drive Adjustment
- Aggressive Toe-Nailing Teeth for Slip-Free Grip when Fastening
- Removable No-Mar Rubber Tip
- Dedicated Sequential or Bump Fire Trigger - for Enhanced Safety and Durability
- Top Load Magazine
- Dry-Fire Lock

#### Fasteners

- 21° Plastic Collated Round Head Nails
- Ø .113 - .161" / 2.87 - 4.1mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.64 kgs	495 x 117 x 376mm	5 - 7 kg/cm <sup>2</sup>	60 nails
8 lbs	19.5 x 4.6 x 14.8"	70 - 100 psi	60 nails

AN-10021E



## Framing Nailers

34 Degree Strip Framing Nailer

### AN-10034-1



#### Features

- Depth-of-Drive Adjustment
- Aggressive Toe-Nailing Teeth for Slip-Free Grip when Fastening
- Special Design No-Mar Rubber Pad for better working performance
- Dedicated Sequential or Bump Fire Trigger - for Enhanced Safety and Durability
- Light Weight and Well Balance
- Optional Hanger

#### Fasteners

- 34° Round/D Head Paper Tape Collated Strip Nails
- Ø .113 - .130" / 2.87 - 3.3mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.43 kgs	354 x 153 x 443mm	5 - 7 kg/cm <sup>2</sup>	75 nails
7.5 lbs	14.2" x 6.1" x 17.7"	70 - 100 psi	75 nails

AN-10034-1



## Framing Nailers

21 Degree Strip Nailer

### AN-13021E



#### Features

- 360° Adjustable Exhaust Deflector with Noise Reducer
- Depth-of-Drive Adjustable
- Aggressive Toe-Nailing Teeth for Slip-Free Grip when Fastening
- Soft Rubber Grip for Added Comfort and Less Fatigue
- Well Balanced
- Sequential Fire Trigger
- Dry-Fire Lock

#### Fasteners

- 21° Full Head Plastic Collated Strip Nails
- Ø .131 - .165" / 3.33 - 4.19mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
5.4 kgs	452 x 188 x 588mm	6 - 8 kg/cm <sup>2</sup>	50 nails
11.88 lbs	17.8 x 7.4 x 23.1"	85 - 120 psi	50 nails

AN-13021E

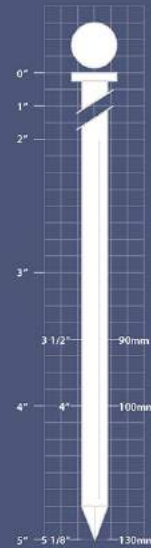

## Framing Nailers

21 Degree Strip Nailer

### AN-16021E



#### Features

- Front Exhaust Top Cap
- Depth-of-Drive Adjustable
- Well Balanced
- Sequential Fire Trigger

#### Fasteners

- 21° Full Head Plastic Collated Strip Nails
- Ø .149 - .181" / 3.8 - 4.6mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
7.0 kgs	532 x 150 x 557mm	6 - 8 kg/cm <sup>2</sup>	56 nails
15.4 lbs	20.9 x 5.9 x 21.9"	85 - 120 psi	56 nails

AN-16021E



Finish Nailers p 20-27

## Micro Pinner

23 GA Micro Pinner



### PT-630

#### Features

- Patented Adjustment-Free side loading magazine
- Double trigger
- Accepts both headless and mini head pins

#### Fasteners

- 23 GA Headless and Mini Head Pins
- Length: 12 - 30mm / 1/2 - 1 3/16"
- Shank Diameter: 0.64mm / .025"

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	196 x 42 x 182mm	5 - 7 kg/cm <sup>2</sup>	100 nails
2.64 lbs	7.7" x 1.6" x 7.2"	70 - 100 psi	100 nails

### PT-630



## Brad Nailers

21 GA Mini Brad Nailer



### LMF-40LAC

#### Features

- 360° Adjustable Air Deflector
- No-Mar Rubber Pad Available
- Long Slim Nose for Precision Trimming

#### Fasteners

- 21 Gauge Mini Brads
- Ø .033" / 0.84mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.30 kgs	231 x 58 x 218mm	5 - 7 kg/cm <sup>2</sup>	100 nails
2.86 lbs	9.1 x 2.3 x 8.6"	70 - 100 psi	100 nails

### LMF-40LAC



## Micro Pinner

23 GA Micro Pinner



### PT-635

#### Features

- Extended Trigger for Rapid Applications
- Trigger Lock for Increased Safety
- Patented Adjustment - Free Side Loading Magazine
- Accepts Both Headless and Mini Head Pins
- Removable No-Mar Rubber Pad
- Durable Aluminum Magazine
- Rear Exhaust to Avoid Stains on Work Piece
- Full Wrap-Around Rubber Grip for Maximum Comfort
- Slim Tapered Nose for Precise Nail Placement

#### Fasteners

- 23 GA Headless and Mini Head Pins
- Length: 12 - 35mm / 1/2 - 1 3/8"
- Shank Diameter: 0.64mm / .025"

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.96 kgs	205 x 43 x 174mm	5 - 7 kg/cm <sup>2</sup>	120 pcs
2.1 lbs	8.07 x 1.69 x 6.85"	70 - 100 psi	120 pcs

### PT-635



## Brad Nailers

18 GA Brad Nailer



### LNF-32AC

#### Features

- 360° Adjustable Air Deflector
- Quick Release Nose Cover
- Optional Single-Bump Fire Switch Available
- No-Mar Rubber Pad Available (#22903801)

#### Fasteners

- 18 Gauge Brads
- Ø .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.17 kgs	243 x 58 x 204mm	5 - 7 kg/cm <sup>2</sup>	100 brads
2.57 lbs	9.6 x 2.3 x 8.0"	70 - 100 psi	100 brads

### LNF-32AC



## Brad Nailers

18 GA Brad Nailer



### LNF-50AC

#### Features

- 360° Adjustable Air Deflector
- Quick Release Nose Cover
- Optional Single-Bump Fire Switch Available
- No-Mar Rubber Pad Available (#22903801)

#### Fasteners

- 18 Gauge Brads
- $\varnothing$ .050 x .040" / 1.25 x 1.0mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.4 kgs	243 x 58 x 248mm	5 - 7 kg/cm <sup>2</sup>	100 nails
3.08 lbs	9.6 x 2.3 x 9.8"	70 - 100 psi	100 nails

LNF-50AC



## Brad Nailers

2-in-1 Combination Tool



### LU-50FAC

#### Features

- 360° Adjustable Air Deflector
- Visual Reload Indicator
- Single-Bump Fire Switch
- Depth Adjustment
- No-Mar Tip
- Bottom Load

#### Fasteners

- 90 Series Staples & 18 Gauge Brads
- Staples Compatible with Atrio 90, BeA 90, Duo-Fast 1800, Hitachi 11100, Haubold 6000, ISM 90, JK 781 & Senco L Series
- $\varnothing$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.45 kgs	223 x 58 x 226mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3.19 lbs	8.8 x 2.3 x 10.3"	70 - 100 psi	100 staples

LU-50FAC

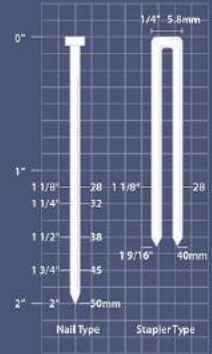

## Brad Nailers

18 GA Angle Brad Nailer



### LNF-50AC-1

#### Features

- 360° Adjustable Air Deflector
- Quick Release Nose Cover
- Optional Single-Bump Fire Switch Available No-Mar Rubber Pad Available (#22903801)
- One Hand Operation

#### Fasteners

- 18 Gauge 25° Angle Brads
- $\varnothing$ .050 x .040" / 1.25 x 1.0mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.4 kgs	243 x 58 x 248mm	5 - 7 kg/cm <sup>2</sup>	100 nails
3.08 lbs	9.6 x 2.3 x 9.8"	70 - 100 psi	100 nails

LNF-50AC-1



## Brad Nailers

15 / 16 GA Finish Nailer, Light Duty



### LT-50LAC

#### Features

- Accept Three Types of Fasteners without Any Adjustment
- 360° Rotatable Air Deflector
- Light and Compact, Ideal for Soft Wood Trimming and Fixation of Wood to Concrete
- Well Balanced with Comfortable Rubber Grip
- Removable No-Mar Rubber Pad (#22903801)
- Durable Aluminium Magazine
- LT-50LLAC with Long Magazine for 2 Strips of 16 GA Finish Brads Available

#### Fasteners

- 15 GA Finish Nails:  $\varnothing$ .069" / 1.75mm
- 16 GA Finish Nails:  $\varnothing$ .063 x .055" / 1.6 x 1.4mm
- 15 GA  $\varnothing$  1.83 Concrete Nails:  $\varnothing$  .072" / 1.83mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.4 kgs	250 x 58 x 250mm	5 - 7 kg/cm <sup>2</sup>	80 nails
3.08 lbs	9.8 x 2.3 x 9.8"	70 - 100 psi	80 nails

LT-50LAC



## Finish Nailers

15 / 16 GA Finish Nailer & Concrete Nailer, Light Duty



### LT-50LLAC

#### Features

- Accepts Both 16 GA Finish Nails & .072" (1.83 mm) Concrete Nails
- 360° Adjustable Air Deflector
- Light Weight
- Well Balanced
- No-Mar Rubber Pad Available (#22903801)
- Long Magazine
- Holds 2 Strips of 16 GA Finish Nails

#### Fasteners

- 15 GA Finish Nails:  $\varnothing$ .069" / 1.75mm
- 16 GA Finish Nails:  $\varnothing$ .063 x.055" / 1.6 x1.4mm
- 15 GA  $\varnothing$  1.83 Concrete Nails:  $\varnothing$ .072" / 1.83mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.4 kgs	250 x 58 x 250mm	5 - 7 kg/cm <sup>2</sup>	80 - 100 nails
3.08 lbs	9.8 x 2.3 x 9.8"	70 - 100 psi	80 - 100 nails

LT-50LLAC



## Finish Nailers

15/16 GA Finish Nailer



### LT-1650AC

#### Features

- Accept 15/16GA Finish Nails
- 360° Adjustable Air Deflector
- Quick Release Nose Cover
- Well Balanced
- No-Mar Rubber Pad Available (#21903602)

#### Fasteners

- 15 GA Finish Nails:  $\varnothing$ .069" / 1.75mm
- 16 GA Finish Nails:  $\varnothing$ .063 x.055" / 1.6 x1.4mm
- 15 GA  $\varnothing$  1.83 Concrete Nails:  $\varnothing$ .072" / 1.83mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.8 kgs	272 x 72 x 281mm	5 - 7 kg/cm <sup>2</sup>	100 nails
3.96 lbs	10.7 x 2.8 x 11.1"	70 - 100 psi	100 nails

LT-1650AC



## Finish Nailers

15 / 16 GA Finish Nailer & Concrete Nailer, Heavy Duty



### LT-1650

#### Features

- Accept 15,16 GA Finish Nails & 1.83mm Concrete Pins
- 360° Adjustable Air Deflector
- Bolted Release Nose Cover
- Well Balanced - Powerful Motor
- No Mar Rubber Pad

#### Fasteners

- 15 GA Finish Nails:  $\varnothing$ .069" / 1.75mm
- 16 GA Finish Nails:  $\varnothing$ .063 x.055" / 1.6 x1.4mm
- 15 GA  $\varnothing$  1.83 Concrete Nails:  $\varnothing$ .072" / 1.83mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.15 kgs	281 x 72 x 272mm	5 - 7 kg/cm <sup>2</sup>	100 nails
4.73 lbs	11.06 x 2.83 x 10.7"	70 - 100 psi	100 nails

LT-1650



## Finish Nailers

16 GA Finish Nailer



### LT-1664EB

#### Features

- 360° Rotatable Air Deflector
- Rear Load, Durable Aluminum Magazine
- Tool-Free Quick Release Nose Cover for Easy Jam Removal
- Tool-Free Depth-of-Drive Adjustment
- Removable No-Mar Rubber Pad
- Dry-Fire Lock

#### Fasteners

- 16 GA Finish Nails
- $\varnothing$ .063 x .055" / 1.6x1.4mm
- Length: 1 - 2 1/2" / 25 - 64mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.14 kgs	360 x 85 x 310mm	5 - 7 kg/cm <sup>2</sup>	100 nails
4.7 lbs	14.2 x 3.3 x 12.2"	70 - 100 psi	100 nails

LT-1664EB



## Finish Nailers

DA Series Angle Finish Nailer



### DA-64E-1

#### Features

- 360° Rotatable Air Deflector
- Rear Load, Durable Aluminum Magazine
- Tool-Free Quick Release Nose Cover for Easy Jam Removal
- Tool-Free Depth-of-Drive Adjustment
- Removable No-Mar Rubber Pad
- In-Line Magazine

#### Fasteners

- 15 Gauge Angle Finish Nails
- Compatible with Senco DA Series
- Ø .069" / 1.7mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.14 kgs	331 x 104 x 326mm	5 - 7 kg/cm <sup>2</sup>	100 nails
4.7 lbs	13.03 x 4.09 x 12.83"	70 - 100 psi	100 nails

DA-64E-1



## Concrete Nailer

14 GA Concrete Nailer, Heavy Duty



### LHT-64

#### Features

- Accept Both .086 & .098" / 2.2 & 2.5mm Concrete Nails
- 360° Adjustable Air Deflector
- Powerful
- Well Balanced
- Quick Release Bolted Nose
- Sequential Trigger Mode, Can be Adjusted to Bump Fire Mode without Changing Parts.

#### Fasteners

- Concrete Nails
- Ø .086 & .098" / 2.2 & 2.5mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.7 kgs	282 x 94 x 306mm	5 - 7 kg/cm <sup>2</sup>	80 nails
5.94 lbs	11.1 x 3.7 x 12.5"	70 - 100 psi	80 nails

LHT-64



## Concrete Nailer

14 GA Concrete Nailer



### LT-1464

#### Features

- Accept Both .086 & .098" / 2.2 & 2.5mm Concrete Nails
- 360° Adjustable Air Deflector
- Bolted Release Nose Cover
- Well Balanced - Powerful Motor
- No Mark Rubber Pad
- Straight Loop Safety Also Available

#### Fasteners

- Concrete Nails
- Ø .086 & .098" / 2.2 & 2.5mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.9 kgs	272 x 72 x 281mm	5 - 7 kg/cm <sup>2</sup>	80 nails
4.19 lbs	10.7 x 2.83 x 10.7"	70 - 100 psi	80 nails

LT-1464



## Concrete Nailer

Concrete Nailer



### ASD-3040

#### Features

- Ergonomic Design, Well Balanced
- Powerful
- Quick Release Bolted Nose Air Deflector Sequential Trigger
- Depth-of-Drive Adjustable
- Quick Release wheel easy access for clearing Jams

#### Fasteners

- Concrete Nails
- Ø .104" ~ .118" / 2.6 ~ 3.0mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.6 kgs	345 x 121 x 347mm	6 - 8 kg/cm <sup>2</sup>	30 nails
7.92 lbs	13.6 x 4.76 x 13.67"	70 - 110 psi	30 nails

ASD-3040





Staplers p.29-55

## Staplers

SJK Series Fine Wire Stapler



### LU-SJK16F

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Extended Trigger for Rapid Stapling
- Double Trigger for Increased Safety
- Full Wrap-Around Rubber Grip

#### Fasteners

- SJK Series Staples
- Compatible with Omer SJK, Bostitch SJ3020, Senco TK Series
- 21.030 x .023" / 0.76 x 0.58mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144mm	4 - 7 kg/cm <sup>2</sup>	167 staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	167 staples

### LU-SJK16F



## Staplers

71 Series Fine Wire Stapler



### LU-7116F

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Extended Trigger for Rapid Stapling
- Double Trigger for Increased Safety
- Full Wrap-Around Rubber Grip

#### Fasteners

- 71 Series Staples
- Compatible with Complete 71, Atr 7, BeA 71, JK 670, Haubold 7100, Senco C Series
- 21.030 x .024" / 0.75 x 0.61mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144mm	4 - 7 kg/cm <sup>2</sup>	178 staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	178 staples

### LU-7116F

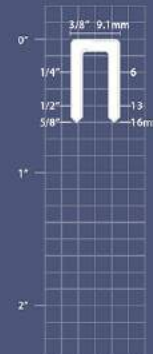

## Staplers

71 Series Fine Wire Stapler



### LU-7116AC

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Double Trigger for Increased Safety
- Comfortable Rubber Grip

#### Fasteners

- 71 Series Staples
- Compatible with Complete 71, Atrio 7, BeA 71, JK 670, Haubold 7100, Senco C Series
- $\square$ .030 x .024" / 0.75 x 0.61mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-7116AC



## Staplers

71 Series Auto-Fire Staplers



### LU-7116.1AUTO

#### Features

- New & Improved
- Speed Adjustable. Minimum 27 Staples/Sec when Adjusted to Highest Speed.
- Light Squeeze Trigger to Single Fire, Full Squeeze to Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Long Magazine – Quick Load and Easy Jam Clearance
- Low Fastener Re-Load Indicator Window

#### Fasteners

- 71 Series
- Compatible With Complete 71, Atrio 7, BeA 71, Haubold 7100, JK 670, Senco C Series
- $\square$ .030 x .024" / 0.75 x 0.61mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1 kgs	220 x 45 x 148mm	6 - 7.7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.8 x 5.8"	85 - 110 psi	100 staples

LU-7116.1AUTO



## Staplers

71 Series Fine Wire Stapler, Long Nose



### LU-7116LAC

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust Cover
- Slim Long Nose for Easy Aiming

#### Fasteners

- 71 Series Staples
- Compatible With Complete 71, Atrio 7, BeA 71, Haubold 7100, JK 670, Senco C Series
- $\square$ .030 x .024" / 0.75 x 0.61mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1 kgs	220 x 43 x 215mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.4 lbs	8.7 x 1.7 x 8.5"	70 - 100 psi	100 staples

LU-7116LAC



## Staplers

71 Series Auto-Fire Staplers, Long Magazine



### LU-7116.1AUTO/LM

#### Features

- New & Improved
- Speed Adjustable. Minimum 27 Staples/Sec when Adjusted to Highest Speed.
- Light Squeeze Trigger to Single Fire, Full Squeeze to Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Long Magazine – Quick Load and Easy Jam Clearance
- Low Fastener Re-Load Indicator Window

#### Fasteners

- 71 Series Staples
- Compatible With Complete 71, Atrio 7, BeA 71, Haubold 7100, JK 670, Senco C Series
- $\square$ .030 x .024" / 0.75 x 0.61mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1 kgs	352 x 45 x 148mm	6 - 7.7 kg/cm <sup>2</sup>	358 staples
2.4 lbs	13.8 x 1.8 x 5.8"	85 - 110 psi	358 staples

LU-7116.1AUTO/LM





## Staplers

14 Series Fine Wire Stapler



### LU-1416AC

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust Cover

#### Fasteners

- 14 Series Compatible with Haubold 1400, JK KL1400, Fasco 14, Omer 68, Prebena VF, Spotnails 1400 Series
- $\square$  .030 x .024" / 0.75 x 0.61mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-1416AC

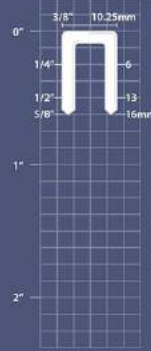

## Staplers

97 Series Fine Wire Stapler



### LU-9716F

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Extended Trigger for Rapid Stapling
- Double Trigger for Increased Safety
- Full Wrap-Around Rubber Grip

#### Fasteners

- 97 Series Staplers
- Compatible with Omer 4097, Haubold 4000, BeA 97, Senco W Series
- $\square$  .036 x .028" / 0.92 x 0.70mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144mm	4 - 7 kg/cm <sup>2</sup>	125 staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	125 staples

LU-9716F



## Staplers

23 Series Fine Wire Stapler



### LU-2316F

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Extended Trigger for Rapid Stapling
- Double Trigger for Increased Safety
- Full Wrap-Around Rubber Grip

#### Fasteners

- 23 Series Staplers
- Compatible with Omer 62, Senco B, Bostitch SB3020, Prebena M, Fasco SR3 Series
- $\square$  .030 x .020" / 0.75 x 0.50mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144mm	4 - 7 kg/cm <sup>2</sup>	167 staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	167 staples

LU-2316F



## Staplers

97 Series Fire Wire Stapler



### LU-9725AC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 97 Series Staplers
- Compatible with Omer 4097, Haubold 4000, BeA 97, Senco W Series
- $\square$  .036 x .028" / 0.92 x 0.70mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-9725AC



## Staplers

84 Series Fine Wire Stapler



### LU-8416AC

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Double Trigger for Increased Safety
- Comfortable Rubber Grip

#### Fasteners

- 84 Series Staples
- Compatible with Atro 84, Bostitch 84, BeA SBNK, Prebena AD
- $\square$  .038 x .026" / 0.95 x 0.65mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-8416AC



## Staplers

80 Series Fine Wire Stapler



### LU-8016F

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Extended Trigger for Rapid Stapling
- Double Trigger for Increased Safety
- Full Wrap-Around Rubber Grip

#### Fasteners

- 80 Series Staples
- Compatible with Complete 80, Atro 8, BeA 80, JK 680, Haubold 800 Series
- $\square$  .036 x .028" / 0.91 x 0.71mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144mm	4 - 7 kg/cm <sup>2</sup>	140 staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	140 staples

LU-8016F



## Staplers

80 Series Fine Wire Stapler

### LU-8016AC.1



#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Double Trigger for Increased Safety
- Comfortable Rubber Grip

#### Fasteners

- 80 Series Staples
- Compatible with Complete 80, Atro 8, BeA 80, JK 680, Haubold 800 Series
- $\square$  .036 x .028" / 0.91 x 0.71mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-8016AC.1

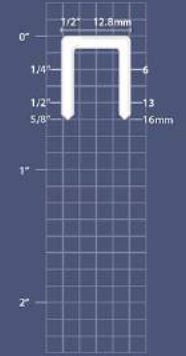

## Staplers

80 Series Auto-Fire Staplers



### LU-8016.1AUTO

#### Features

- New & Improved
- Speed Adjustable. Minimum 27 Staples / Sec when Adjusted to Highest Speed
- Light Squeeze Trigger to Single Fire, Full Squeeze to Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Magazine – Quick Load & Easy Jam Clearance

#### Fasteners

- 80 Series Staples
- Compatible with Complete 80, Atrio 8, BeA 80, JK680, Haubold 800 Series
- $\varnothing$ .036 x .028" / 0.91 x 0.71mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1 kgs	220 x 45 x 148mm	6 - 7.7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.8 x 5.8"	85 - 110 psi	100 staples

LU-8016.1AUTO



## Staplers

80 Series Fine Wire Stapler



### LU-8025AC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 80 Series Staples
- Compatible with Complete 80, Atrio 8, BeA 80, JK 680, Haubold 800 Series
- $\varnothing$ .036 x .028" / 0.91 x 0.71mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-8025AC



## Staplers

80 Series Auto-Fire Staplers, Long Magazine



### LU-8016.1AUTO/LM

#### Features

- New & Improved
- Speed Adjustable. Minimum 27 Staples / Sec when Adjusted to Highest Speed
- Light Squeeze Trigger to Single Fire, Full Squeeze to Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Long Magazine – Quick Load and Easy Jam Clearance
- Low Fastener Re-Load Indicator Window

#### Fasteners

- 80 Series Staples
- Compatible with Complete 80, Atrio 8, BeA 80, JK 680, Haubold 800 Series
- $\varnothing$ .036 x .028" / 0.91 x 0.71mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1 kgs	352 x 45 x 148mm	6 - 7.7 kg/cm <sup>2</sup>	290 staples
2.4 lbs	13.8 x 1.8 x 5.8"	85 - 110 psi	290 staples

LU-8016.1AUTO/LM



## Staplers

4J Series Stapler



### LU-425JAC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 20 Gauge Staples
- Compatible with Max 4J Series
- $\varnothing$ .047 x .024" / 1.2 x 0.6mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-425JAC



## Staplers

10F Series Fine Wire stapler



### LU-1010FAC

#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Comfortable Rubber Grip

#### Fasteners

- 22 Gauge Staples
- 10F Series Staples
- $\square$ .029 x .020" / 0.75 x 0.52mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-1010FAC



## Staplers

10J Series Fine Wire Stapler



### LU-1013JAC


#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Comfortable Rubber Grip

#### Fasteners

- 20 Gauge Staples
- Compatible with Max 10J
- $\square$ .047 x .024" / 1.2 x 0.6mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-1013JAC



## Staplers

10F Series Fine Wire stapler



### LU-1016F

#### Features

- Hammer
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Extended Trigger for Rapid Stapling
- Double Trigger for the Increased Safety
- Full Wrap-Around Rubber Grip

#### Fasteners

- 22 Gauge Staples
- 10F Series Staples
- $\square$ .029 x .020" / 0.75 x 0.52mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-1016F



## Staplers

10J Series Fine Wire stapler



### LU-1016J

#### Features

- Hammer
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Extended Trigger for Rapid Stapling
- Double Trigger for the Increased Safety
- Full Wrap-Around Rubber Grip

#### Fasteners

- 20 Gauge Staples
- Compatible with Max 10J
- $\square$ .047 x .024" / 1.20 x 0.60mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

LU-1016J



## Staplers

MAX 10 Series Auto-Fire Staplers

### LU-1016AUTO



#### Features

- New & Improved
- Speed Adjustable Minimum 27 Staples/ Sec when Adjusted to Highest Speed.
- Light Squeeze Trigger to Single Fire, Full Squeeze to Auto-Fire No Adjustment Needed.
- Hammer Cap
- Rear Exhaust
- Bottom Load, Jam Free Magazine
- Comfortable Rubber Grip

#### Fasteners

- 20 Gauge Staples - Compatible with Max 10J
- 22 Gauge Staples - Compatible with Max 10F


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

### LU-1016AUTO



20GA  $\square$  .047 x .024"  
1.2 x 0.6mm

### LU-1016AUTO J Series

22GA  $\square$  .029 x .020"  
0.75 x 0.52mm

### LU-1016AUTO F Series

## Staplers

10J Series Stapler

### LU-1025JAC



#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 20 Gauge Staples
- Compatible with Max 10J Series
- $\square$  .047 x .024" / 1.2 x 0.6mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

### LU-1025JAC



## Staplers

All Series Auto-Fire Staplers,  
Long Magazine

### LU-1116.1AUTO/LM



#### Features

- New & Improved
- Speed Adjustable. Minimum 27 Staples / Sec when Adjusted to Highest Speed.
- Light Squeeze Trigger to Single Fire, Full Squeeze to Auto-Fire No Adjustment Needed
- Hammer Cap
- Rear Exhaust
- Bottom Load Long Magazine – Quick Load and Easy Jam Clearance
- Low Fastener Re-Load Indicator Window

#### Fasteners

- A11 Series
- Compatible with Rapid 140, Arrow T50 Series
- $\square$  .021 x .049" / 0.53 x 1.25mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.1 kgs	352 x 45 x 148mm	6 - 7.7 kg/cm <sup>2</sup>	216 staples
2.4 lbs	13.8 x 1.8 x 5.8"	85 - 110 psi	216 staples

### LU-1116.1AUTO/LM



## Staplers

10J Series Stapler

### LU-1025JAC



#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 20 Gauge Staples
- Compatible with Max 10J Series
- $\square$  .047 x .024" / 1.2 x 0.6mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

### LU-1025JAC



## Staplers

50 Series Fine Wire Stapler

### LU-5018AC



#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust to Avoid Oil Stains on Work Piece
- Slim Long Nose for Easy, Precise Staple Placement
- Double Trigger for Increased Safety
- Comfortable Rubber Grip

#### Fasteners

- 50 Series Staples
- Compatible with Complete 50, Duo-Fast 50, BeA 95, Omer 50, Prebena D
- $\square$  .050 x .020" / 1.27 x 0.50mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.0 kgs	220 x 43 x 163mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.2 lbs	8.7 x 1.7 x 6.4"	70 - 100 psi	100 staples

### LU-5018AC

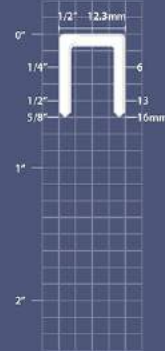

## Staplers

19 GA 64 Series Stapler



### LU-6432

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- Compatible with Duo-Fast 64 Series
- $\square$  .050 x .030" / 1.25 x 0.75mm

#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-6432



## Staplers

18 GA Narrow Crown Stapler



### LU-9025AC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 90 Series
- Compatible with Complete L, BeA 90, Duo-Fast 1800, Senco L Series
- $\square$  .050 x .040" / 1.25 x 1.00 mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199 mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-9025AC



## Staplers

18 GA Narrow Crown Stapler



### LU-9032AC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 90 series staples
- Compatible with Atro 90, BeA 90, Duo-Fast 1800, Hitachi 11100, Haubold 6000, ISM 90, JK 781 & Senco L Series
- $\square$  .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.30 kgs	223 x 58 x 213mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.86 lbs	8.8 x 2.3 x 8.4"	70 - 100 psi	100 staples

LU-9032AC

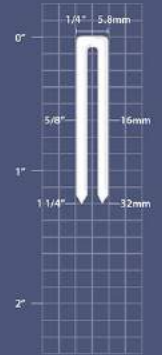

## Staplers

18 GA Narrow Crown Stapler, Light Duty



### LU-9040LAC

#### Features

- 360° Adjustable Air Deflector
- Bottom Load
- Light Weight
- Well Balanced

#### Fasteners

- 90 Series Staples
- Compatible with Atro 90, BeA 90, Duo-Fast 1800, Hitachi 11100, Haubold 6000, ISM 90, JK 781 & Senco L Series
- $\square$  .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 246mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3.03 lbs	8.8 x 2.3 x 9.7"	70 - 100 psi	100 staples

LU-9040LAC

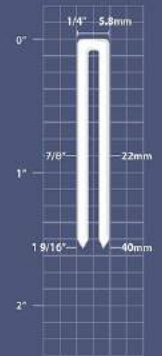

## Staplers

18 GA Narrow Crown Stapler,  
Light Duty



### LU-9040LAD

#### Features

- 360° Adjustable Air Deflector
- Bottom Load
- Light Weight
- Well Balanced
- Tool-Free Depth Adjustment

#### Fasteners

- Compatible with 90 Series : Complete L, BeA 90, Duo-Fast 1800, Senco L Series
- $\square$  .050" x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 246mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3.03 lbs	8.8 x 2.3 x 9.7"	70 - 100 psi	100 staples

LU-9040LAD



## Staplers

18 GA Narrow Crown Stapler,  
Heavy Duty



### LU-9040HAC

#### Features

- Heavy Duty Version for Hardwood Applications
- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger

#### Fasteners

- 90 Series Staples
- Compatible with Atro 90, BeA 90, Duo-Fast 1800, Hitachi 11100, Haubold 6000, ISM 90, JK 781 & Senco L Series
- $\square$  .050" x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.75 kgs	272 x 72 x 271mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3.85 lbs	10.7 x 2.8 x 10.7"	70 - 100 psi	100 staples

LU-9040HAC



## Staplers

18 GA Narrow Crown Stapler,  
Heavy Duty



### LU-9040KT

#### Features

- 360° Adjustable Exhaust
- Top Load Long Magazine for Increased Efficiency, Quick and Easy Re-loading
- Well Balanced and Light Weight
- Powerful Motor with Minimum Recoil for Enhanced Comfort of Use and Productivity
- Tool-Free Quick Release Nose for Jam Removal in Seconds

#### Fasteners

- 18 GA Narrow Crown 90 Series
- Compatible with Complete L, BeA 90, Duo-Fast 1800, Senco L Series
- $\square$  .050" x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	303 x 72 x 256mm	5 - 7 kg/cm <sup>2</sup>	150 staples
2.64 lbs	11.92 x 2.83 x 10.07"	70 - 100 psi	150 staples

LU-9040KT

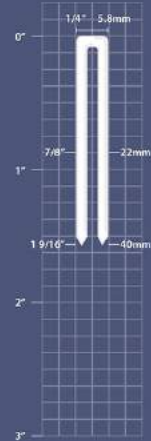

## Staplers

18 GA Medium Crown Stapler



### LU-9225AC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 92 Series Staples
- Compatible with Atro 92, BeA 92, Bostitch SL5035, JK 664, Nikema 92, Prebena H Series
- $\square$  .050" x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-9225AC



## Staplers

18 GA Medium Crown Stapler,  
Light Duty



### LU-9240LAC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 92 Series Staples
- Compatible with Atro 92, BeA 92, Bostitch SL5035, JK 664, Nikema 92, Prebena H Series
- $\square$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 246mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3.03 lbs	8.8 x 2.3 x 9.7"	70 - 100 psi	100 staples

LU-9240LAC



## Staplers

18 GA Medium Crown Stapler



### LU-G25AC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- G Series
- Compatible with Complete M, Duo-Fast W18, JK 782, Omer SG44, Senco M, Prebena G Series
- $\square$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.2 kgs	223 x 58 x 199mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.64 lbs	8.8 x 2.3 x 7.8"	70 - 100 psi	100 staples

LU-G25AC



## Staplers

18 GA Medium Crown Stapler,  
Heavy Duty



### LU-9240HAC

#### Features

- Heavy Duty Version for Hardwood Applications
- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger

#### Fasteners

- 92 Series Staples
- Compatible with Atro 92, BeA 92, Bostitch SL5035, JK 664, Nikema 92, Prebena H Series
- $\square$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.75 kgs	272 x 72 x 271mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3.85 lbs	10.7 x 2.8 x 10.7"	70 - 100 psi	100 staples

LU-9240HAC



## Staplers

18 GA Medium Crown Stapler,  
Long Nose



### LU-G32HAC

#### Features

- 360° Adjustable Air Deflector
- Bottom Load
- Light Weight
- Well Balanced
- With Vinyl Siding Guide
- Long Slim Nose

#### Fasteners

- G Series
- Compatible with Complete M, Duo-Fast W18, JK 782, Omer SG44, Senco M, Prebena G Series
- $\square$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.35 kgs	223 x 58 x 236mm	5 - 7 kg/cm <sup>2</sup>	100 staples
2.97 lbs	8.8 x 2.3 x 9.3"	70 - 100 psi	100 staples

LU-G32HAC





## Staplers

18 GA Medium Crown Stapler



### LU-G40LAC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available
- Vinyl Siding Yoke available (#18303101A)

#### Fasteners

- G Series
- Compatible with Complete M, Duo-Fast W18, JK 782, Omer SG44, Senco M, Prebena G Series
- $\square$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 249mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3 lbs	8.8 x 2.3 x 9.8"	70 - 100 psi	100 staples

LU-G40LAC

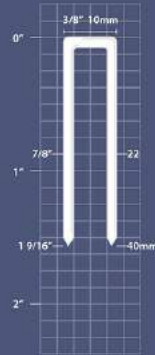

## Staplers

18 GA Wide Crown Stapler



### LU-9438AC

#### Features

- 360° Rotatable Air Deflector
- Bottom Load, Durable Aluminum Magazine
- Comfortable Rubber Grip
- Bump Fire Trigger
- Sequential Trigger Valve Available
- Belt Hook Available

#### Fasteners

- 94 series staples
- Compatible with Omer 94, Atrio 94, BeA 94, Bostitch 94, Prebena HB Series
- $\square$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 249mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3 lbs	8.8 x 2.3 x 9.8"	70 - 100 psi	100 staples

LU-9438AC

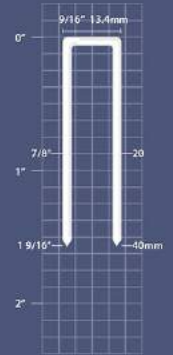

## Staplers

18 GA Wide Crown Stapler



### LU-50040LAC

#### Features

- 360° Adjustable Air Deflector
- Bottom Load
- Light Weight
- Well Balanced
- Vinyl Siding Yoke Available (#18303101A)

#### Fasteners

- 500 Series
- Compatible with Haubold 500 Series Staples
- $\square$ .050 x .040" / 1.25 x 1.0mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.38 kgs	223 x 58 x 249mm	5 - 7 kg/cm <sup>2</sup>	100 staples
3.03 lbs	8.8 x 2.3 x 9.8"	70 - 100 psi	100 staples

LU-50040LAC

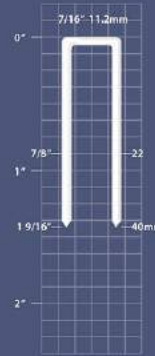

## Staplers

16 GA Medium Crown Stapler



### LU-851LC1

#### Features

- Lightweight and Well-Balanced to Reduce Fatigue and Increased Handling
- Tool-Free Depth of Drive Adjustment
- Robust Metal 360° Adjustable Exhaust
- Extended Two Finger Trigger
- Dedicated Bump Fire (Orange) or Full Sequential Trigger (Black) Available
- Tool-Free Quick-Release Nose for Jam Clearance
- Robust Light Engineered Polymer Magazine with Stainless Rail Top for Increased Durability
- Top Load Long Magazine - Quick Loading
- Open Magazine for Viewing Fastener Quantity
- Protected Pusher Spring
- Slim Long Nose for Easy Line of Sight & Easy Access to Tight Spots
- Increased Bumper Life = Less Downtime and Service Cost


#### Fasteners

- 16 GA - Compatible with Complete N, BeA 16(155), Senco N, Haubold KG 700, Duo-Fast 7600
- 17 GA - Compatible with Senco O Series

#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.18 kgs	377 x 72 x 276mm	6 - 8 kg/cm <sup>2</sup>	140 staples
4.8 lbs	14 7/8 x 2 7/8 x 10 7/8"	70 - 110 psi	140 staples

LU-851LC1/16GA  
LU-851LC1/17GA

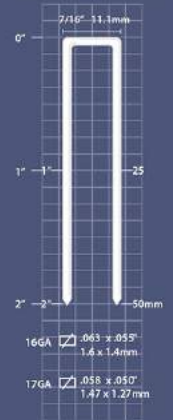

## Staplers

16 GA Medium Crown Stapler



### LU-851F2

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Metal Exhaust
- Heavy Duty, Well Balanced
- Depth Adjustment
- Dedicated Bump Fire Trigger
- Sequential Trigger Available (#25205301A)
- Top Load Long Magazine

#### Fasteners

- Compatible with Hitachi 11200, Omer M2, Senco N Series
- .063 x .055" / 1.6 x 1.4mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.9 kgs	343 x 97 x 307mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.5 lbs	13.5 x 3.8 x 12.1"	85 - 110 psi	140 staples

LU-851F2

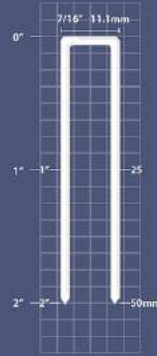

## Staplers

16 GA Medium Crown Stapler



### LU-851KGF2

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Air Deflector
- Heavy Duty, Well Balanced
- Sequential Fire Trigger Available (#25205301A)

#### Fasteners

- Compatible with Duo-Fast 7600, Haubold KG 700, Omer 700 Series
- .063 x 0.55" / 1.6 x 1.4mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.9 kgs	343 x 97 x 307mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.5 lbs	13.5 x 3.8 x 12.1"	85 - 110 psi	140 staples

LU-851KGF2

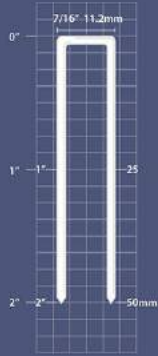

## Staplers

16 GA Medium Crown Stapler



### LU-864F

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Air Deflector
- Heavy Duty, Well Balanced
- Sequential Fire Trigger Available (#25205301A)

#### Fasteners

- Compatible with Hitachi 11200, Omer M2, Senco N Series
- .063 x .055" / 1.6 x 1.4mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.9 kgs	343 x 97 x 307mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.5 lbs	13.5 x 3.8 x 12.1"	85 - 110 psi	140 staples

LU-864F

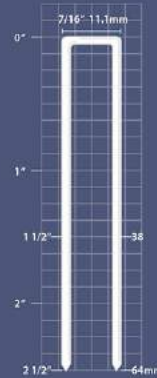

## Staplers

16 GA Medium Crown Stapler



### LU-864KGF

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Air Deflector
- Heavy Duty, Well Balanced
- Sequential Fire Trigger Available (#25205301A)

#### Fasteners

- Compatible with Duo-Fast 7600, Haubold KG 700, Omer 700 Series
- .063 x .055" / 1.6 x 1.4mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.9 kgs	343 x 97 x 307mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.5 lbs	13.5 x 3.8 x 12.1"	85 - 110 psi	140 staples

LU-864KGF

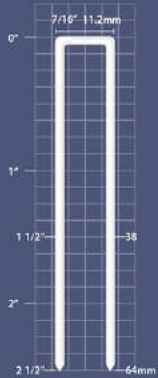

## Staplers

16 GA Medium Crown Stapler



### LU-964F

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Air Deflector
- Heavy Duty, Well Balanced
- Sequential Fire Trigger Available (#25205301A)

#### Fasteners

- Compatible with Bostitch B5C4, Max 9T, Omer S4, Prebena S Series
- 0.063 x .055" / 1.6 x 1.4mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.9 kgs	343 x 97 x 307mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.5 lbs	13.5 x 3.8 x 12.1"	85 - 110 psi	140 staples

### LU-964F



## Staplers

14GA Wide Crown Stapler, Light Duty



### LU-1438.1

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Air Deflector
- Heavy Adjustable Air Deflector
- Sequential Fire Trigger Available (#34903501A)

#### Fasteners

- 14 Gauge Staples
- Compatible with Bostitch 538S214, Paslode 4150-W14,
- Spotnails MS 2440
- Ø .070x .082" / 1.8 x 2.1mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.1 kgs	356 x 95 x 290 mm	6 - 8 kg/cm <sup>2</sup>	118 Staples
6.82 lbs	14.01 x 3.74 x 11.41"	80 - 110 psi	118 Staples

### LU-1438.1



## Staplers

15 GA Medium Crown Stapler



### LU-1580F

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Air Deflector
- Heavy Duty, Well Balanced
- Sequential Fire Trigger Available (#25205301A)

#### Fasteners

- Compatible with Duo-Fast 1500, Haubold 7900, Senco Q Series
- 0.075 x .067" / 1.9 x 1.7mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.9 kgs	343 x 97 x 307mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.5 lbs	13.5 x 3.8 x 12.1"	85 - 110 psi	140 staples

### LU-1580F

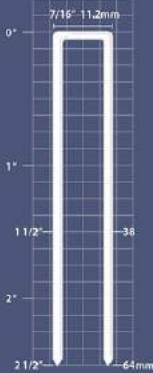

## Staplers

14GA Wide Crown Stapler, Heavy Duty



### LU-1438

#### Features

- Patented Quick Release Nose Cover
- 360° Adjustable Air Deflector
- Heavy Adjustable Air Deflector
- Sequential Fire Trigger Available (#25205301A)

#### Fasteners

- 14 Gauge Staples
- Compatible with Bostitch 538S214, Paslode 4150-W14,
- Spotnails MS 2440
- Ø .070x .082" / 1.8 x 2.1mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.1 kgs	356 x 95 x 290 mm	6 - 8 kg/cm <sup>2</sup>	118 Staples
6.82 lbs	14.01 x 3.74 x 11.41"	80 - 110 psi	118 Staples

### LU-1438



## Staplers

16GA Wide Crown Stapler,  
Light Duty



### LU-2538.1

#### Features

- Patented Quick Release Nose Cover
- 360° adjustable air deflector
- Sequential fire trigger available(#34903501A)

#### Fasteners

- 16 Gauge Staples
- Compatible with BOSTITCH BCS(16S2), Complete 16S2 Series
- Ø .063 x .055" / 1.6 x 1.4 mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.6 kgs	373 x 70 x 260mm	6 - 8 kg/cm <sup>2</sup>	140 staples
5.2 lbs	14.7" x 2.75" x 10.23"	80 - 110 psi	140 staples

LU-2538.1

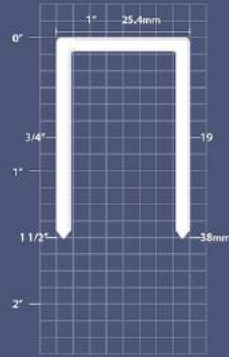

## Staplers

16GA Wide Crown Stapler,  
Light Duty



### LU-2638.1

#### Features

- Patented Quick Release Nose Cover
- 360° adjustable air deflector
- Sequential fire trigger available(#34903501A)

#### Fasteners

- 16 Gauge Staples
- Compatible with Complete P, Senco PW150R/P, Hitachi N5024A/11300, Duo-Fast RNS-17481/1716 cgr Series
- Ø .063 x .055" / 1.6 x 1.4 mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.6 kgs	373 x 70 x 260mm	6 - 8 kg/cm <sup>2</sup>	140 staples
5.2 lbs	14.7" x 2.75" x 10.23"	80 - 110 psi	140 staples

LU-2638.1

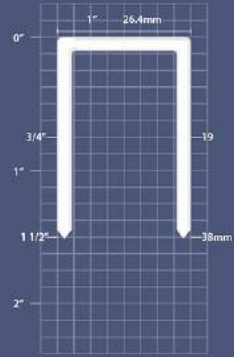

## Staplers

16 GA Wide Crown Stapler,  
Heavy Duty



### LU-2538

#### Features

- Patented Quick Release Nose Cover
- 360° adjustable air deflector
- Heavy adjustable air deflector
- Sequential fire trigger available(#25205301A)

#### Fasteners

- 16 Gauge staples
- Compatible with BOSTITCH BCS(16S2), Complete 16S2 Series
- Ø .063 x .055" / 1.6 x 1.4 mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.1 kgs	356 x 95 x 290 mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.82 lbs	14.01 x 3.74 x 11.41"	80 - 110 psi	140 staples

LU-2538

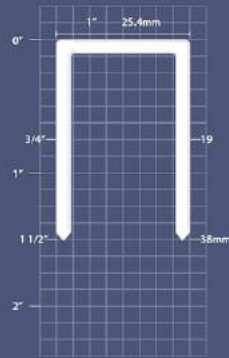

## Staplers

16 GA Wide Crown Stapler,  
Heavy Duty



### LU-2638

#### Features

- Patented Quick Release Nose Cover
- 360° adjustable air deflector
- Heavy adjustable air deflector
- Sequential fire trigger available(#25205301A)

#### Fasteners

- 16 Gauge staples
- Compatible with Complete P, Senco PW150R/P, Hitachi N5024A/11300, Duo-Fast RNS-17481/1716CGR Series
- Ø .063 x .055" / 1.6 x 1.4 mm


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.1 kgs	356 x 95 x 290 mm	6 - 8 kg/cm <sup>2</sup>	140 staples
6.82 lbs	14.01 x 3.74 x 11.41"	80 - 110 psi	140 staples

LU-2638

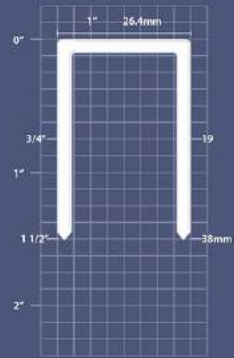

## Staplers - Fine Wire



Wire Gauge	Staple Type	F Series up to 16mm	AC Series up to 16mm	LAC Series up to 16mm	Auto series up to 16mm	AC series up to 25mm
23	SJK	LU-SJK16				
23	71	LU-7116F	LU-7116AC	LU-7116LAC	LU-7116.1AUTO LU-7116.1AUTO/LM	
23	14		LU-1416AC			
23	23	LU-2316F				
22	10F	LU-1016F	LU-1010FAC		LU-1016AUTO	
21	97	LU-9716F				LU-9725AC
21	84		LU-8416AC			
21	80	LU-8016F	LU-8016AC	LU-8016LAC	LU-8016.1AUTO LU-8016.1AUTO/LM	LU-8025AC
20	4J					LU-425JAC
20	10J	LU-1016J	LU-1013JAC		LU-1016AUTO	LU-1025JAC
20	A11				LU-1116AUTO/LM	
20	50		LU-5018AC			
19	64					LU-6432, LU-6432LM LU-6432EN/LM

## Staplers - Medium Wire



Wire Gauge	Staple Type	up to 25mm	up to 32mm	up to 40mm Light Duty	up to 40mm Heavy Duty	up to 40mm Heavy Duty
18	90	LU-9025AC	LU-9032AC	LU-9040LAC	LU-9040HAC	LU-9040KT
18	92	LU-9225AC	LU-9232AC	LU-9240LAC	LU-9240HAC	
18	G	LU-G25AC	LU-G32HAC	LU-G40LAC		
18	500			LU-50040LAC		
18	94			LU-9438AC		

## Staplers - Heavy Wire



Wire Gauge	Staple Type	Light Duty up to 50mm	Heavy Duty up to 50mm	Heavy Duty up to 64mm
17	O	LU-851LC1		
16	N	LU-851LC1	LU-851F2	LU-864F
16	KG	LU-851LC1	LU-851KGF2	LU-864KGF
16	9			LU-964F
15	Q			LU-1580F



Specialty p 58-66

## Pneumatic Hog Ring Tools

LPHC




### Features

- Available in Short (S = 25mm), Medium (M = 40mm) and Long (L = 48mm) Nose Working Length for Different Applications
- Comfortable Ergonomic Rubber Handle
- Light Weight and Well Balanced
- Adjustable Exhaust Deflector
- Steel Casted Trigger for Enhanced Durability
- Low Noise

### Applications

- Bag Closure
- Cage Grid Secure
- Auto Seat
- Wire Mesh Closure
- Label Attachment
- Spring Bed / Mattress

### Model coding system:



### Tool Specifications


Model	WL	C-Ring Type		Tool Weight	Magazine Capacity	Similar to Meihotech	Similar to Stanley	
LPHC-A815-S	25mm 1"	Ø 1.8mm .070"	19mm 3/4"	7.9 - 10.7mm 5/16 - 13/32"	1.40 kgs 0.64 lbs	100 pcs	MC-6, MC-6LW	SC7
LPHC-A815-M	40mm 9/16"	15 Gauge 15G100		1.45 kgs 0.66 lbs			MC-6LNA, MC-6LNALW	SC7E
LPHC-A815-L	48mm 2"			1.50 kgs 0.68 lbs				SC77XE
LPHC-A515-S	25mm 1"		19mm 3/4"	4.8 - 8.7mm 3/16 - 11/32"	1.40 kgs 0.64 lbs		MC-6CA, MC-6CALW	SC7C
LPHC-A816-S	25mm 1"	Ø 1.6mm .063"	19mm 3/4"	7.9 - 10.7mm 5/16 - 13/32"	1.40 kgs 0.64 lbs	110 pcs		
LPHC-A816-M	40mm 9/16"	16 Gauge 16G110		1.45 kgs 0.66 lbs				
LPHC-A816-L	48mm 2"			1.50 kgs 0.68 lbs				
LPHC-A516-S	25mm 1"		19mm 3/4"	4.8 - 8.7mm 3/16 - 11/32"	1.40 kgs 0.64 lbs			SC743
LPHC-C316-S	25mm 1"	Ø 1.6mm .063" 16 Gauge 516G100	12.5mm 1/2"	3.2 - 5.6mm 1/8 - 7/32"	1.40 kgs 0.64 lbs	100 pcs	MC-660	SC760

## Pneumatic Hog Ring Tools

LPHCN



### LPHC Series Tools Conventional C Ring Style




### LPHCN Series Tools New C Ring Style



Model	WL	C-Ring Type		Tool Weight	Magazine Capacity	Similar to Meihotech	Similar to Stanley
LPHCN-A815-S	25mm 1"	Ø 1.8mm .070"		7.9 - 10.7mm 5/16 - 13/32"	1.40 kgs 0.64 lbs		
LPHCN-A815-M	40mm 9/16"	15 Gauge 15G100N	19mm 3/4"		1.45 kgs 0.66 lbs	100 pcs	
LPHCN-A815-L	48mm 2"				1.50 kgs 0.68 lbs		

## Mattress Stapler MS-1619

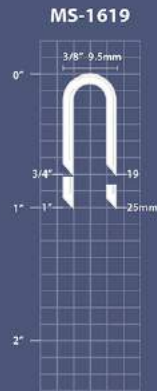

### Features

- Drives Staples into Hard-To-Reach Places Such as Bottom of Coil Springs
- Powerful and Quick Fastener Placement
- Single or Double Staple Fire Versions Available: Single Staple: Shoots 1 Staple Per Cycle  
Double Staple: Shoots 2 Staples Per Cycle, for Increased Efficiency of Staple Placement
- Tools Available:

Model	Staples used	Firing Version
MS-1619	19mm	Double Staple
MS-1619S	19mm	Single Staple
MS-1625	19 & 25mm	Double Staple
MS-1625S	19 & 25mm	Single Staple

### Fasteners

- U-Crown Diversion Points Staples
- Similar to Bostitch BSC31
- $\square$  .062 x .057" (1.6 x 1.4mm)

### Applications

- Bedding
- Spring-Up
- Assembly

### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
3.5 kgs	470 x 35 x 830mm	5 - 7 kg/cm <sup>2</sup>	180 staples
7.7 lbs	18.5 x 1.4 x 32.7"	70 - 100 psi	180 staples

## Nail Puncher NP-50



### Features

- Powerful
- Fast for Increased Efficiency

### Fasteners

- Length: 25 - 57mm (1 - 2 1/4")
- $\varnothing$  : .083 - .090" (2.1 - 2.3mm)

### Applications

- Remove Nails from Wood for Pallet Recycling

### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1 kgs	245 x 65 x 225mm	5 - 6 kg/cm <sup>2</sup>	1
2.2 lbs	9.7 x 2.6 x 8.9"	70 - 85 psi	1

## Nail Puncher NP-57E



### Features

- Powerful
- Fast for Increased Efficiency

### Fasteners

- Length: 25 - 57mm (1" - 2 1/4")
- $\varnothing$  : .083 - .090" (2.1 - 2.3mm)

### Applications

- Remove Nails from Wood for Pallet Recycling

### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.8 kgs	263 x 282 x 100mm	5 - 6 kg/cm <sup>2</sup>	1
4.0 lbs	10.4 x 11 x 3.9"	70 - 85 psi	1

## Nail Puncher

### NP-70E



#### Features

- Powerful
- Fast for Increased Efficiency

#### Fasteners

- Length: 1 3/4 - 2 3/4" (45 - 70mm)
- Ø: .099 - .113" (2.5 - 2.9mm)

#### Applications

- Remove Nails from Wood for Pallet Recycling

#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.6 kgs	295 x 305 x 120mm	5 - 6 kg/cm <sup>2</sup>	1
5.7 lbs	11.6 x 12 x 4.7"	70 - 85 psi	1

## Stapler

2-in-1 Medium & Narrow Crown Stapler for Polymer



#### Features

- Hammer Cap
- Bottom Load, Jam Free Magazine
- Rear Exhaust Cover
- Slim Long Nose for Easy Aiming
- Accepts Both Narrow & Medium Polymer Staples

#### Fasteners

- 1/2" (12.8mm) & 3/8" (10mm) Crown Polymer Staples


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
0.88 kgs	219 x 43 x 144mm	4 - 7 kg/cm <sup>2</sup>	75 - 80 Staples
1.95 lbs	8.6 x 1.7 x 5.7"	60 - 100 psi	75 - 80 Staples

LU-8016FP

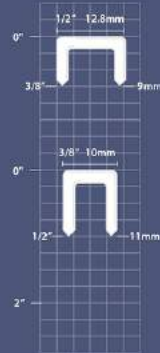

## Corrugated Fastener Tool

### CF-15AA



#### Features

- Bottom Load Magazine
- Easy Magazine Adjustment
- Jam-Free Magazine
- Powerful

#### Fasteners

- Compatible with Bea W, Duo-Fast CF, Haubold WN, Senco SC2, Omer CF Series


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.7 kgs	286 x 94 x 312mm	5.5 - 7 kg/cm <sup>2</sup>	100 fasteners
5.95 lbs	11.3 x 3.7 x 12.3"	80 - 100 psi	100 fasteners

CF-15AA Senco Type



## Corrugated Fastener Tool

### CF-15AP



#### Features

- Bottom Load Magazine
- Easy Magazine Adjustment
- Jam-Free Magazine
- Powerful

#### Fasteners

- Compatible with Paslode Series


#### Applications



#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.7 kgs	286 x 94 x 312mm	5.5 - 7 kg/cm <sup>2</sup>	100 fasteners
5.95 lbs	11.3 x 3.7 x 12.3"	80 - 100 psi	100 fasteners

CF-15AP Paslode Type





## Palm Nailer

**PTS-8400**



### Features

- Cost Saving
- Ergonomic Handle
- Multiple Impact
- Leather Glove Available for Enhanced Comfort

Suggested Air Pressure for Different Range of Nail Sizes:

Nail size		Air pressure	
mm	inch	kg / cm <sup>2</sup>	psi
20 - 25	3/4 - 1"	3.5 - 5.5	50 - 80
25 - 38	1 - 1 1/2"	5.5 - 7.0	80 - 100
38 - 165	1 1/2 - 6 1/2"	7.0 - 8.0	100 - 120

### PTS-8400 KIT Accessories Include:

- Plastic Carry Case
- (L) Magnetized Guide Tip Unit - for Nail Head Ø Up to 10mm
- (S) Magnetized Guide Tip Unit - for Nail Head Ø Up to 5mm
- Magnetized Guide Tip Unit
- Guide Tip - for Larger Diameter Nails or Buttons for Bags or Leather Goods
- Steel Hammer Unit
- Rubber Hammer Unit
- Chisel Unit
- Leather Glove for Enhanced Comfort
- Maintenance Kits-O-Rings, Wrenches and Oil


### Applications



### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1 kgs	124 x 86 x 134mm	3.5 - 8 kg / cm <sup>2</sup>	1
2.2 lbs	4.9 x 3.4 x 5.3"	50 - 120 psi	1

PTS-8400

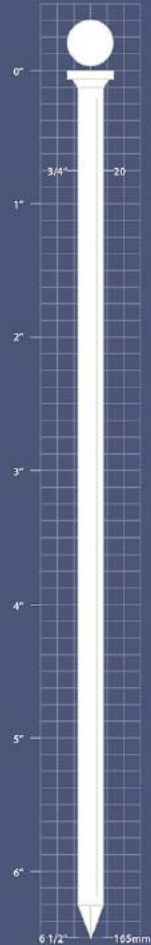

## Metal Connector Nailer

**AMC-38**



### Features

- Light Weight, Impact Design to Reach The Tightest Corners
- Nail Point Sticks Out for Accurate Metal Connector Hole Aiming and Fastening
- Sequential Trigger for Precise Nail Placement
- Swivel Belt Hook for Both Left And Right-Handed Users
- Over-Molded Rubber Grip for Added Comfort and Less Fatigue
- Floating Pusher for Quick Re-Loading of Nails
- Dry-Fire Lock to Prevent Un-Intended Nailing
- 360° Adjustable Exhaust Deflector
- Swivel Air-Inlet for Less Hose Tangling

### Fasteners

- 34° Paper Tape Round Head Nails
- Ø: .131 - .162" / 3.3 - 4.1mm

### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.25 kgs	365 x 90 x 295mm	5.5 - 7 kg/cm <sup>2</sup>	29 nails
4.95 lbs	14 3/8 x 3 1/2 x 11 5/8"	80 - 100 psi	29 nails

### Applications

- Joist Hangers
- Metal Connectors

AMC-38



## 18 GA Flooring Stapler

**AFS-9040**



### Features

- Light & Well Balanced
- Powerful, Drives into Hardwood at Ease.
- Quick Adjustable "Legs" and "Shoe" to Adapt 6-16mm (1/4 - 5/8") Thick Tongue-and-Groove Hardwood Floors
- Drives Staples at A Perfect 45° Angle Every Time and Avoids Tongue Splitting and Floor Surface Damage

### Fasteners

- 90 Series Staples
- Compatible With Complete L, Atro 90, BeA 90, Duo-Fast 1800, Hitachi 11 100, Haubold 6000, ISM 90, JK 781 & Senco L Series
- □ .050 x .040" / 1.25 x 1.0mm


### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
1.78 kgs	360 x 90 x 300mm	5 - 7 kg/cm <sup>2</sup>	160 staples
3.9 lbs	14 1/8 x 3 1/2 x 11 7/8"	70 - 100 psi	160 staples

### Applications

- Pre-Finished Groove-and-Tongue Hardwood Floor Installation

AFS-9040

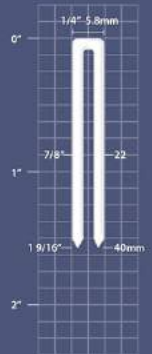

## Specialty

Pneumatic Clinch Nailer



### Applications



## CN-70CL

### Features

- Ergonomic Design, Ideal for Pallet Repairs
- Powerful, Rapid Nailing Performance
- Well Protectors Equipped
- Top Exhaust Cap Available

### Fasteners

- 15° Flat Wire Collated Clinch Nails
- Length: 1-3/4"~2-1/4" (45-57mm)
- Shank Diameter : .090-.113" (2.3-2.9 mm)
- Shank Type : Smooth, Ring & Screw

### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
7.6 kgs	370 x 148x 400 mm	5 - 7 kg/cm <sup>2</sup>	225-300 nails
16.76 lbs	14.6" x 5.83" x 15.75"	70 - 100 psi	225-300 nails

CN-70CL



## Specialty

Hardwood Flooring Stapler



### Applications



## HWFS-50

### Features

- Patented Quick Release Nose Cover
- Drives Staples at a Perfect 45° Angle
- Powerful, Drives Into Hardwood at Easy
- Avoid Tongue Splitting and Floor Surface Damage
- Extra-Wide Composite Base Plate for Added Stability
- Long Reach Handle for Comfort and Easy Operation
- Top Load Long Magazine


### Fasteners

- Compatible with Hitachi 04722H/24H, Bostitch BCS1512/14/16, Complete BCS1500 Series
- □.071" x .064" / 1.8 x 1.6 mm

### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
4.5 kgs	453 x 92 x 560 mm	5 - 7 kg/cm <sup>2</sup>	140 staples
9.92 lbs	17.83" x 3.62" x 22.05"	70 - 100 psi	140 staples

HWFS-50

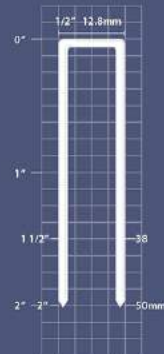

Carton Closing p 68-73

## Carton Closing Staplers

### Strip Series



#### Features

- Ergonomic Handle
- Light Weight and Well Balanced
- Depth of Clinch and Penetration Adjustable
- Raised Top Cap for Enhanced Durability
- Low Noise

#### Fasteners

Model	Staple Type	Crown	Length	Shank Diameter
CS-19A	A strip	34.7mm 1 3/8"	15 & 18mm 5/8 & 3/4"	2.3 x 0.9mm .090 x .037"
CS-19C	C strip	32mm 1 1/4"	15 & 18mm 5/8 & 3/4"	1.9 x 0.9mm .074 x .037"
CS-19SW	SW7437 strip	34.5mm 1 3/8"	15 & 18mm 5/8 & 3/4"	1.9 x 0.9mm .074 x .037"
CS-22A	A strip	34.7mm 1 3/8"	18 & 22mm 3/4 & 7/8"	2.3 x 0.9mm .090 x .037"
CS-22C	C strip	32mm 1 1/4"	18 & 22mm 3/4 & 7/8"	1.9 x 0.9mm .074 x .037"
CS-229040	9040 strip	34.5mm 1 3/8"	18 & 22mm 3/4 & 7/8"	2.3 x 0.9mm .090 x .037"

#### Manual Tools

Model	Staples Type	Length
MCS-19A	A strip	15 & 18mm
MCS-19C	C strip	5/8 & 4/3"
MCS-19SW	SW7437 strip	

#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.0 kgs	335 x 115 x 220mm	5 - 7 kg/cm <sup>2</sup>	100
4.4 lbs	13 1/8 x 4 1/2 x 8 5/8"	70 - 100 psi	100



## Carton Closing Staplers

### Strip Series



#### Features

- C Strip Staple Type
- Ergonomic Handle
- Light Weight and Well Balanced
- Raised Top Cap for Enhanced Durability
- Long Magazine for 150 Staples
- Two-piece magazine design more durable

#### Fasteners

Model	Staple Type	Crown	Length	Shank Diameter
ACS-15C	C Strip	32 mm 1 1/4"	15 mm 5/8"	1.9x0.9 mm .074 x .037"
ACS-18C	C Strip	32 mm 1 1/4"	18 mm 3/4"	1.9x0.9 mm .074 x .037"
AMS-15C	C Strip	32 mm 1 1/4"	15 mm 5/8"	1.9x0.9 mm .074 x .037"
AMS-18C	C Strip	32 mm 1 1/4"	18 mm 3/4"	1.9x0.9 mm .074 x .037"

#### Tool Specifications

Model	Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
ACS-15C	2.4 kgs	530 x 90 x 320mm	5 - 7 kg/cm <sup>2</sup>	150 staples
ACS-18C	5.3 lbs	20.8 x 3.5 x 12.6"	70 - 100 psi	150 staples
AMS-15C	2.5 kgs	420 x 90 x 125mm	5 - 7 kg/cm <sup>2</sup>	150 staples
AMS-18C	5.5 lbs	16.5 x 3.5 x 8.5"	70 - 100 psi	150 staples

## Carton Closing Staplers

### Coil Series



#### Features

- Ergonomic Handle
- Light Weight and Well Balanced
- Ideal for High Volume and Efficient Applications
- Quick Release to Prevent Jams
- Tightness and Depth of Clinch Adjustable
- Raised Top Cap for Enhanced Durability
- Low Noise

#### Fasteners

Model	Staple Type	Crown	Length	Shank Diameter
CCS-19SWC	SWC Coil	34.5mm 1 3/8"	15 & 18mm 5/8 & 3/4"	1.9 x 0.9mm .074 x .037"
CCS-19RR	RR1 Coil	32mm 1 1/4"	15 & 18mm 5/8 & 3/4"	1.9 x 0.9mm .074 x .037"
CCS-19GR	GR1 Coil	32mm 1 1/4"	15 & 18mm 5/8 & 3/4"	2.3 x 0.9mm .090 x .037"
CCS-22GR	GR1 Coil	32mm 1 1/4"	18 & 22mm 3/4 & 7/8"	2.3 x 0.9mm .090 x .037"
CCS-19T	T Coil	32mm 1 1/4"	15 & 18mm 5/8 & 3/4"	1.9 x 0.9mm .074 x .037"

#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
2.4 kgs	233 x 115 x 230mm	5 - 7 kg / cm <sup>2</sup>	1000
5.28 lbs	9 1/8 x 4 1/2 x 9"	70 - 100psi	1000

## Pneumatic Foot Bottomers

### LPB & LPS Series



LPB Bottomers

LPS Side Bottomers

#### Features

- Suggested for High Volume Production Outputs – 50 to 100 Carton Bottoms Per Hour
- Equipped with A Safety Foot Pedal

#### Fasteners

Bottomers	Side Bottomers	Staple Type	Crown	Length
LPB-19SW	LPS-19SW	SW7437 strip	34.5mm 1 3/8"	15 & 18mm 5/8 & 3/4"
LPB-22A	LPS-22A	A strip	34.7mm 1 3/8"	15, 18 & 22mm 5/8, 3/4 & 7/8"
LPB-22C	LPS-22C	C strip	32mm 1 1/4"	15, 18 & 22mm 5/8, 3/4 & 7/8"
LPB-229040	LPS-229040	9040 strip	34.5mm 1 3/8"	15, 18 & 22mm 5/8, 3/4 & 7/8"

#### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure	Load Capacity
22.7 kg	830 x 600 x 1245mm	5.5 - 6kg/cm <sup>2</sup>	200
50 lbs	32.6 x 23.6 x 49"	80 - 85 psi	200

#### Mechanical Foot Bottomers Are Also Available:

Bottomers	Side Bottomers	Staple Type
LMB-19SW	LMS-19SW	SW7437 strip
LMB-22A	LMS-22A	A strip
LMB-22C	LMS-22C	C strip
LMB-229040	LMS-229040	9040 strip

## Jumbo Carton Closing Staplers

**CJ-38**



### Features

- Comfortable Rubber Grip
- Rear Exhaust
- Trigger Actuated
- Depth of Clinch and Penetration Adjustable
- Designed for Tri-Wall Corrugated Cardboards (15 - 24mm Total Thickness)


### Fasteners

Model	Similar to	Crown Size	Shank Diameter	Leg Length	Load Capacity
CJ-25	Bostitch SW9060	32mm 1 1/4"	2.3 x 1.4mm .090 x .060"	25mm 1"	100
CJ-32	Bostitch SW9060	32mm 1 1/4"	2.3 x 1.4mm .090 x .060"	28, 32, 35mm 1 1/8, 1 1/4, 1 3/8"	100
CJ-38	Bostitch SW9060	32mm 1 1/4"	2.3 x 1.4mm .090 x .060"	38mm 1 1/2"	100

### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure
6 kgs	360 x 174 x 335mm	5 - 7 kg / cm <sup>2</sup>
13.2 lbs	14 1/8 x 6 7/8 x 13 1/8"	70 - 100psi

**CJ-38**

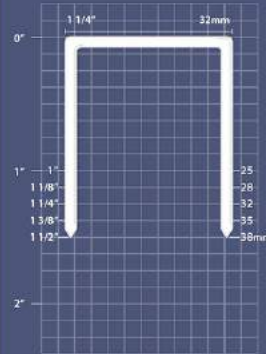

## Specialty Tools

Pneumatic Stapling Pliers

**SP50 Series**



CL Anvil

### Features

- Powerful Shuttle Blade Provides Pre-Compression Prior to and During The Stapling Operating - Giving A Strong, Tight Closure Without Breaking The Corrugated Surface
- 6" x 1" High Throat Allows Flexibility of Staple Placement and Limits Interference from Obstacles Such As Box Flanges
- C Anvils (CL or CR Available for Sealing Partial Overlap Cartons)
- Penetrates and Securely Fastens up to 2 Thicknesses of Double-Wall:
  - 2x AB Flute or 4x C Flute Boards (A Flute = 3/16" or 4.8mm Thick) (B Flute = 1/8" or 3.2mm Thick) (C Flute = 5/32" or 4.0mm Thick)

### Fasteners

Tools	Staple Type	Similar to	Crown Size	Shank Diameter	Leg Length	Load Capacity
SP50-108-A	SB 103020	Bostitch SB 103020	12.95mm 1/2"	0.50 x 2.60mm .020 x .103"	10, 12, 15mm 3/8, 1/2, 5/8"	102
SP50-58-A	SB 5019	Bostitch SB 5019	12.85mm 1/2"	0.48 x 1.25mm .019 x .050"	6, 10, 12, 15mm 1/4, 3/8, 1/2, 5/8"	108
SP50-777-A	777	JK 777	12.3mm 1/2"	0.65 x 2.25mm .026 x .090"	10, 12, 15mm 3/8, 1/2, 5/8"	140
SP50-779-A	779	JK 779	12.3mm 1/2"	0.63 x 1.3mm .025 x .050"	8, 10, 12, 14, 16mm 5/16, 3/8, 1/2, 9/16, 5/8"	250


### Applications

- Corrugated Containers
- Trays & Lids
- End Caps
- Headers & Bags
- Container Inserts
- Bedding


### Tool Specifications

Weight	Dimensions (LxWxH)	Operating Pressure
2.2 kg	370 x 55 x 240mm	2.5 - 3.9kg/cm <sup>2</sup>
4.8 lbs	14 1/2 x 2 1/8 x 9 1/2"	36 - 55 psi


**SP103020**




**SB5019**



**777**



**779**



## Accessories

### Hose Reels



#### Features

- Material: Polyurethane Braid Hose
- Maximum Working Pressure: 220PSI / 15BAR
- Working Temperature: -20° C to +60° C
- Features: 360° Rotary Base for High Efficiency

#### Hose Reels

Model	Hose Size MM	Inch	Hose Length MM	Feet
HR026530	6.5	1/4	30	100
HR026550	6.5	1/4	50	165
HR028020	8.0	5/16	20	66
HR028030	8.0	5/16	30	100
HR028040	8.0	5/16	40	132
HR028520	8.5	11/32	20	165
HR028530	8.5	11/32	30	100
HR029520	9.5	3/8	20	66
HR029530	9.5	3/8	30	100
HR021020	10.0	13/32	20	66

#### Bulk Hoses

Item	Hose Size (IDxOD)	Length (M)
PUB-050800	5 x 8mm	10, 20, 30, 50, 100
PUB-065100	6.5 x 10mm	10, 20, 30, 50, 100
PUB-080120	8 x 12mm	10, 20, 30, 50, 100
PUB-085125	8.5 x 12.5mm	10, 20, 30, 50, 100
PUB-100150	10 x 15mm	10, 20, 30, 50, 100
PUB-110160	11 x 16mm	10, 20, 30, 50, 100
PUB-130190	13 x 19mm	10, 20, 30, 50, 100

All Size of Re-coil Hoses Are Also Available.  
Contact Our Customer Service for More Information.




## Marketing Materials

### Point of Sale Advertisement



### Posters

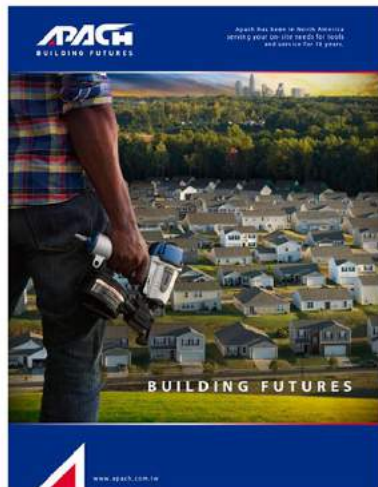

### APACH Window Decal (262mm x 158mm)




◦ AMKT0001

### APACH Header (600mm x 200mm)



◦ AMKT0002

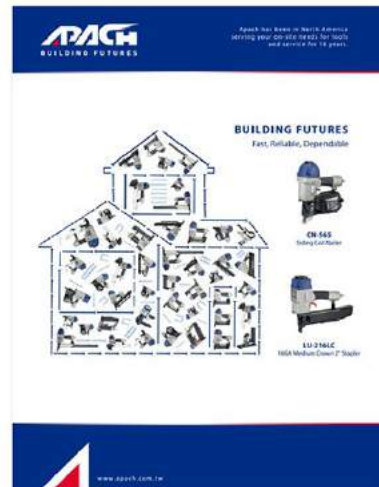

## Marketing Materials

### Packaging



### APACH Cap



◦ AMKT0003

### APACH T-Shirts



All Sizes of Shirts Available Upon Request

◦ AMKT0004 - Short Sleeve T-Shirts

A series of horizontal dotted lines for writing notes on page 78.

A series of horizontal dotted lines for writing notes on page 79.





*Pneumatic Tools*

## Contact Us

**Visit Our Website :** [www.spspneumatictools.com](http://www.spspneumatictools.com)

**Email Us :** [staplespackagingsolutions@gmail.com](mailto:staplespackagingsolutions@gmail.com)

**Sushil Mishra-** +91 7011218105

**Sales-** +91 9811579961

**Varun Tiwari-** +91 8595503657

**Phone** 011-47002673